



QUBE

PATH, WALL, & DIRECTIONAL

The Qube Series of compact and versatile luminaires are available in path light, wall mount, and directional configurations. Featuring a precision machined brass body and machined acrylic optics with a deep prismatic design that allows for uniform 120° distribution from a single lens.

- Lumens: 145-190
- 3 and 6 Watts
- 2700K, 3000K or 4000K (CRI 80 typ.)
- Dimming to <10% typ.
- Copper Core Technology™
- Solid Brass Construction

THE AURORALIGHT DIFFERENCE



We strive to elevate the standard in architectural lighting. We are inspired by the many ways our products help you create extraordinary projects. Our materials, our innovation, and lifetime warranty lead the industry today and will continue to do so for years to come. We invite you to experience the difference.

(877) 942-1179 | auroralight.com
Made in the USA

auroralight™
Elevating The Standard In Architectural Lighting

DISCOVER
—THE LATEST—
INNOVATIONS






QUADRANT

PATH LIGHTING

The LPL7-SQ is a classic design re-engineered and manufactured to a quality and performance standard never before available. Featuring a heavy duty architectural brass stem ingeniously coupled to the robust die-cast brass hood with no visible hardware. Available in two distributions and wattages.

- 3W or 7W Up to 259 lumens
- 2700K, 3000K, 4000K (CRI 80 typ.)
- Thermally Integrated®, Field Serviceable LED Module
- Dimming to <10% typ.
- Solid Brass Construction

(877) 942-1179

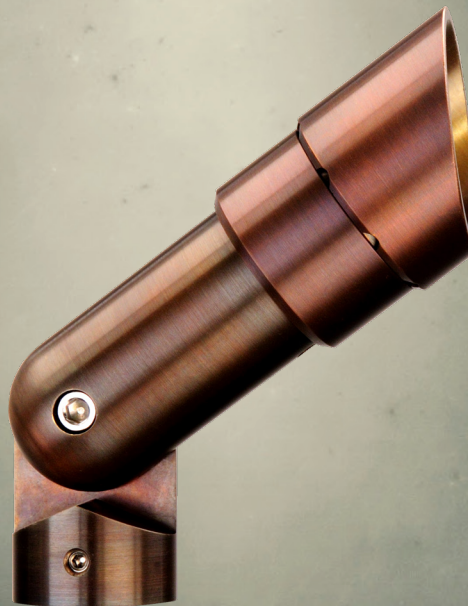

AGAVE

DIRECTIONAL LIGHTING

Don't be fooled by its small size, at a mere 4", the LSL10 Agave is high-performance, low energy LED micro-directional luminaire. Both attractive and functional, the Agave produces 100 lm/W and pairs with our exclusive AMS™ mounting system to provide a plethora of mounting possibilities to meet your every design need.

- 3 Watts and Up to 299 lumens
- 2700, 3000 or 4000K (CRI 80 typ.)
- Interchangeable UV & Shock Resistant Silicone TIR Optic (Patent Pending)
- Dimming to <10% typ.
- Solid Brass Construction

auroralight.com



MERIDIAN

PATH LIGHTING

The LSW8-PL is an ideal solution for uniform spacing and light levels in the absence of a structure. Its small aperture effectively shields against glare while allowing for excellent forward projection with even illumination side to side. Pair with our LSW8 step/wall light for design continuity throughout your project.

- 1.25 Watts and Up to 45 lumens
- 2700, 3000 or 4000K (CRI 80 typ.)
- Interchangeable UV & Shock Resistant Silicone TIR Optic (Patent Pending)
- Dimming to <10% typ.
- Solid Copper and Brass Construction

sales@auroralight.com