




HPL4-NAT

The compact size of the **HPL4 La Jolla** allows for it to be installed discretely into planters, making it ideal for illuminating pathways and intimate garden areas. Use anywhere a less obvious light source is desired. With a timeless design, precision manufacturing, and the highest quality materials, our HPL luminaires are a perfect solution. Every HPL series path light gives you a choice of a Thermally Integrated® Field Serviceable LED Module or traditional Halogen lamp. Using Copper Core Technology®, the HPL module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency, and long life!

Features include:

- Interchangeable LED Module in 2.5 or 3.5 Watts
- Up to 123 Lumens
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

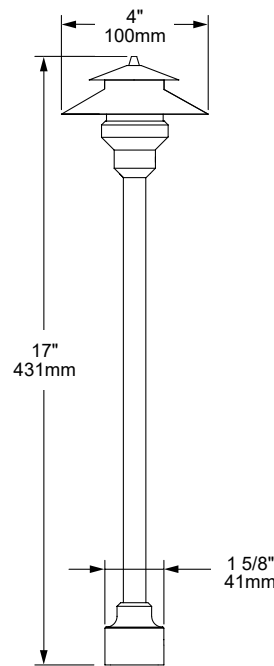

LED Module with Copper Core

Gold-Plated Pins

Copper Core Heat Sink

Primary Thermal Contact

Secondary Heat Sink

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.

12V

THERMALLY INTEGRATED

IDA (DARK SKY APPROVED)

IP67

SEE NEXT PAGE FOR ORDERING INFORMATION







TYPE:
CAT. #: HPL4-

HPL4 LA JOLLA

ORDERING GUIDE: ^{Prefix} **HPL4** H (HIGH PERFORMANCE) PL (PATH LIGHT) 4 (INCHES)

☐ INDICATES REQUIRED FIELD ☐ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)


QUICK SPEC SKU **HPL4-327-GS-NAT**

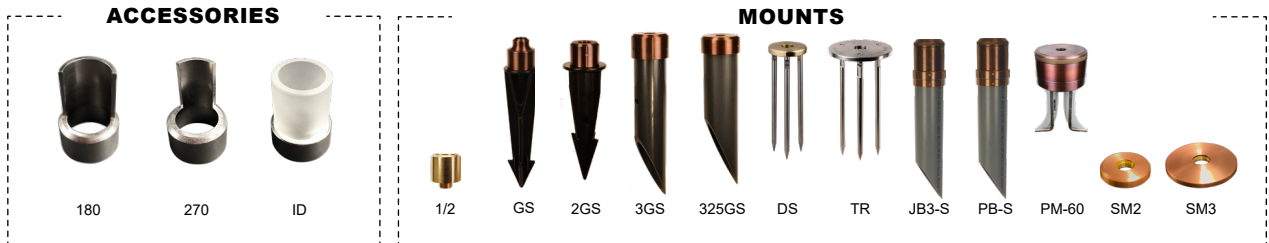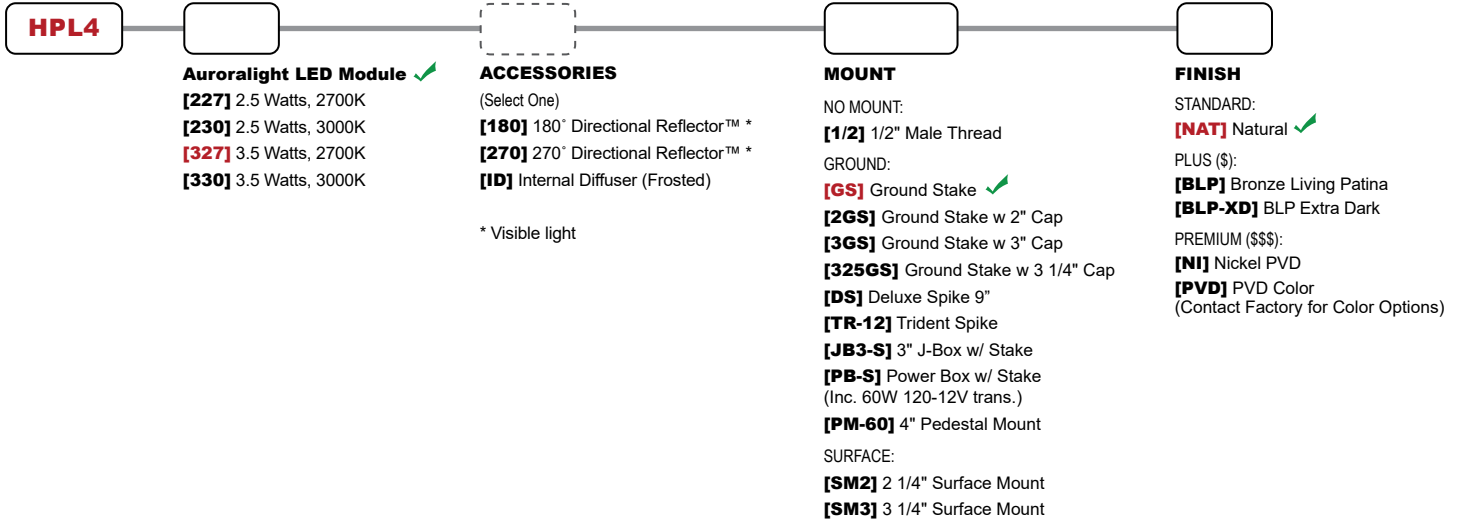

PHOTOMETRIC OVERVIEW

Information based on 3.5 Watts. To download more in-depth IES photometric data, visit auroralight.com/product/hpl4-la-jolla/

Mounting Height - 2 Feet

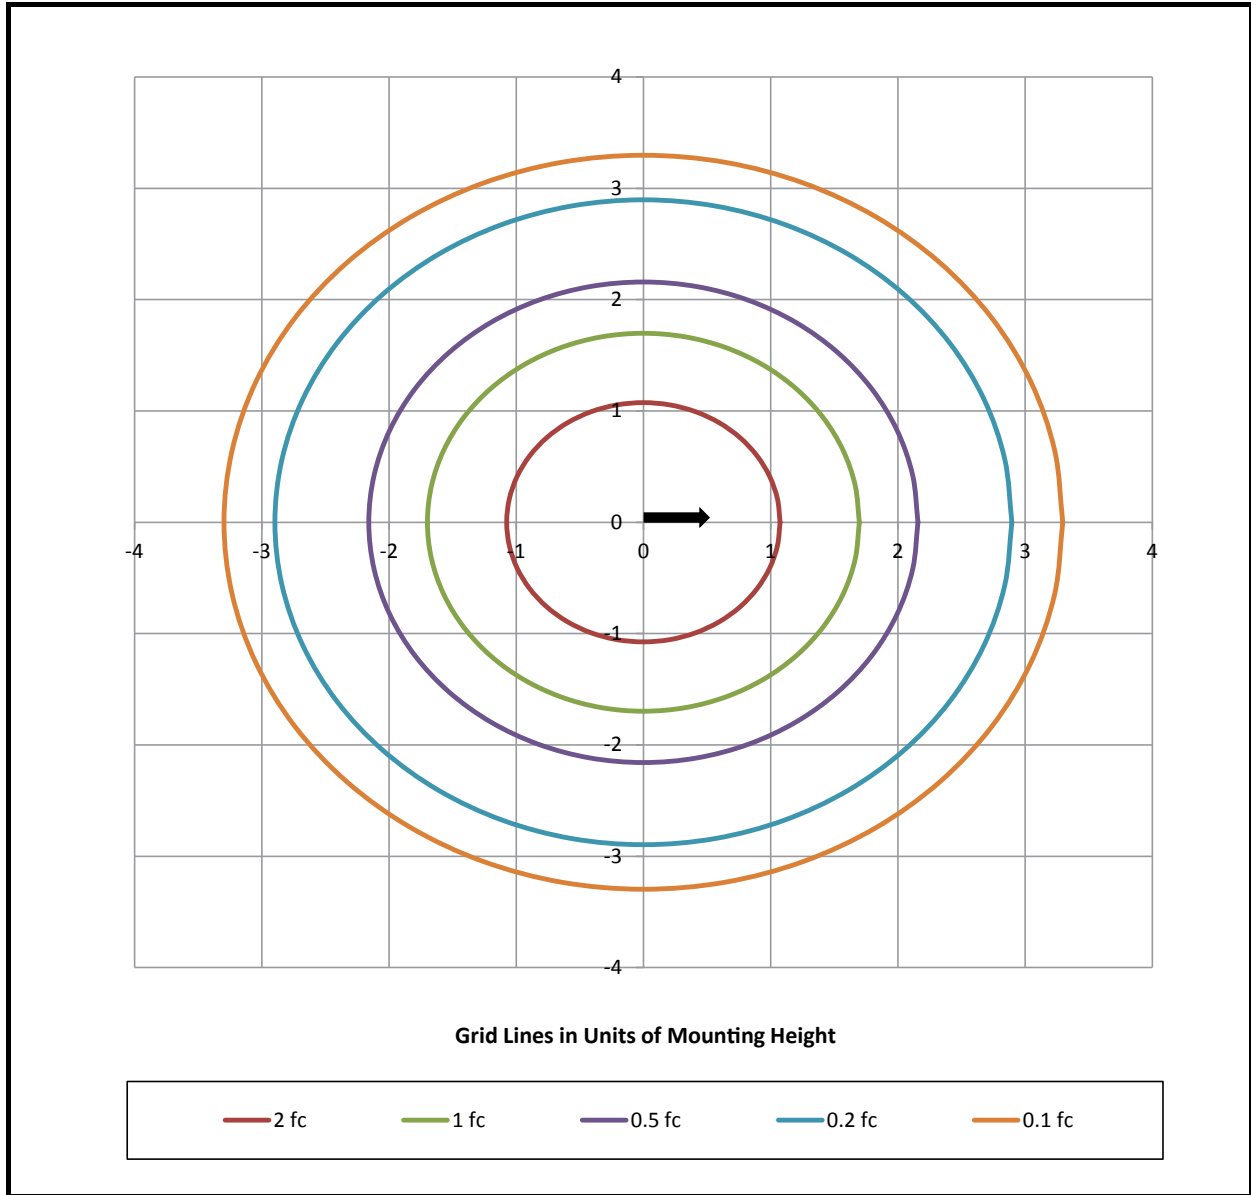

BUG Rating B0 U1 G0

