







HWM16-LM TELLURIDE

The **HWM16-LM Telluride** is engineered around Auroralight's Thermally Integrated® Field Serviceable LED Module. Utilizing our Copper Core Technology®, internal temperatures are monitored and self-regulated; this guarantees exceptional performance and long service life. The Telluride includes our Storm Drain™ lens drainage allowing water and dirt to wash away for optimal light transmission. The HWM16 is ideal for up/down lighting and wall grazing outdoor features such as columns, patios, or pergolas.

Features include:

- Interchangeable LED Module in 4, 6, 8 or 12 Watts up to 676 Lumens
- 6 Interchangeable PMMA Acrylic Optics from 20° to 75°
- 2700K (80 & 90 CRI), 3000K (80 CRI), or 4000K (80 CRI)
- Thermally Integrated® w/ Copper Core Technology®
- Storm Drain™ Lens Drainage System
- 12V Integral Constant Current Driver (Remote 12V AC/DC Transformer Required)
- Dimmable to <10% (TRIAC/Forward Phase) via Compatible Transformer
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Brass Construction

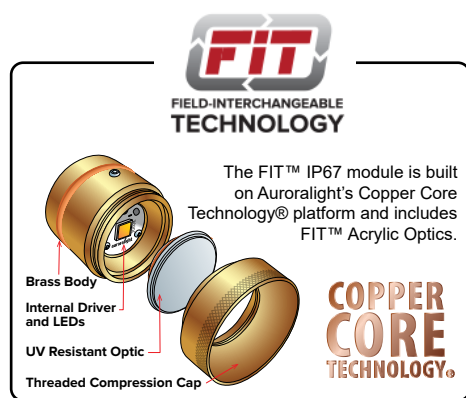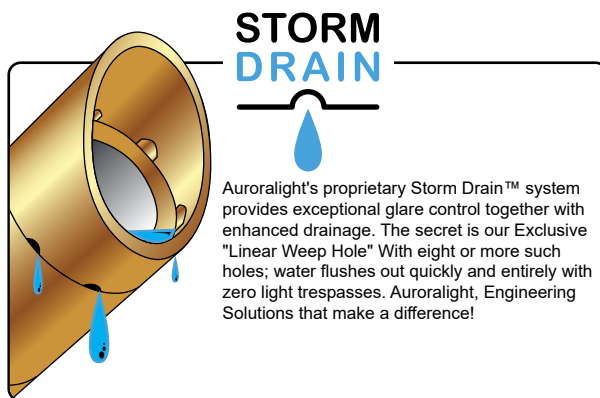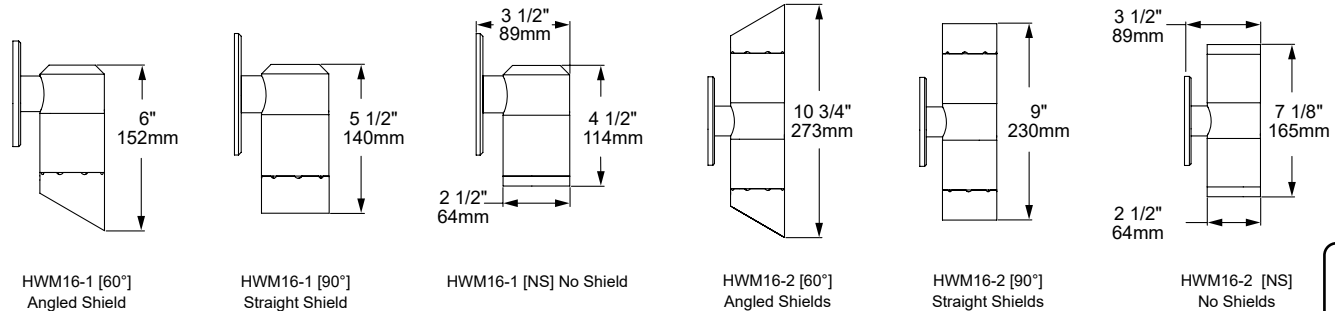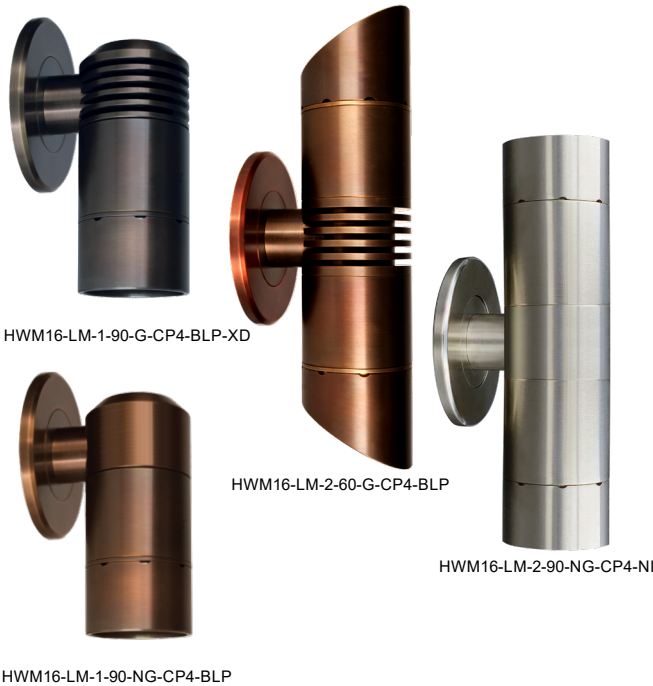

SEE NEXT PAGE FOR ORDERING INFORMATION



HWM16-LM TELLURIDE

Prefix


ORDERING GUIDE: **HWM16-LM** H (HIGH PERFORMANCE) WM (WALL MOUNT) 16 (SERIES) L (LIGHT) M (MODULE)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **HWM16-LM-1-50-NG-8-W-27-H-CP4-BR-NAT**

HWM16-LM						
	FIXTURE STYLE	SHIELD ✓	BODY ✓	WATTAGE ✓	OPTIC	LED COLOR ✓
	[1] Single ✓ [2] Double*	[50] 50° Angled ✓ [60] 60° Angled [90] 90° Straight [NS] No Shield	[G] Grooves ✓ [NG] No Grooves	[4] 4 Watts ✓ [6] 6 Watts [8] 8 Watts [12] 12 Watts	STANDARD: ✓ [N] 20° Narrow [M] 30° Medium [W] 40° Wide [WF] 50° Wide Flood [SF] 60° Super Flood [UF] 75° Ultra Flood PLUS (\$): [A] All Optics Kit	[27] 2700K, 80 CRI [279] 2700K, 90 CRI [30] 3000K, 80 CRI [40] 4000K, 80 CRI
	NOTE: Double Fixture Style selection of Shield, Wattage, Optic and LED Color will apply to both, for differing contact factory					
	* Indicates NOT Dark Sky approved					

ACCESSORIES	MOUNT	FINISH
SELECT UP TO TWO: [H] Hex Baffle [SBH] Stepped Baffle /Hex Baffle Assembly [L] Linear Spread [P] Prismatic Lens [MP] Micro Prismatic [F] Frost (Diffusion)	[CP35-BR] 3x5" Brass Cover Plate [CP4-BR] 4" Brass Cover Plate ✓ [CP45-BR] 4 1/2" Brass Cover Plate [PC-60-1] 3 1/2" Power Canopy Incl. 60W 120-12V Integral Transformer NOTE: For recessed J-Box, see RJB cut sheet NOTE: Most common configurations listed above. See product cut sheets for all available options.	STANDARD: [NAT] Natural ✓ PLUS (\$): [BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark PREMIUM (\$\$\$): [NI] Nickel PVD [BG] Black Gloss PVD [BS] Black Satin PVD [BZ] Bronze PVD [BZ-XD] Dark Bronze PVD

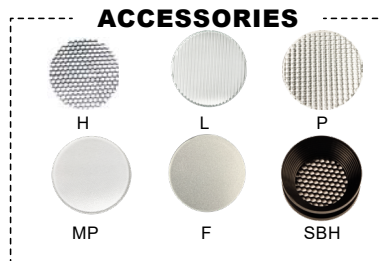


HWM16-LM TELLURIDE


PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/hwm16-lm-telluride/


12 Watts 3000K 20° (NARROW) No Shield 549.7 LUMENS • CBCP 2010 • BUG B1 U0 G0 AURORALIGHT HWM16-LM-12-N-30		
30 FT	2.23	10.2
26 FT	2.97	8.87
22 FT	4.15	7.51
18 FT	6.20	6.14
14 FT	10.3	4.78
10 FT	20.1	3.41
6 FT	55.8	2.05
Distance From Fixture	Footcandles	Beam Width




12 Watts 3000K 30° (MEDIUM) No Shield 610.9 LUMENS • CBCP 2136 • BUG B1 U0 G0 AURORALIGHT HWM16-LM-12-M-30		
30 FT	2.37	13.6
26 FT	3.16	11.8
22 FT	4.41	9.94
18 FT	6.59	8.14
14 FT	10.9	6.33
10 FT	21.4	4.52
6 FT	59.3	2.71
Distance From Fixture	Footcandles	Beam Width




12 Watts 3000K 40° (WIDE) No Shield 676.8 LUMENS • CBCP 1375 • BUG B1 U0 G0 AURORALIGHT HWM16-LM-12-W-30		
30 FT	1.53	19.7
26 FT	2.03	17.1
22 FT	2.84	14.5
18 FT	4.24	11.8
14 FT	7.01	9.21
10 FT	13.7	6.58
6 FT	38.2	3.95
Distance From Fixture	Footcandles	Beam Width



12 Watts 3000K 50° (WIDE FLOOD) No Shield 668.9 LUMENS • CBCP 985 • BUG B1 U0 G0 AURORALIGHT HWM16-LM-12-WF-30		
30 FT	1.09	23.8
26 FT	1.46	20.6
22 FT	2.04	17.5
18 FT	3.04	14.3
14 FT	5.03	11.1
10 FT	9.85	7.94
6 FT	27.4	4.76
Distance From Fixture	Footcandles	Beam Width



12 Watts 3000K 60° (SUPER FLOOD) No Shield 628 LUMENS • CBCP 621 • BUG B1 U0 G0 AURORALIGHT HWM16-LM-12-SF-30		
30 FT	0.687	30.4
26 FT	0.914	26.3
22 FT	1.28	22.3
18 FT	1.91	18.2
14 FT	3.15	14.2
10 FT	6.18	10.1
6 FT	17.2	6.08
Distance From Fixture	Footcandles	Beam Width



12 Watts 3000K 75° (ULTRA FLOOD) No Shield 506.6 LUMENS • CBCP 416 • BUG B1 U0 G0 AURORALIGHT HWM16-LM-12-UF-30		
30 FT	0.462	34.5
26 FT	0.615	29.9
22 FT	0.859	25.3
18 FT	1.28	20.7
14 FT	2.12	16.1
10 FT	4.16	11.5
6 FT	11.5	6.90
Distance From Fixture	Footcandles	Beam Width

