



## LBD-H HERMOSA

The re-invented **LBD-H Hermosa** bollard features a sleek new look and a serviceable machined Acrylic lens. Re-engineered to take full advantage of the "Designer Series" LED module. With enhanced performance, superior longevity, and ultimate flexibility, the new Hermosa is ready for "center stage." The ALP (Adjustable Light Perimeter) system allows control of the lumen output and radial spread and can be locked in place once set.


### Features include:

- Interchangeable LED Module in 8 or 12 Watts up to 240 Lumens
- 2700K (80 & 90 CRI), 3000K (80 CRI), or 4000K
- Precision Machined, Field Replaceable Acrylic Lens
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver (AC or DC Input)
- Dimmable to <10% (TRIAC/Forward Phase)
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- 120V Option w/ Integral 60W 120-12V Transformer
- Solid Copper and Brass Construction




LBD-H-15-L/P-BLP

LBD-H-24-S/M-BLP

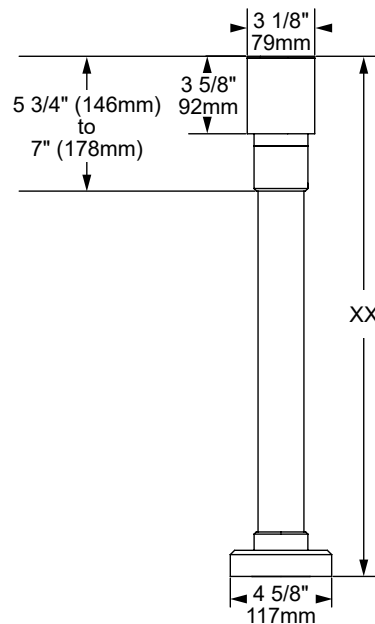

**ADJUSTABLE  
LIGHT PERIMETER**



**COPPER  
CORE  
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



**12V**

**120V**



**SEE NEXT PAGE FOR ORDERING INFORMATION**

## LBD-H HERMOSA



**ORDERING GUIDE:** <sup>Prefix</sup> **LBD-H** L (LED) BD (BOLLARD) H (HERMOSA)

□ INDICATES REQUIRED FIELD

□ INDICATES OPTIONAL FIELD

✓ INCLUDED IN BASE PRICE

[ \_ ] QUICK SPEC (See Below)

**QUICK SPEC SKU** **LBD-H-12-27-24-12-BD-GS-NAT**

LBD-H					
<b>WATTAGE</b> ✓	<b>LED COLOR</b> ✓	<b>HEIGHT</b>	<b>VOLTAGE</b>	<b>ACCESSORIES</b>	
<b>[8]</b> 8 Watts	<b>[27]</b> 2700K, 80 CRI	<b>[15]</b> 15" ✓	<b>[12]</b> 12V ✓	<b>[H]</b> Hex Baffle	
<b>[12]</b> 12 Watts	<b>[279]</b> 2700K, 90CRI	<b>[19]</b> 19"	<b>[120]</b> 120V	<b>[SBH]</b> Stepped Baffle /	
	<b>[30]</b> 3000K, 80 CRI	<b>[24]</b> 24"		Hex Baffle Assembly	
	<b>[40]</b> 4000K, 80 CRI	<b>[30]</b> 30"			

NOTE: For other CCT and CRI options, contact factory



### MOUNT

NO MOUNT:

**[1/2]** 1/2" (NPS) Universal Thread ✓

12V MOUNT OPTIONS:

**[BD-GS]** Ground Stake

**[TR]** 12" Trident Spike

120/12V MOUNT OPTIONS:

**[LP-BD]** Concrete Leveling Pedestal

**[SM-BD]** Surface Mount

### FINISH

STANDARD:

**[NAT]** Natural ✓

PLUS (\$):

**[BLP]** Bronze Living Patina

**[BLP-XD]** BLP Extra Dark

PREMIUM (\$\$\$):

**[NI]** Nickel PVD

**[BG]** Black Gloss PVD

**[BS]** Black Satin PVD

**[BZ]** Bronze PVD

**[BZ-XD]** Dark Bronze PVD

### ACCESSORIES



H



SBH

### MOUNTS



1/2-BD



BD-GS



TR



LP-BD




SM-BD

# LBD-H HERMOSA

## PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit [auroralight.com/product/lbd-h-hermosa/](https://auroralight.com/product/lbd-h-hermosa/)

Mounting Height - 2 Feet

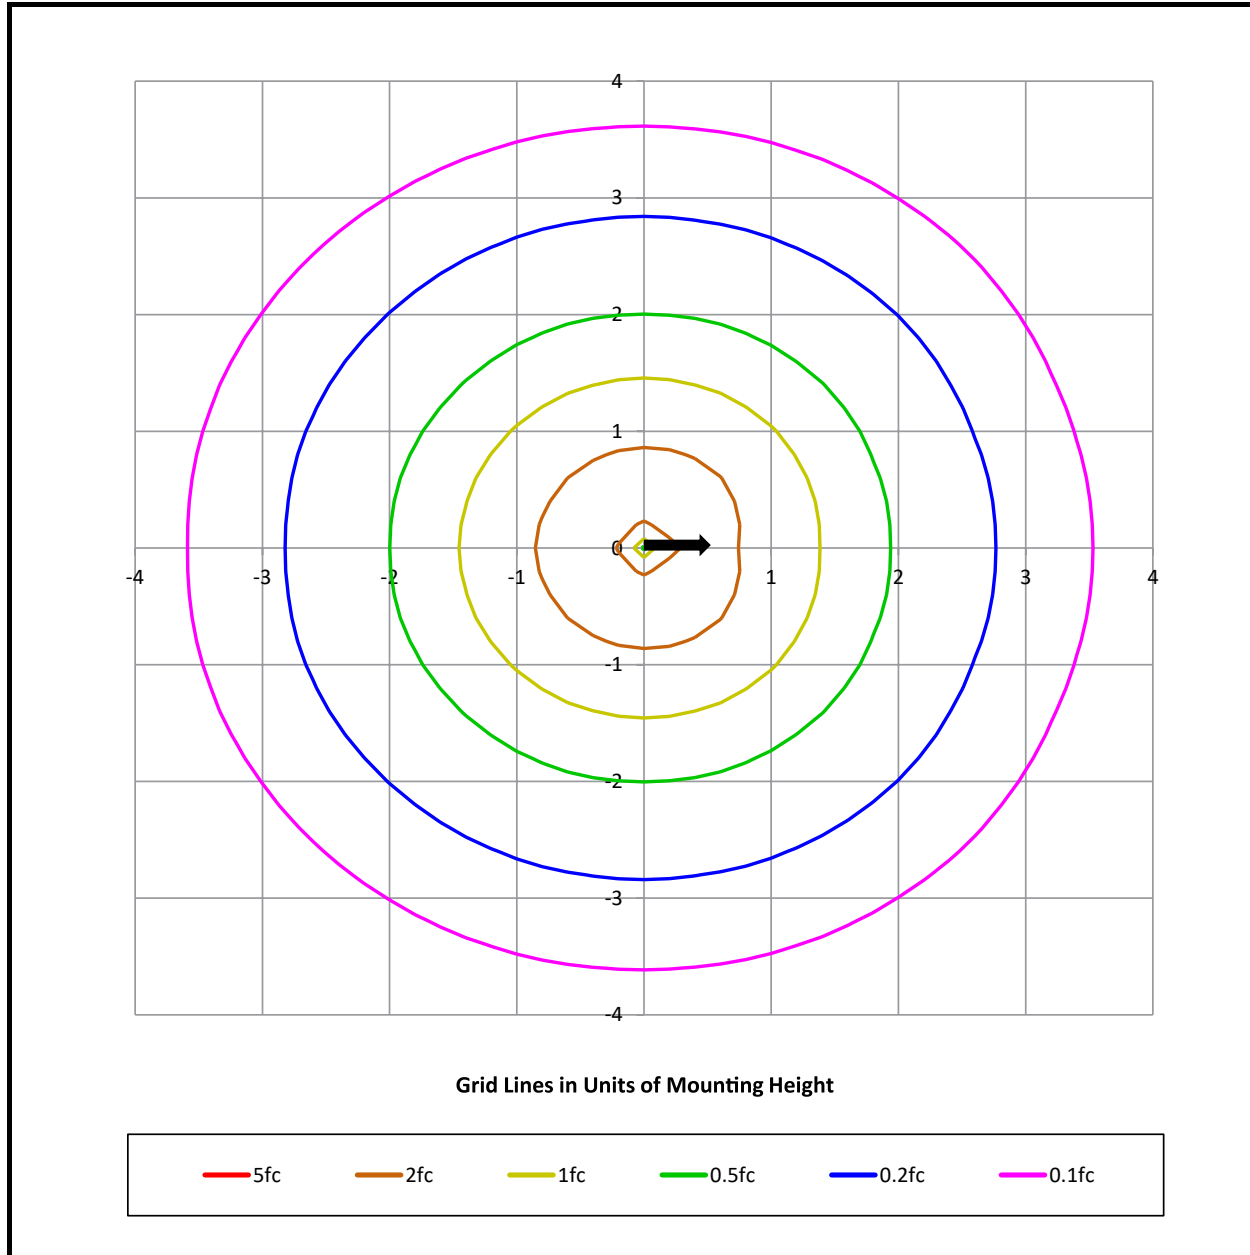

BUG Rating

B0 U3 G1