

## LBD350-S10-GTL DOMUS


The **LBD350** series of LED Bollards are the latest addition to our growing line of innovative and exquisite area light luminaires. This series is available in seven elegant shade designs with three progressive sizes to complement our new series of LML pendants and LWM wall sconces. Our Thermally Integrated® and Field Serviceable LED module provides superior heat dissipation, longer life, and higher performance. Ideal for illuminating large pathways, or driveways, and sprawling outdoor spaces.

**Features include:**

- 10, 15 or 18 Watts
- 2700K (80 & 90 CRI) or 3000K (80 CRI)
- Thermally Integrated® w/ Copper Core Technology®
- 12V or 120V AC Integral Constant Current Driver
- Dimmable to <10% (TRIAC/Forward Phase)
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Copper and Brass Construction




LBD350-S10-GTL-BLP

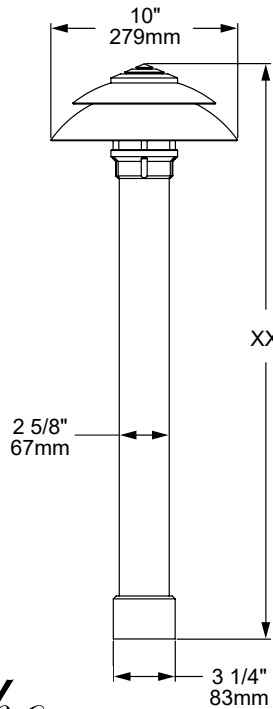


**CORE STYLES**



[GL] Graduated Louvers



[SL] Stacked Louvers



[NL] No Louvers

*The Echo*  
COLLECTION

The Echo Collection™ from Auroralight are configurable and scale-able, Wall Sconce, Pendant and Bollard luminaires. This all-encompassing line of products was designed to complement one another while also providing the level customization everyone has come to expect from Auroralight.

**COPPER CORE TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V

120V



THERMALLY INTEGRATED



**SEE NEXT PAGE FOR ORDERING INFORMATION**

## LBD350-S10-GTL DOMUS



Prefix

**ORDERING GUIDE:** **LBD350-S10-GTL** L (LED) BD (BOLLARD) 350 (SERIES) S (SPHERICAL) 10 (INCHES) GTL (GLIMMER TOP W/ LOUVER)

INDICATES REQUIRED FIELD     INDICATES OPTIONAL FIELD     INCLUDED IN BASE PRICE    [ \_ ] QUICK SPEC (See Below)

**QUICK SPEC SKU**    **LBD350-S10-GTL-GL-15-27-32-12-GS-NAT**

**LBD350-S10-GTL**

**CORE** ✓

- [GL]** Graduated Louvers
- [SL]** Stacked Louvers
- [NL]** No Louvers

**WATTAGE** ✓

- [10]** 10 Watts
- [15]** 15 Watts
- [18]** 18 Watts\*

\*18W can only be used with 120V

**LED COLOR** ✓

- [27]** 2700K, 80 CRI
- [279]** 2700K, 90CRI
- [30]** 3000K, 80 CRI


NOTE: For other CCT and CRI options, contact factory

**HEIGHT**

- [26]** 26" ✓
- [32]** 32"
- [XX]** Specify  
Min: 12" Max: 48"

**VOLTAGE**

- [12]** 12V ✓
- [120]** 120V



**MOUNT**

NO MOUNT:

**[1/2]** 1/2" Male Thread

12V MOUNT OPTIONS:

**[GS]** Ground Stake ✓

**[TR-12]** 12" Trident Spike

120/12V MOUNT OPTIONS:

**[JB3-S]** 3" Junction Box w/ PVC Stake


**[PB-S]** Power Box w/ PVC Stake Incl.

60W 120-12V Trans.

**[PM-60]** Pedestal Mount

**[LP]** Leveling Pedestal

**[SM]** Surface Mount



**FINISH**

STANDARD:

**[NAT]** Natural ✓

PLUS (\$):

**[BLP]** Bronze Living Patina

**[BLP-XD]** BLP Extra Dark

PREMIUM (\$\$\$):

**[NI]** Nickel PVD

**[BG]** Black Gloss PVD

**[BS]** Black Satin PVD

**[BZ]** Bronze PVD

**[BZ-XD]** Dark Bronze PVD

**MOUNTS**




# LBD350-S10-GTL DOMUS

## PHOTOMETRIC OVERVIEW

Information based on 12W & 3000K. To download more in-depth IES photometric data, visit [auroralight.com/product/lbd350-s10-gtl-domus/](http://auroralight.com/product/lbd350-s10-gtl-domus/)

Mounting Height - 3 Feet

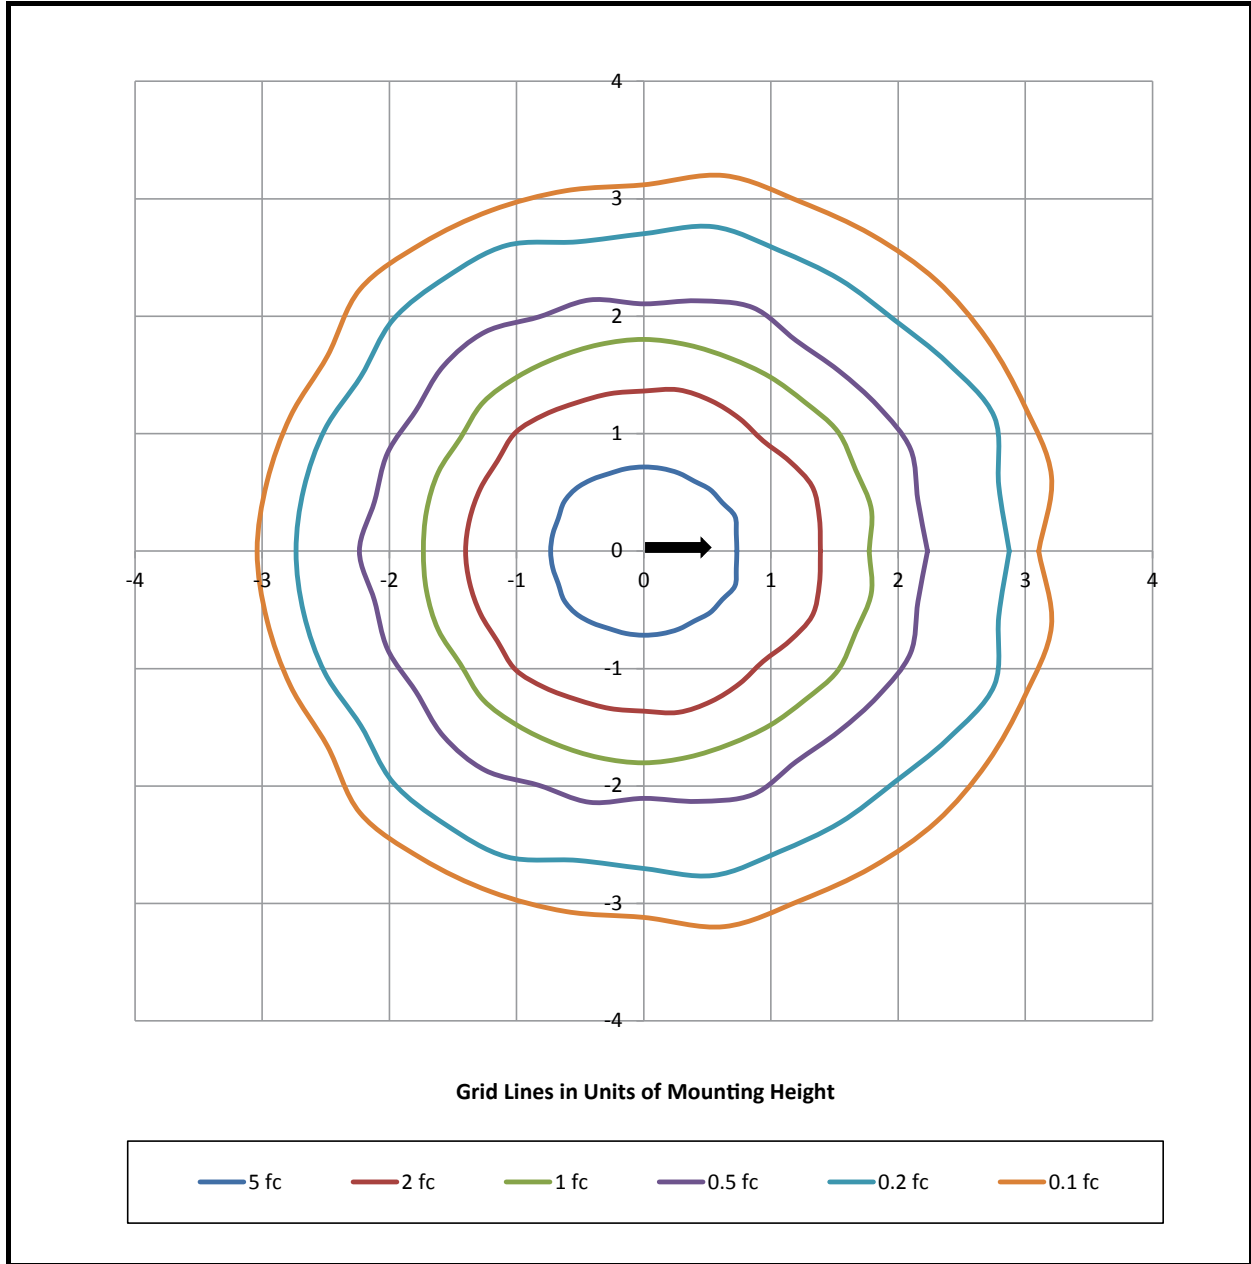

**BUG Rating** B0 U1 G1