

LMG1-90 MAGLIO

The **LMG1-90 Maglio** is a versatile high-quality, high-performance path light. The Maglio features a rotational glare shield, allowing you to seamlessly adjust the aperture from 180° to 0°. Also ideal for wall-washing applications.


Features include:

- 3 Watts up to 200 Lumens
- Cree LED™ XLAMP® (XP-G)
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction




LMG1-90-NG-NAT

LMG1-90-G-NAT

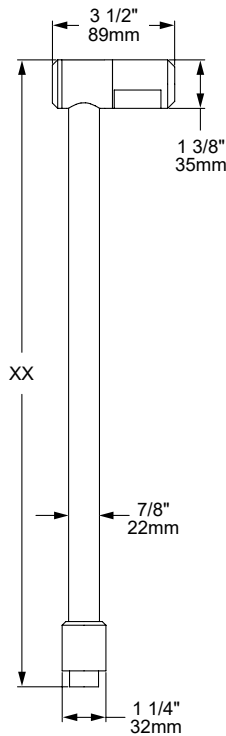

INDEPENDENTLY ADJUSTABLE LIGHT SOURCE & SHIELD

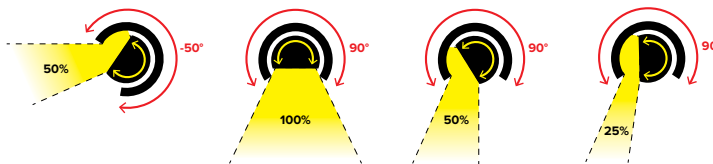

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



SEE NEXT PAGE FOR ORDERING INFORMATION

LMG1-90 MAGLIO




ORDERING GUIDE: ^{Prefix} **LMG1-90** L (LED) MG (MAGLIO) 1 (SERIES) 90 (STYLE)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LMG1-90-NG-27-18-2GS-NAT**

LMG1-90					
BODY <input checked="" type="checkbox"/>	LED COLOR <input checked="" type="checkbox"/>	HEIGHT <input checked="" type="checkbox"/>	MOUNT	FINISH	
[G] Grooves [NG] No Grooves	[27] 2700K, 80CRI [279] 2700K, 90CRI [30] 3000K, 80CRI [45] 4500K, 80CRI [AMB] Amber (585-595nm) NOTE: For other CCT and CRI options, contact factory	[12] 12" <input checked="" type="checkbox"/> [18] 18" [22] 22" [XX] Specify	NO MOUNT: [1/2] 1/2" Male Thread GROUND: [2GS] Ground Stake w 2" Cap <input checked="" type="checkbox"/> [3GS] Ground Stake w 3" Cap [325GS] Ground Stake w 3 1/4" Cap [DS] Deluxe Spike 9" [TR-12] Trident Spike [JB3-S] 3" J-Box w/ Stake [PB-S] Power Box w/ Stake (Inc. 60W 120-12V trans.) [PM-60] 4" Pedestal Mount SURFACE: [SM2] 2 1/4" Surface Mount [SM3] 3 1/4" Surface Mount	STANDARD: [NAT] Natural <input checked="" type="checkbox"/> PLUS (\$): [BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark PREMIUM (\$\$\$): [NI] Nickel PVD [BG] Black Gloss PVD [BS] Black Satin PVD [BZ] Bronze PVD [BZ-XD] Dark Bronze PVD	

MOUNTS

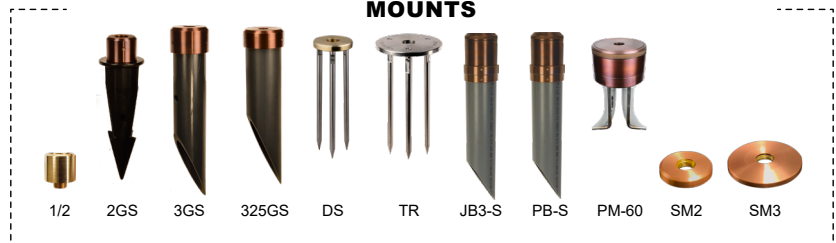


LMG1-90 MAGLIO

PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/lmg1-90-maglio/

Mounting Height - 2 Feet

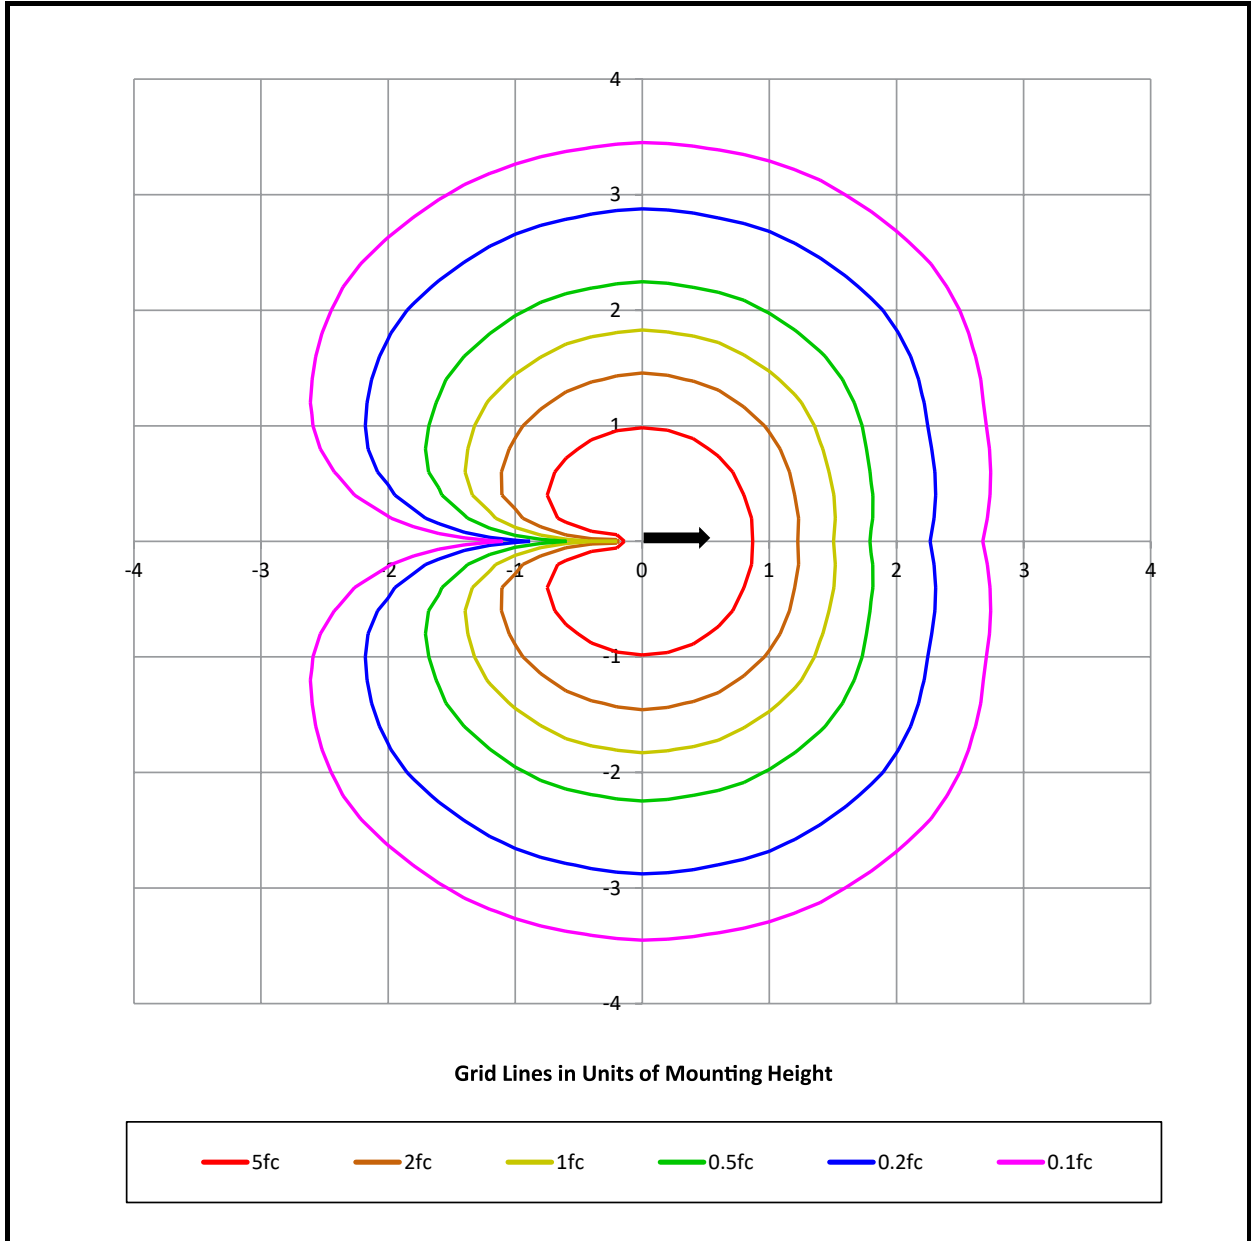

BUG Rating B0 U1 G0