


## LMG1-AF MAGLIO

The **LMG1-AF Maglio** is a stunning addition to our line of Estate Quality, high performance LED path lights. Featuring a rotational glare shield with an independently rotating light engine allowing the Maglio to have a seamlessly adjustable aperture from 180° down to 0°, or to aim up, down or anywhere in between. Uniquely configurable, it is well suited to path lighting, wall washing, or up lighting.


Features include:

- 3 Watts up to 211 Lumens
- Cree LED™ XLAMP® (XP-G)
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Recommended Spacing 10–18' O.C.
- Solid Copper and Brass Construction

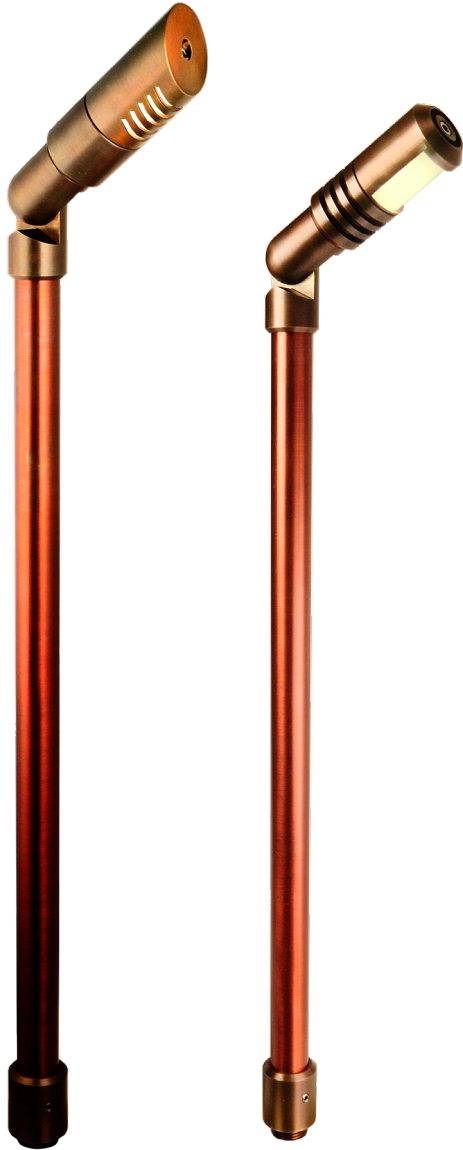


LMG1-AF-AL-NG-BLP

LMG1-AF-NL-G-BLP

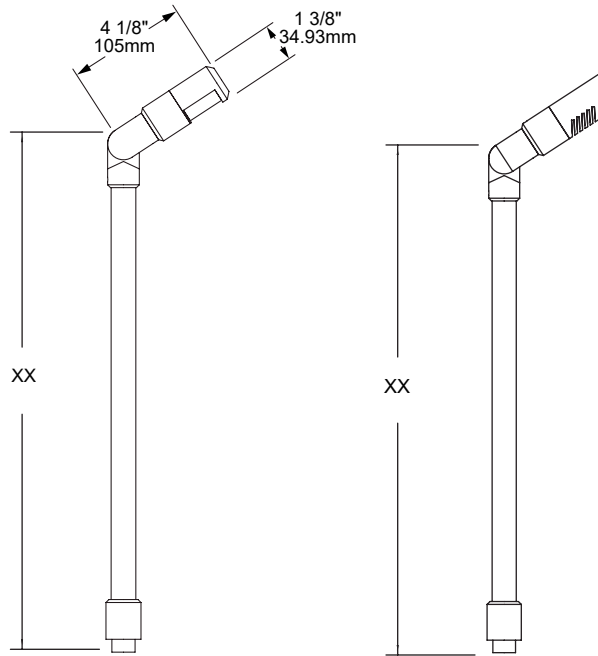

**INDEPENDENTLY ADJUSTABLE  
LIGHT SOURCE & SHIELD**

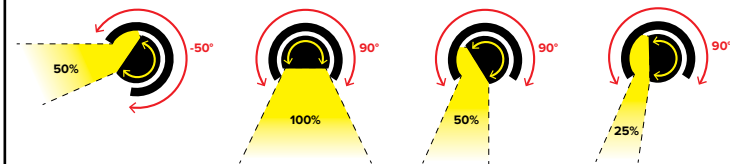

**COPPER  
CORE  
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



**SEE NEXT PAGE FOR ORDERING INFORMATION**

## LMG1-AF MAGLIO



Prefix


**ORDERING GUIDE:** **LMG1-AF** L (LED) MG (MAGLIO) 1 (SERIES) AF (ADJUSTABLE FITTING)

INDICATES REQUIRED FIELD     INDICATES OPTIONAL FIELD     INCLUDED IN BASE PRICE    [ \_ ] QUICK SPEC (See Below)

**QUICK SPEC SKU**    **LMG1-AF-NL-NG-27-18-2GS-NAT**

<b>LMG1-AF</b>				
	<b>LOUVERS</b> <input checked="" type="checkbox"/>	<b>BODY</b> <input checked="" type="checkbox"/>	<b>LED COLOR</b> <input checked="" type="checkbox"/>	<b>HEIGHT</b> <input checked="" type="checkbox"/>
	<b>[NL]</b> No Louvers <b>[SL]</b> Straight Louvers <b>[AL]</b> Angled Louvers	<b>[G]</b> Grooves <input checked="" type="checkbox"/> <b>[NG]</b> No Grooves	<b>[27]</b> 2700K, 80CRI <input checked="" type="checkbox"/> <b>[279]</b> 2700K, 90CRI <b>[30]</b> 3000K, 80CRI <b>[45]</b> 4500K, 80CRI <b>[AMB]</b> Amber (585-595nm)	<b>[12]</b> 12" <input checked="" type="checkbox"/> <b>[18]</b> 18" <b>[22]</b> 22" <b>[XX]</b> Specify
NOTE: For other CCT and CRI options, contact factory				

<b>MOUNT</b>	<b>FINISH</b>
NO MOUNT: <b>[1/2]</b> 1/2" Male Thread	STANDARD: <b>[NAT]</b> Natural <input checked="" type="checkbox"/>
GROUND: <b>[2GS]</b> Ground Stake w 2" Cap <input checked="" type="checkbox"/> <b>[3GS]</b> Ground Stake w 3" Cap <b>[325GS]</b> Ground Stake w 3 1/4" Cap <b>[DS]</b> Deluxe Spike 9" <b>[TR-12]</b> Trident Spike <b>[JB3-S]</b> 3" J-Box w/ Stake <b>[PB-S]</b> Power Box w/ Stake (Inc. 60W 120-12V trans.) <b>[PM-60]</b> 4" Pedestal Mount	PLUS (\$): <b>[BLP]</b> Bronze Living Patina <b>[BLP-XD]</b> BLP Extra Dark PREMIUM (\$\$\$): <b>[NI]</b> Nickel PVD <b>[BG]</b> Black Gloss PVD <b>[BS]</b> Black Satin PVD <b>[BZ]</b> Bronze PVD <b>[BZ-XD]</b> Dark Bronze PVD
SURFACE: <b>[SM2]</b> 2 1/4" Surface Mount <b>[SM3]</b> 3 1/4" Surface Mount	

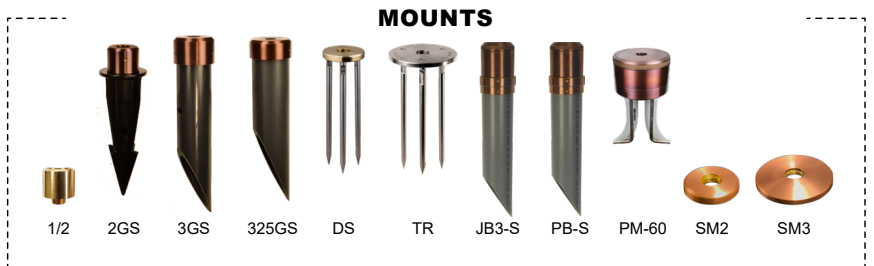


# LMG1-AF MAGLIO

## PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit [auroralight.com/product/lmg1-af-maglio/](http://auroralight.com/product/lmg1-af-maglio/)

Mounting Height - 2 Feet

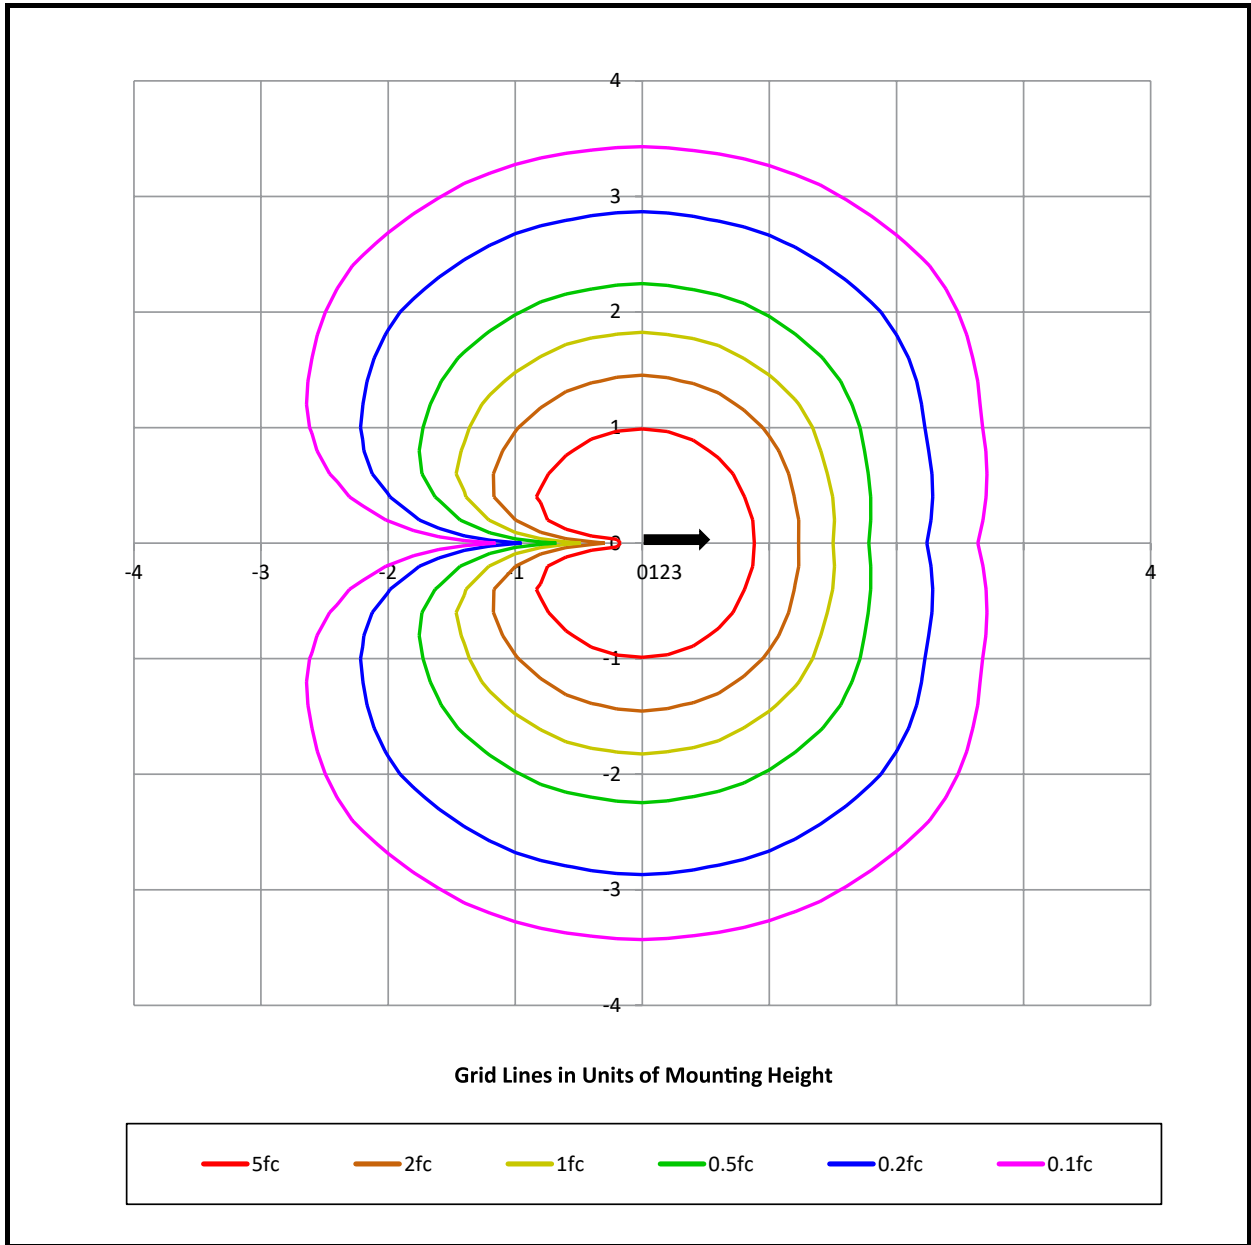

**BUG Rating**    B0 U1 G0