



LMG3 MAGLIO




LMG3-NG-NAT

LMG3-G-NAT


The **LMG3 Maglio** is among the most versatile in our line of high-quality, high-performance path lights. It features a rotational glare shield with an independently rotating light engine. The counter-rotation allows for a seamlessly adjustable aperture from 180° down to 0°. Additionally, the light has a full 360 degrees of verticle adjustability, making it ideal for either pathway or wall washing applications.

Features include:

- 4 Watts up to 304 Lumens
- Cree LED™ XLAMP® (XPL)
- 2700K (80 CRI), 3000K (80 CRI), or 4000K (80 CRI)
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

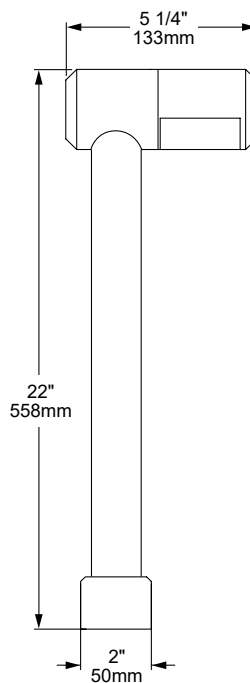

INDEPENDENTLY ADJUSTABLE LIGHT SOURCE & SHIELD

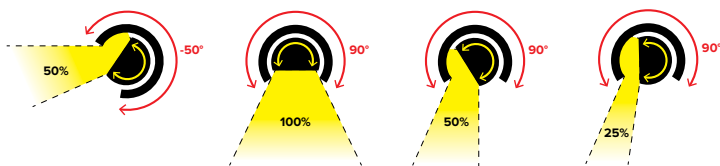

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



SEE NEXT PAGE FOR ORDERING INFORMATION




ORDERING GUIDE: ^{Prefix} **LMG3** L (LED) MG (MAGLIO) 3 (SERIES)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LMG3-NG-27-2GS-NAT**

LMG3				
	BODY ✓	LED COLOR ✓	MOUNT	FINISH
	[G] Grooves	[27] 2700K, 80CRI	NO MOUNT:	STANDARD:
	[NG] No Grooves	[30] 3000K, 80CRI	[1/2] 1/2" Male Thread	[NAT] Natural ✓
		[40] 4000K, 80CRI	GROUND:	PLUS (\$):
		NOTE: For other CCT and CRI options, contact factory	[2GS] Ground Stake w 2" Cap ✓	[BLP] Bronze Living Patina
			[3GS] Ground Stake w 3" Cap	[BLP-XD] BLP Extra Dark
			[325GS] Ground Stake w 3 1/4" Cap	PREMIUM (\$\$\$):
			[DS] Deluxe Spike 9"	[NI] Nickel PVD
			[TR-12] Trident Spike	[BG] Black Gloss PVD
			[JB3-S] 3" J-Box w/ Stake	[BS] Black Satin PVD
			[PB-S] Power Box w/ Stake (Inc. 60W 120-12V trans.)	[BZ] Bronze PVD
			[PM-60] 4" Pedestal Mount	[BZ-XD] Dark Bronze PVD
			SURFACE:	
			[SM2] 2 1/4" Surface Mount	
			[SM3] 3 1/4" Surface Mount	


MOUNTS

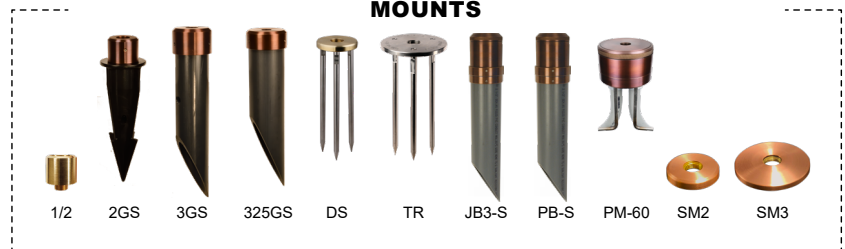

PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lmg3-maglio/

Mounting Height - 2 Feet

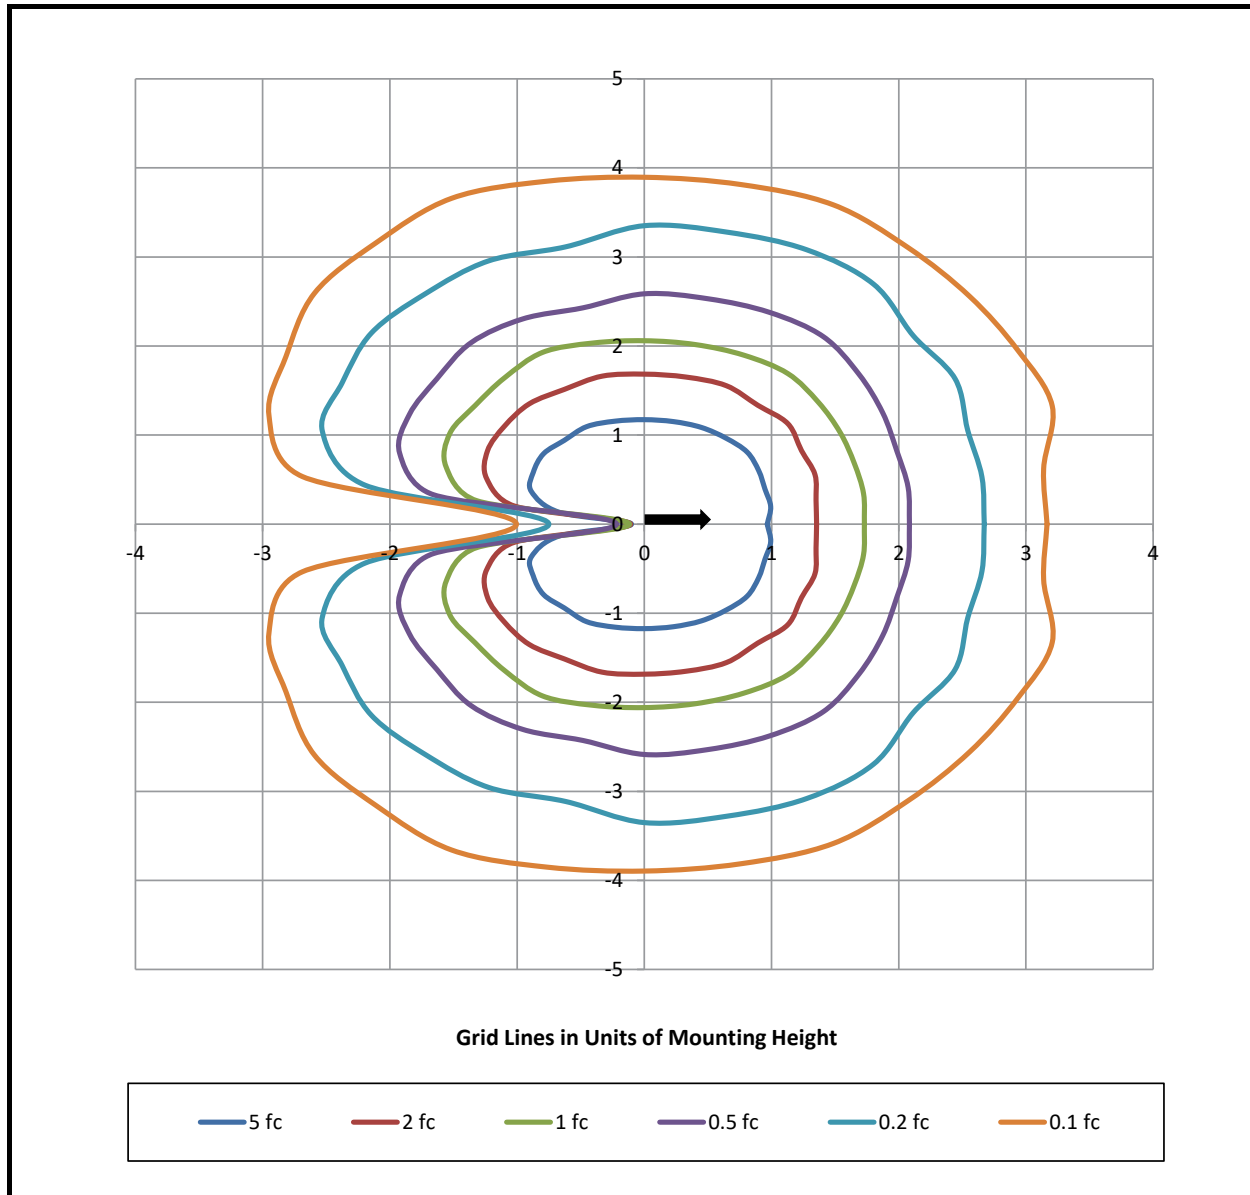

BUG Rating

B0 U1 G0