



LML250-C8 ARTEMIS


The **LML250** Moonlighter series of LED pendant luminaires is the latest addition to our growing line of innovative and exquisite down lighting. This series is available in three elegant shade designs with three progressive sizes intended to complement our new state-of-the-art LBD Bollard series and LWM series wall sconces. This estate-quality luminaire is ideal for creating ambient mood lighting in intimate outdoor spaces.

Features include:

- 8 Watts up to 205 Lumens
- Cree LED™ XLAMP® Extreme High Power (XHP)
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction



LML250-C8-BLP

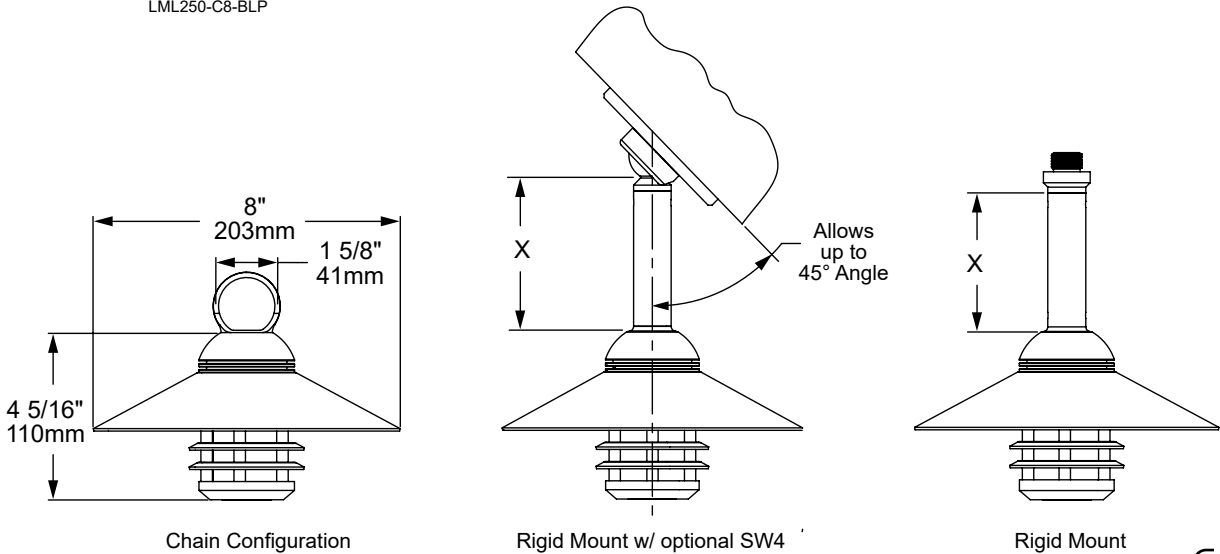

Chain Configuration

Rigid Mount w/ optional SW4

Rigid Mount

The Echo COLLECTION

The Echo Collection™ from Auroralight are configurable and scale-able, Wall Sconce, Pendant and Bollard luminaires. This all-encompassing line of products was designed to complement one another while also providing the level customization everyone has come to expect from Auroralight.

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



THERMALLY INTEGRATED



POWERED



SEE NEXT PAGE FOR ORDERING INFORMATION



LML250-C8 ARTEMIS




ORDERING GUIDE: ^{Prefix} **LML250-C8** L (LED) ML (MOONLIGHTER) 250 (SERIES) C (CONICAL) 8 (INCHES)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LML250-C8-27-C18-SB-NAT**

LML250-C8				
<p>LED COLOR ✓</p> <p>[27] 2700K, 80 CRI</p> <p>[30] 3000K, 80 CRI</p> <p>NOTE: For other CCT and CRI options, contact factory</p>	<p>MOUNT</p> <p>[C18] 18" Solid Brass Chain ✓</p> <p>[C36] 36" Solid Brass Chain</p> <p>[RM-X] Rigid Mount (Specify 4, 6, 8 or 10")</p> <p>[X] = Specify Length</p> <p>Note: For custom lengths of chain or cord, contact factory. 1/2" (NPS) Universal Threaded Loop will be included with chain</p>	<p>CANOPY OPTIONS</p> <p>NO CANOPY:</p> <p>[NC] No Canopy ✓</p> <p>CANOPY:</p> <p>[SB] 2 1/2" Brass Splice Box (Only Compatible with Chain)</p> <p>[CP4] 4" Cover Plate</p> <p>[CP45] 4 1/2" Cover Plate</p> <p>[PC60] 4 1/2" Power Canopy (Inc. 60W 120-12V trans.)</p> <p>SWIVEL CANOPY (RM ONLY):</p> <p>[SW4] 4" Swivel Cover Plate</p> <p>[PC60-SW4] Power Canopy w/ Swivel (Inc. 60W 120-12V trans.)</p> <p>Add -C (for Copper) or -B (for Brass) to canopy part numbers above for Escutcheon Material.</p>	<p>FINISH</p> <p>STANDARD:</p> <p>[NAT] Natural ✓</p> <p>PLUS (\$):</p> <p>[BLP] Bronze Living Patina</p> <p>[BLP-XD] BLP Extra Dark</p> <p>PREMIUM (\$\$\$):</p> <p>[NI] Nickel PVD</p> <p>[BG] Black Gloss PVD</p> <p>[BS] Black Satin PVD</p> <p>[BZ] Bronze PVD</p> <p>[BZ-XD] Dark Bronze PVD</p>	

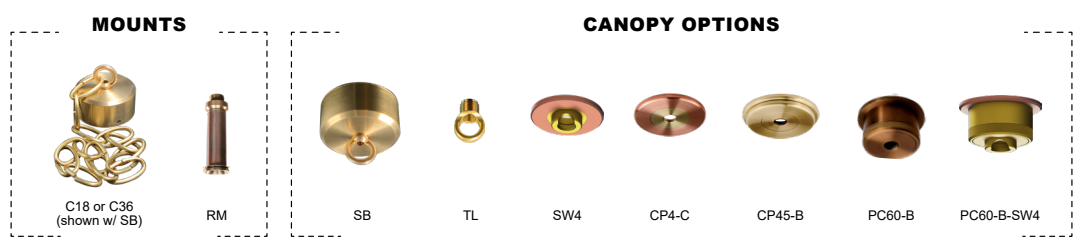


LML250-C8 ARTEMIS

PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lml250-c8-artemis/

Mounting Height - 8 Feet

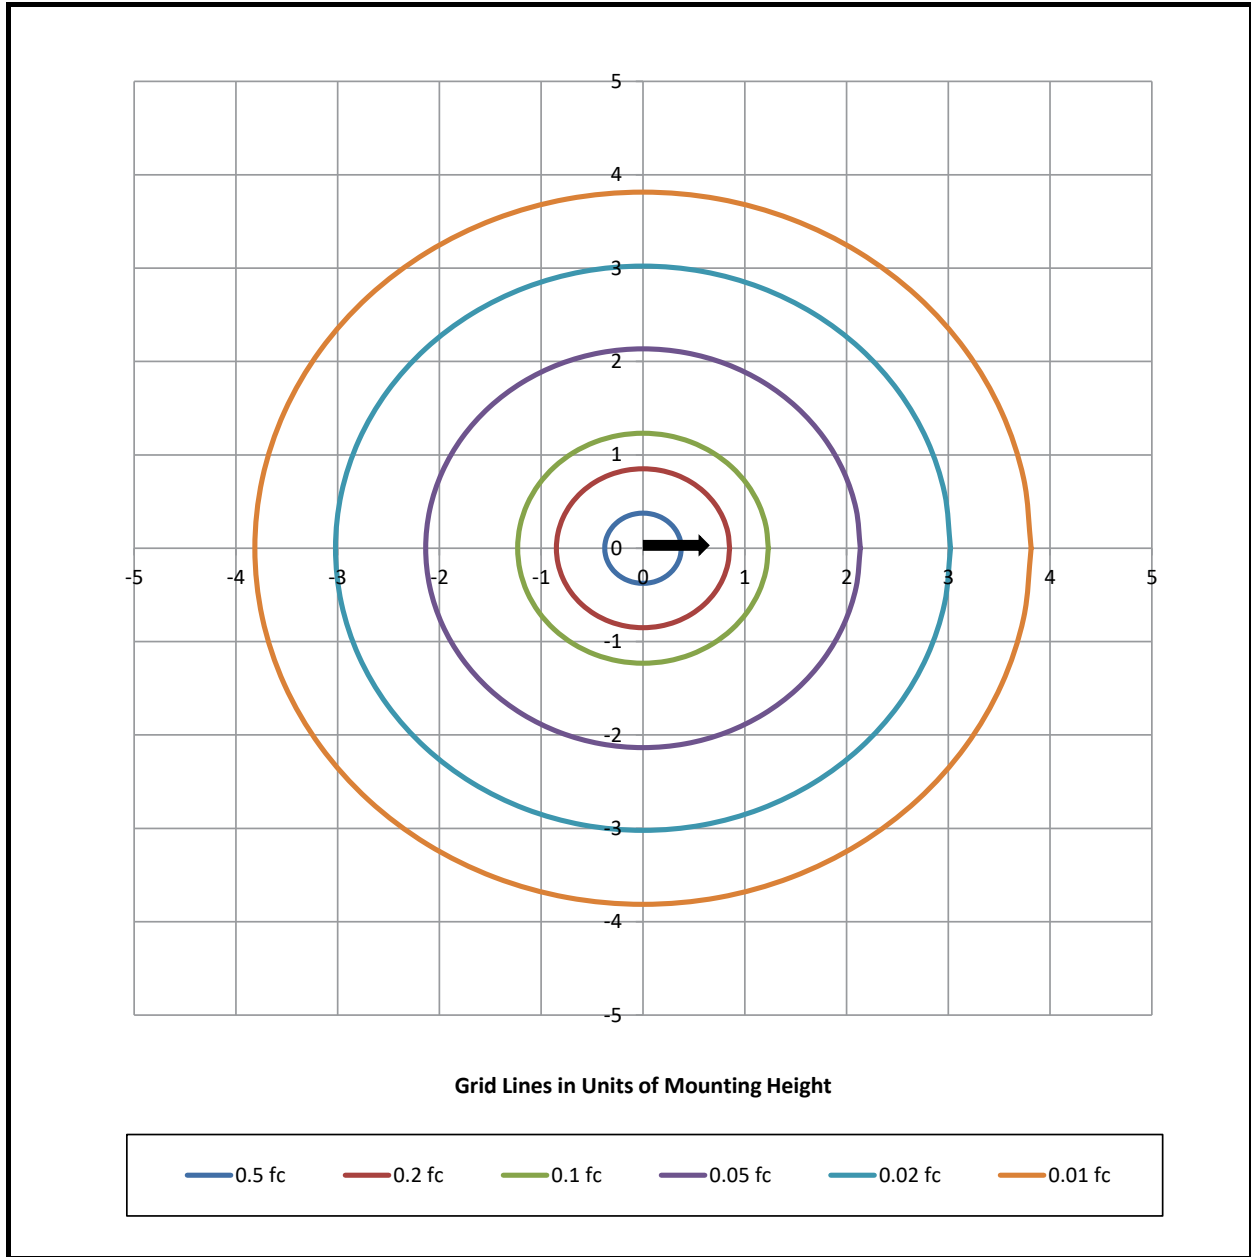

BUG Rating B0 U1 G0