



LML250-C8-GTL CYRANOS


The **LML250** Moonlighter series of LED pendants are a welcome addition to our growing line of innovative and exquisite downlights. This series is available in three elegant shade designs with two progressive sizes, the LML250, and the larger LML350. Both are complementary to our popular LBD Bollard series and LWM series wall sconces. This estate-quality luminaire is ideal for creating ambient mood lighting in intimate spaces or task lighting over counters and bartops.

Features include:


- 8 Watts up to 192 Lumens
- Cree LED™ XLAMP® Extreme High Power (XHP)
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction




LML250-C8-GTL-BLP

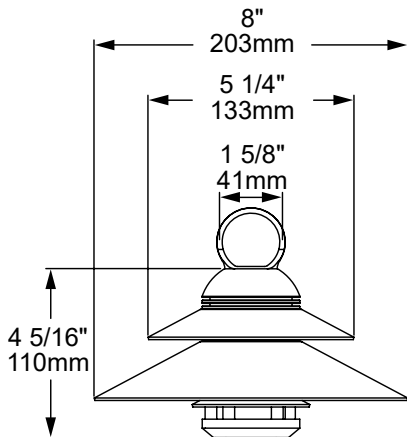

Chain Configuration

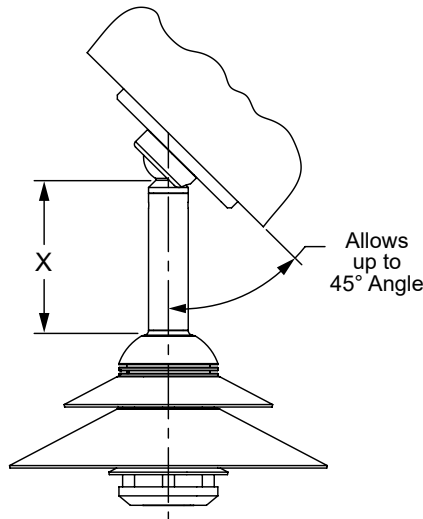

Rigid Mount w/ optional SW4

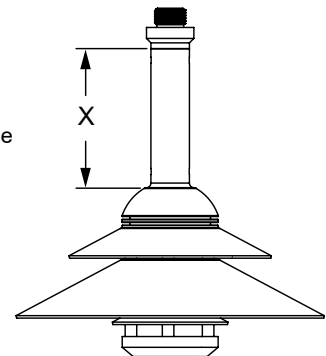

Rigid Mount

The Echo
COLLECTION

The Echo Collection™ from Auroralight are configurable and scale-able, Wall Sconce, Pendant and Bollard luminaires. This all-encompassing line of products was designed to complement one another while also providing the level customization everyone has come to expect from Auroralight.

**COPPER
CORE
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



THERMALLY
INTEGRATED



CREE
LED
POWERED



ida
DARK SKY APPROVED



IP67

SEE NEXT PAGE FOR ORDERING INFORMATION



LML250-C8-GTL CYRANOS

ORDERING GUIDE: **LML250-C8-GTL** Prefix L (LED) ML (MOONLIGHTER) 250 (SERIES) C (CONICAL) 8 (INCHES) GTL (GLIMMER TOP W/ LOUVER)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LML250-C8-GTL-27-C18-SB-NAT**

LML250-C8

LED COLOR ✓

[27] 2700K, 80 CRI

[30] 3000K, 80 CRI

NOTE: For other CCT and CRI options, contact factory

MOUNT

[C18] 18" Solid Brass Chain ✓

[C36] 36" Solid Brass Chain

[RM-X] Rigid Mount (Specify **4, 6, 8** or **10"**)

[X] = Specify Length

Note: For custom lengths of chain or cord, contact factory. 1/2" (NPS) Universal Threaded Loop will be included with chain

CANOPY OPTIONS

NO CANOPY:

[NC] No Canopy ✓

CANOPY:

[SB] 2 1/2" Brass Splice Box (Only Compatible with Chain)

[CP4] 4" Cover Plate

[CP45] 4 1/2" Cover Plate

[PC60] 4 1/2" Power Canopy (Inc. 60W 120-12V trans.)

SWIVEL CANOPY (RM ONLY):

[SW4] 4" Swivel Cover Plate

[PC60-SW4] Power Canopy w/ Swivel (Inc. 60W 120-12V trans.)

FINISH

STANDARD:

[NAT] Natural ✓

PLUS (\$):

[BLP] Bronze Living Patina

[BLP-XD] BLP Extra Dark

PREMIUM (\$\$\$):

[NI] Nickel PVD

[BG] Black Gloss PVD

[BS] Black Satin PVD

[BZ] Bronze PVD

[BZ-XD] Dark Bronze PVD

Add **-C** (for Copper) or **-B** (for Brass) to canopy part numbers above for Escutcheon Material.

MOUNTS



C18 or C36 (shown w/ SB)



RM



SB



TL



SW4



CP4-C



CP45-B



PC60-B



PC60-B-SW4


CANOPY OPTIONS

LML250-C8-GTL CYRANOS

PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lml250-c8-artemis/

Mounting Height - 8 Feet

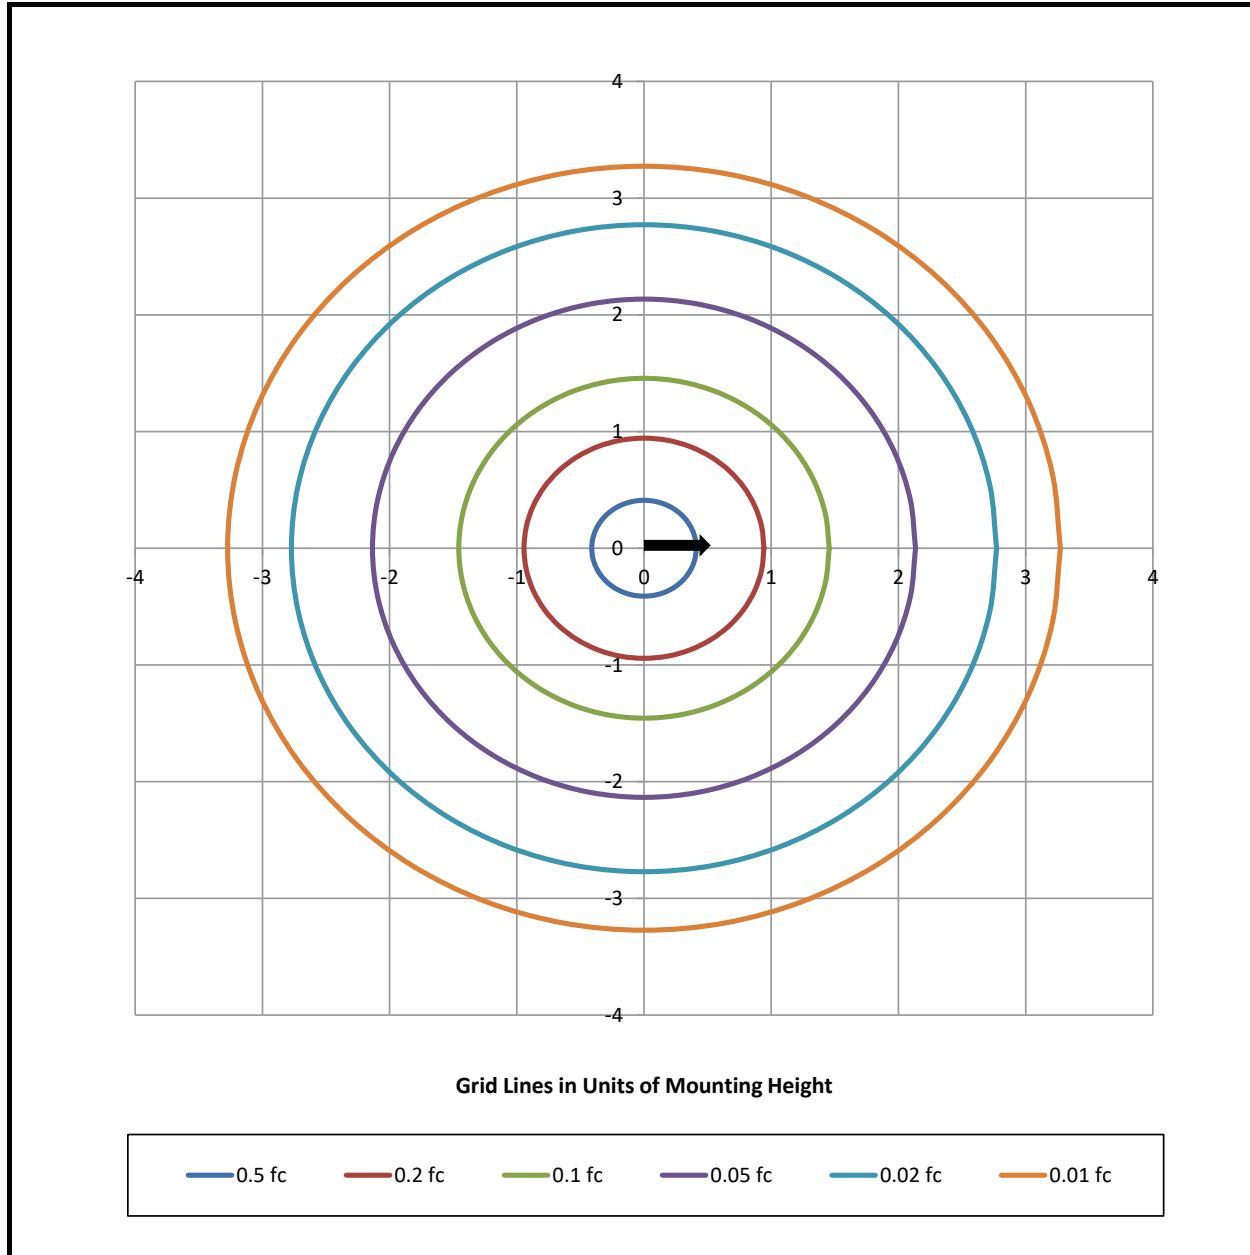

BUG Rating

B0 U1 G0