




LMPL-3-BLP

The **LMPL Martillo** Path Light is a stylistic LED luminaire featuring a sleek, precisely sculpted brass body and stem. A Cree® powered Copper Core® light engine and precision-machined optics combine to create dazzling glare-free illumination. Incomparable engineering, materials, and innovation put the LMPL in a class of its own. Influenced by current architecture, the Martillo is the perfect complement to modern, contemporary, or craftsman architectural stylings.

Features include:

- Field Serviceable LED Module in 3, 4 or 6 Watts, up to 248 Lumens
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver (Remote 12V AC/DC Transformer Required)
- Dimmable to <10% (TRIAC/Forward Phase) via compatible transformer
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Brass Construction
- Contact Factory for Custom Height

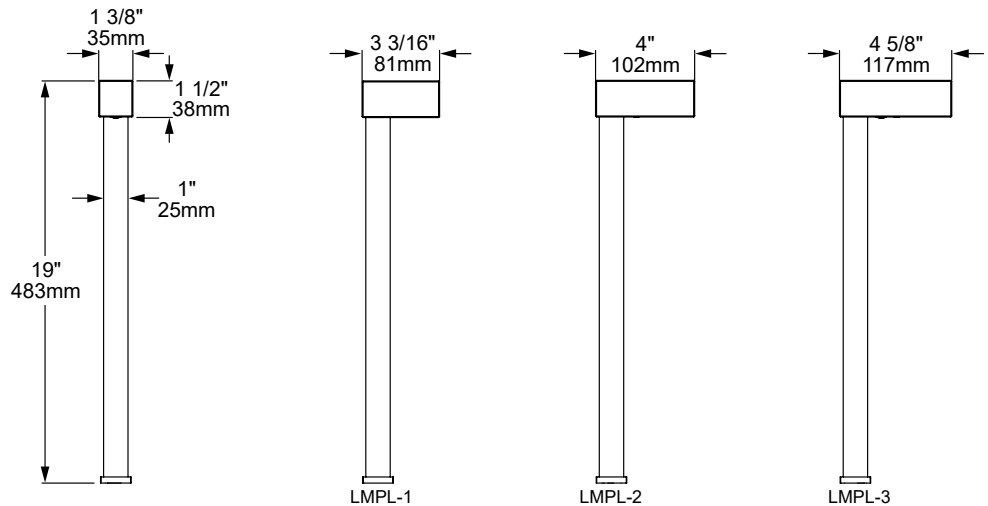

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.

SEE NEXT PAGE FOR ORDERING INFORMATION



LMPL MARTILLO




Prefix

ORDERING GUIDE: **LMPL** L (LED) M (MARTILLO) PL (PATH LIGHT)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LMPL-2-27-2GS-NAT**

LMPL				
<p>LIGHT SOURCE</p> <p>[1] Single LED/Optic (3 Watts) ✓ [2] Double LED/Optic (4 Watts) [3] Triple LED/Optic (6 Watts)</p>	<p>LED COLOR ✓</p> <p>[27] 2700K, 80 CRI [279] 2700K, 90CRI [30] 3000K, 80 CRI [45] 4500K, 80 CRI [AMB] Amber (585-595nm)</p> <p>NOTE: For other CCT and CRI options, contact factory. CCT 3000K or less required for Dark Sky compliance.</p>	<p>MOUNT</p> <p>NO MOUNT:</p> <p>[1/2] 1/2" Male Thread</p> <p>GROUND:</p> <p>[2GS] Ground Stake w 2" Cap ✓ [3GS] Ground Stake w 3" Cap [325GS] Ground Stake w 3 1/4" Cap [DS] Deluxe Spike 9" [TR-12] Trident Spike [JB3-S] 3" J-Box w/ Stake [PB-S] Power Box w/ Stake (Inc. 60W 120-12V trans.) [PM-60] 4" Pedestal Mount</p> <p>SURFACE:</p> <p>[SM2] 2 1/4" Surface Mount [SM3] 3 1/4" Surface Mount</p>	<p>FINISH</p> <p>STANDARD:</p> <p>[NAT] Natural ✓</p> <p>PLUS (\$):</p> <p>[BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark</p> <p>PREMIUM (\$\$\$):</p> <p>[NI] Nickel PVD [PVD] PVD Color (Contact Factory for Color Options)</p>	

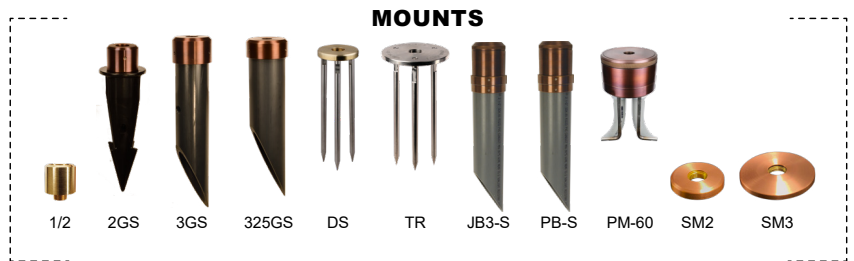


LMPL MARTILLO

PHOTOMETRIC OVERVIEW


Information based on 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lmpl-martillo/

Mounting Height - 2 Feet

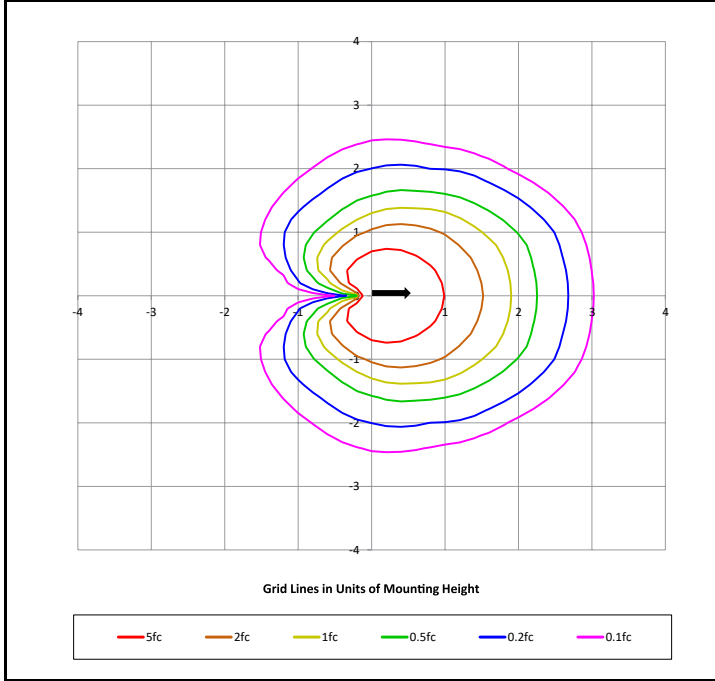


LMPL-1-30

Mounting Height - 2 Feet

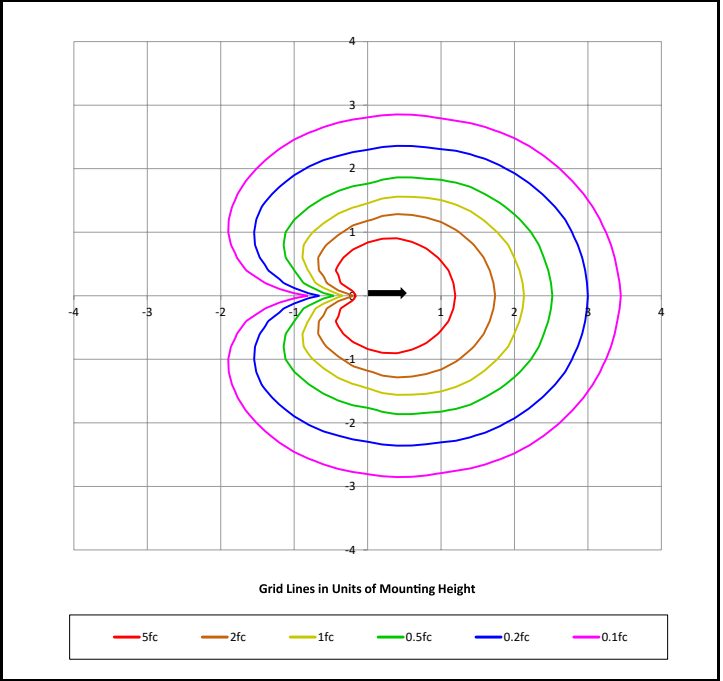

LMPL-2-30

Mounting Height - 2 Feet

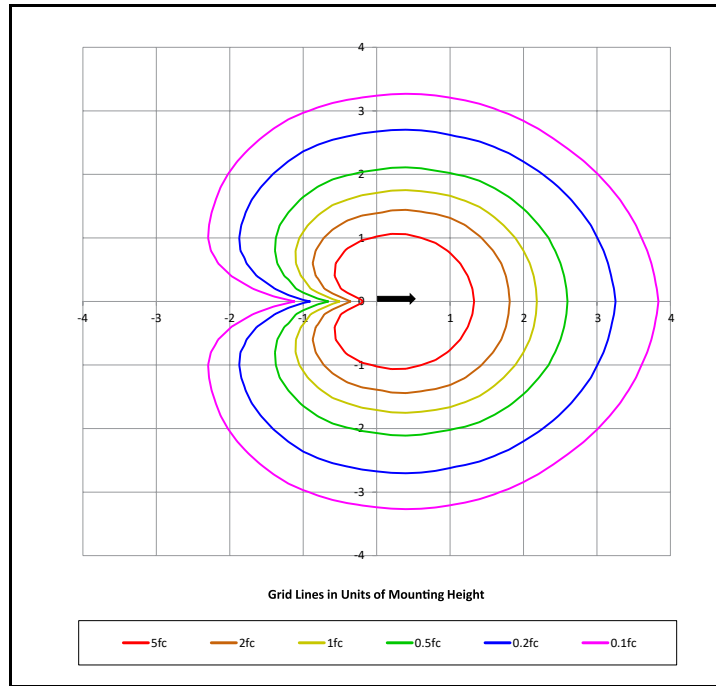

LMPL-3-30

BUG Rating

B0 U1 G0

