





LPL6-BLP

Auroralight's **LPL6 La Jolla** is a stunning new entry into the exclusive "Founders Collection." catalog of exquisite Exterior luminaires. The incomparable LPL6 La Jolla features a bold, robust frame, strikingly good looks, stellar glare-free performance, and a Copper louver with precision-machined optics. Use adjacent to paved areas or in planters at the lawns edge. Exclusively from Auroralight.

Features include:

- 6 Watts, up to 211 Lumens
- Cree LED™ XP-L® High Density
- Precision Machined Acrylic Optic
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver AC or DC Input
- Dimmable to <10% (TRIAC/Forward Phase)
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

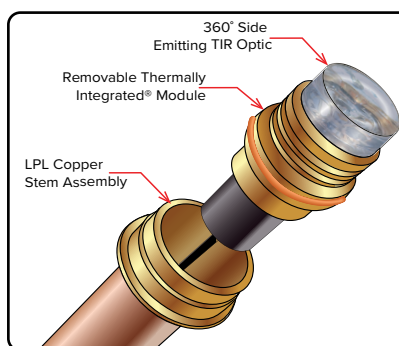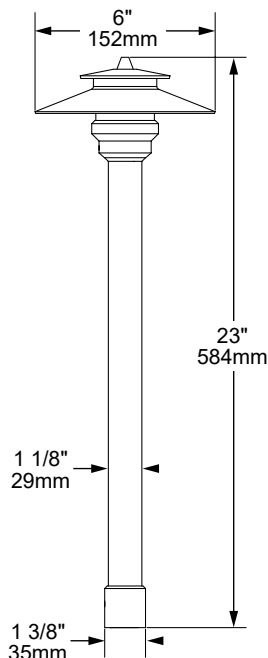

**COPPER
CORE
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



THERMALLY
INTEGRATED



POWERED



SEE NEXT PAGE FOR ORDERING INFORMATION



TYPE:

CAT. #: LPL6-

LPL6 LA JOLLA


ORDERING GUIDE: ^{Prefix} **LPL6** L (LED) PL (PATH LIGHT) 6 (INCHES)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU LPL6-27-2GS-NAT

<div>LPL6</div>	<div></div>	<div></div>	<div></div>	<div></div>
<div><div>LED COLOR </div><div><div>[27]</div> 2700K, 80CRI</div><div><div>[279]</div> 2700K, 90CRI</div><div><div>[30]</div> 3000K, 80CRI</div><div><div>[45]</div> 4500K, 80 CRI</div><div><div>[AMB]</div> Amber</div><div>(585-595nm)</div><div><div>NOTE: For other CCT and CRI options, contact factory. CCT 3000K or less required for Dark Sky compliance.</div></div></div>	<div><div>ACCESSORIES</div><div><div>[180]</div> 180° Shield</div></div>	<div><div>MOUNT</div><div>NO MOUNT:</div><div><div>[1/2]</div> 1/2" Male Thread</div><div>GROUND:</div><div><div>[2GS]</div> Ground Stake w 2" Cap </div><div><div>[3GS]</div> Ground Stake w 3" Cap</div><div><div>[325GS]</div> Ground Stake w 3 1/4" Cap</div><div><div>[DS]</div> Deluxe Spike 9"</div><div><div>[TR-12]</div> Trident Spike</div><div><div>[JB3-S]</div> 3" J-Box w/ Stake</div><div><div>[PB-S]</div> Power Box w/ Stake (Inc. 60W 120-12V trans.)</div><div><div>[PM-60]</div> 4" Pedestal Mount</div><div>SURFACE:</div><div><div>[SM2]</div> 2 1/4" Surface Mount</div><div><div>[SM3]</div> 3 1/4" Surface Mount</div></div>	<div><div>FINISH</div><div>STANDARD:</div><div><div>[NAT]</div> Natural </div><div>PLUS (\$):</div><div><div>[BLP]</div> Bronze Living Patina</div><div><div>[BLP-XD]</div> BLP Extra Dark</div><div>PREMIUM (\$\$\$):</div><div><div>[NI]</div> Nickel PVD</div><div><div>[BG]</div> Black Gloss PVD</div><div><div>[BS]</div> Black Satin PVD</div><div><div>[BZ]</div> Bronze PVD</div><div><div>[BZ-XD]</div> Dark Bronze PVD</div></div>	


MOUNTS

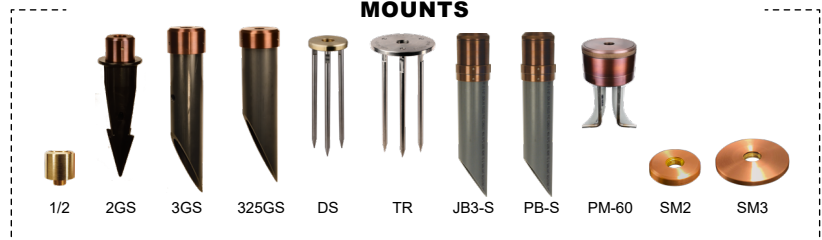

PHOTOMETRIC OVERVIEW

Information based on 6 Watts and 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lpl6-la-jolla/

Mounting Height - 2 Feet

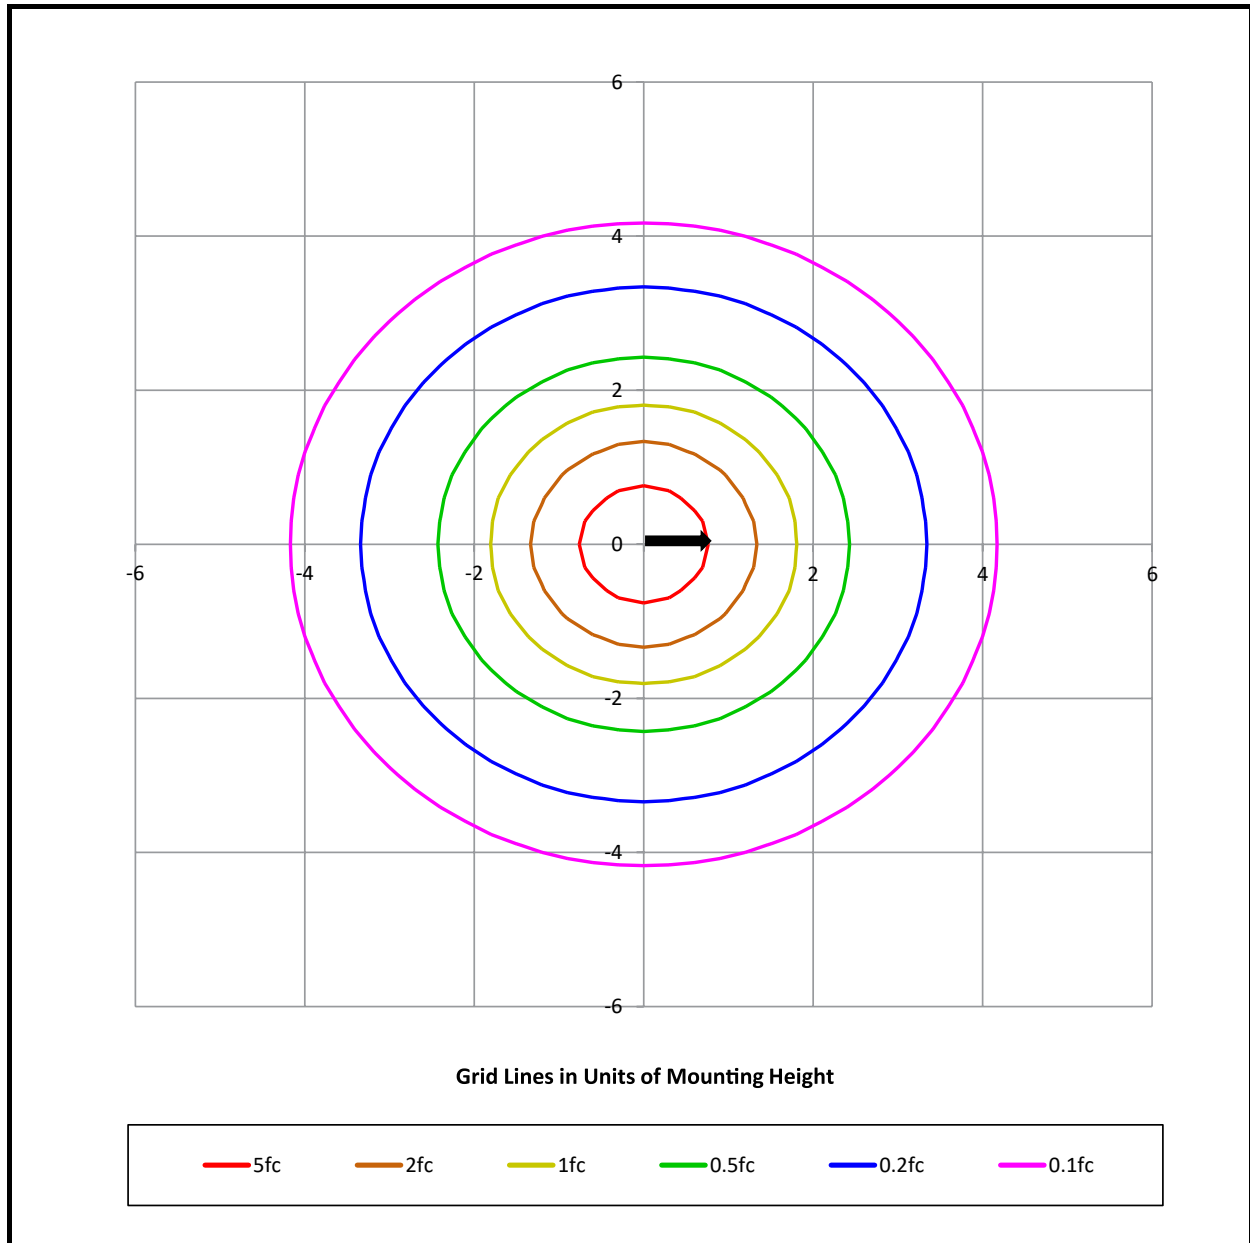

BUG Rating

B0 U0 G1