

LPL6C MADAGASCAR




LPL6C-BLP-XD

Auroralight's **LPL6C Madagascar** is a stunning new entry into the exclusive "Founders Collection." catalog of exquisite Exterior luminaires. The incomparable LPL6C Madagascar features a bold, robust frame, strikingly good looks, stellar glare-free performance, and a Copper louver with precision-machined optics. Use adjacent to paved areas or in planters at the lawns edge. Exclusively from Auroralight.

Features include:

- 6 Watts, up to 211 Lumens
- Cree LED™ XP-L® High Density
- Precision Machined Acrylic Optic
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver AC or DC Input
- Dimmable to <10% (TRIAC/Forward Phase)
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

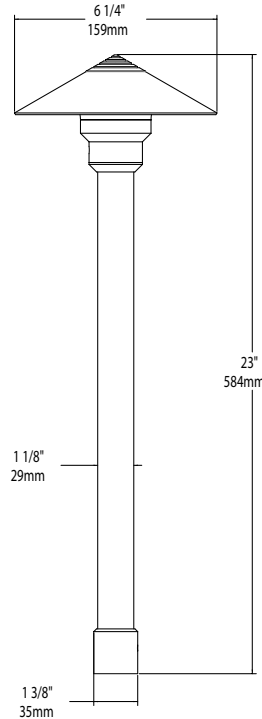

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.

12V

CREE LED
POWERED

IP67

SEE NEXT PAGE FOR ORDERING INFORMATION




LPL6C MADAGASCAR

ORDERING GUIDE: ^{Prefix} **LPL6C** L (LED) PL (PATH LIGHT) 6 (INCHES) C (CONE)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LPL6C-27-2GS-NAT**

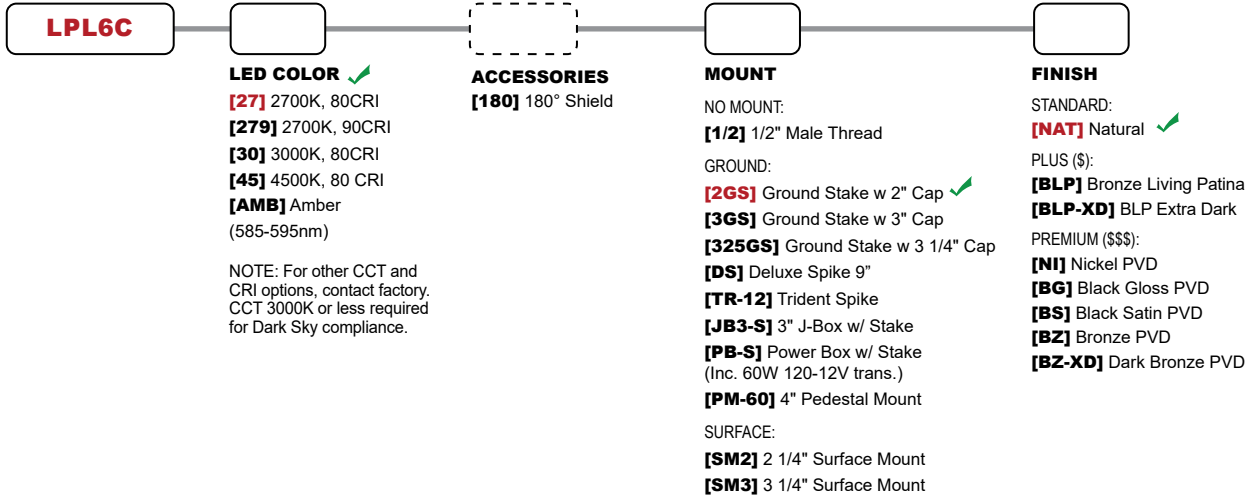


LPL6C MADAGASCAR

PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/lpl6c-madagascar/

Mounting Height - 2 Feet

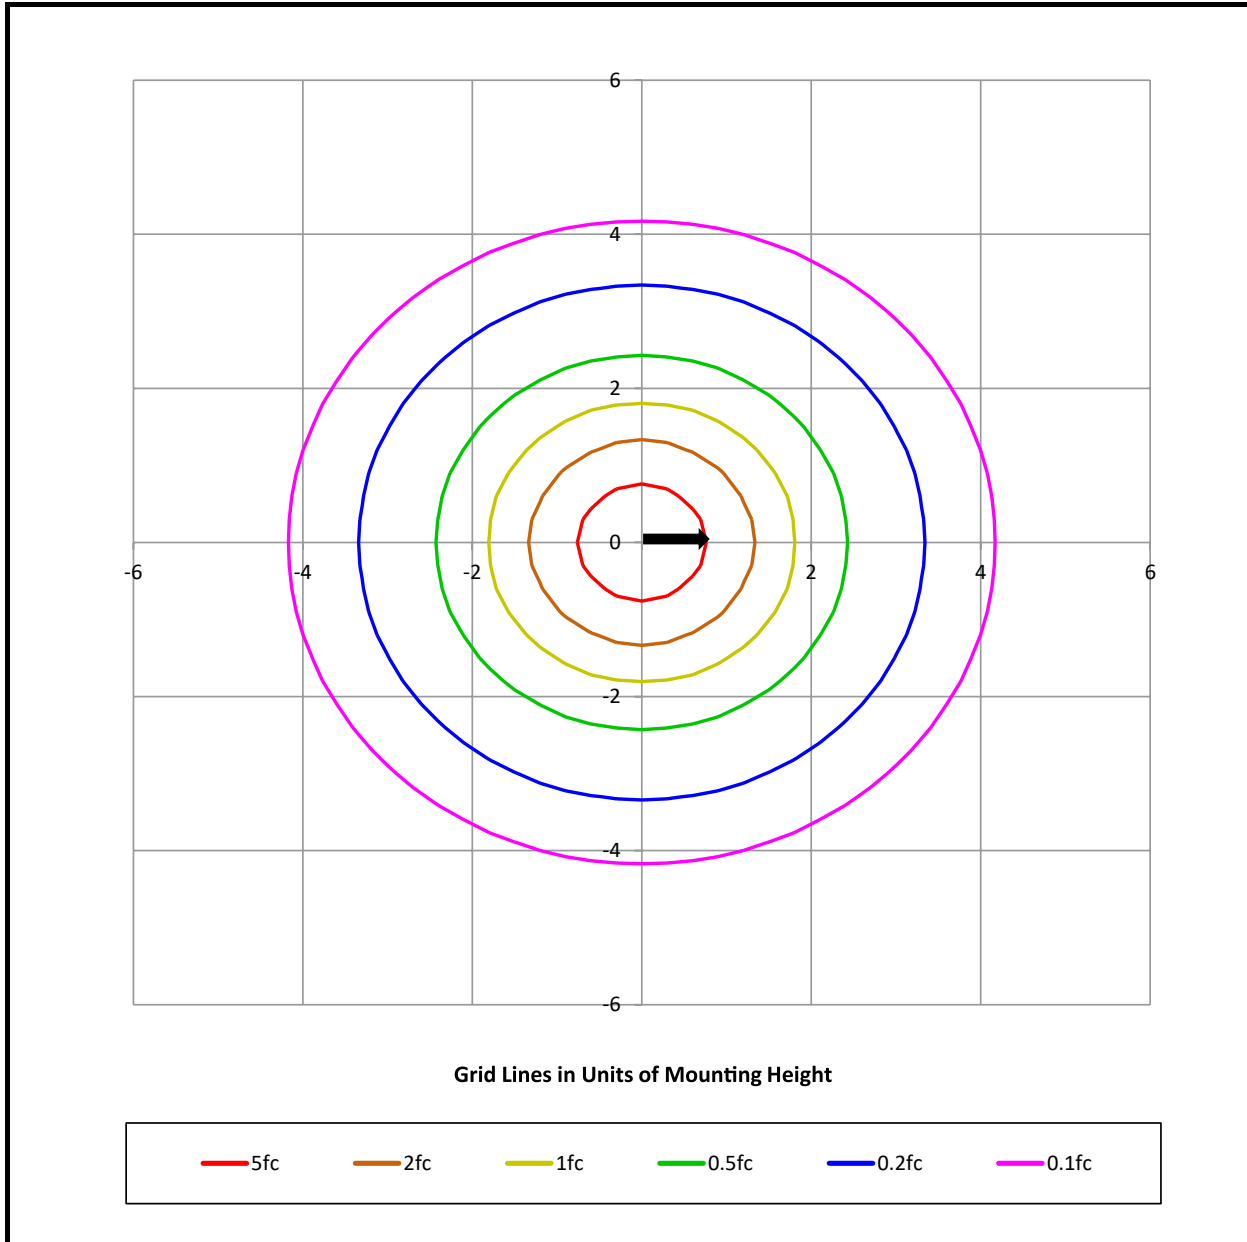

BUG Rating B0 U0 G1