



LPL7 ECLIPSE

The **LPL7 Eclipse** is styled to suit architecture that requires a more substantial and sleek look. The Eclipse is versatile, making it ideal for illuminating walkways, driveways, or large areas requiring moderate light spacing. Every LPL7 path light includes a Thermally Integrated® Field Serviceable LED Module. Utilizing our Copper Core Technology®, the LPL7 module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the entire luminaire to ensure optimal performance, color consistency, and long life!

Features include:



- 6 Watts up to 334 Lumens
- Cree LED™ XLAMP® XHP35 High Density
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Fixed or Extendable Riser
- Solid Copper and Brass Construction
- Contact Factory for Custom Height



LPL7-NAT



LPL7-BLP-XD

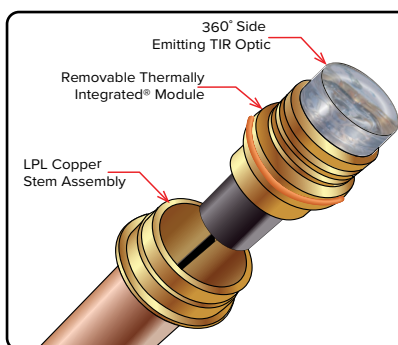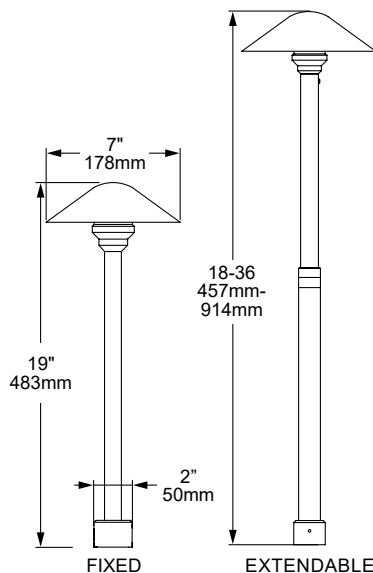

**COPPER
CORE
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



SEE NEXT PAGE FOR ORDERING INFORMATION





LPL7 ECLIPSE

ORDERING GUIDE: ^{Prefix} **LPL7** L (LED) PL (PATH LIGHT) 7 (INCHES)

□ INDICATES REQUIRED FIELD

□ INDICATES OPTIONAL FIELD

✓ INCLUDED IN BASE PRICE

[_] QUICK SPEC (See Below)

QUICK SPEC SKU LPL7-27-FR-C-2GS-NAT

LPL7

LED COLOR ✓

[27] 2700K, 80CRI

[279] 2700K, 90CRI

[30] 3000K, 80CRI

[45] 4500K, 80CRI

[AMB] Amber

(585-595nm)

NOTE: For other CCT and CRI options, contact factory. CCT 3000K or less required for Dark Sky compliance.

HEIGHT

[FR] Fixed Riser (19" OAH) ✓

[EXTR] Extendable Riser (18-36")

LENS ✓

[F] Frosted

[C] Clear

MOUNT

NO MOUNT:

[1/2] 1/2" Male Thread

GROUND:

[2GS] Ground Stake w 2" Cap ✓

[3GS] Ground Stake w 3" Cap

[325GS] Ground Stake w 3 1/4" Cap

[DS] Deluxe Spike 9"

[TR-12] Trident Spike

[JB3-S] 3" J-Box w/ Stake

[PB-S] Power Box w/ Stake (Inc. 60W 120-12V trans.)

[PM-60] 4" Pedestal Mount

SURFACE:

[SM2] 2 1/4" Surface Mount

[SM3] 3 1/4" Surface Mount

FINISH

STANDARD:


[NAT] Natural ✓

PLUS (\$):

[BLP] Bronze Living Patina

[BLP-XD] BLP Extra Dark

EXTENDABLE



EXTR

FIXED



FR

MOUNTS



1/2

2GS

3GS

325GS

DS

TR

JB3-S

PB-S

PM-60


SM2

SM3

PHOTOMETRIC OVERVIEW

Information based on 4.5 Watts. To download more in-depth IES photometric data, visit auroralight.com/product/lpl7-eclipse/

Mounting Height - 2 Feet

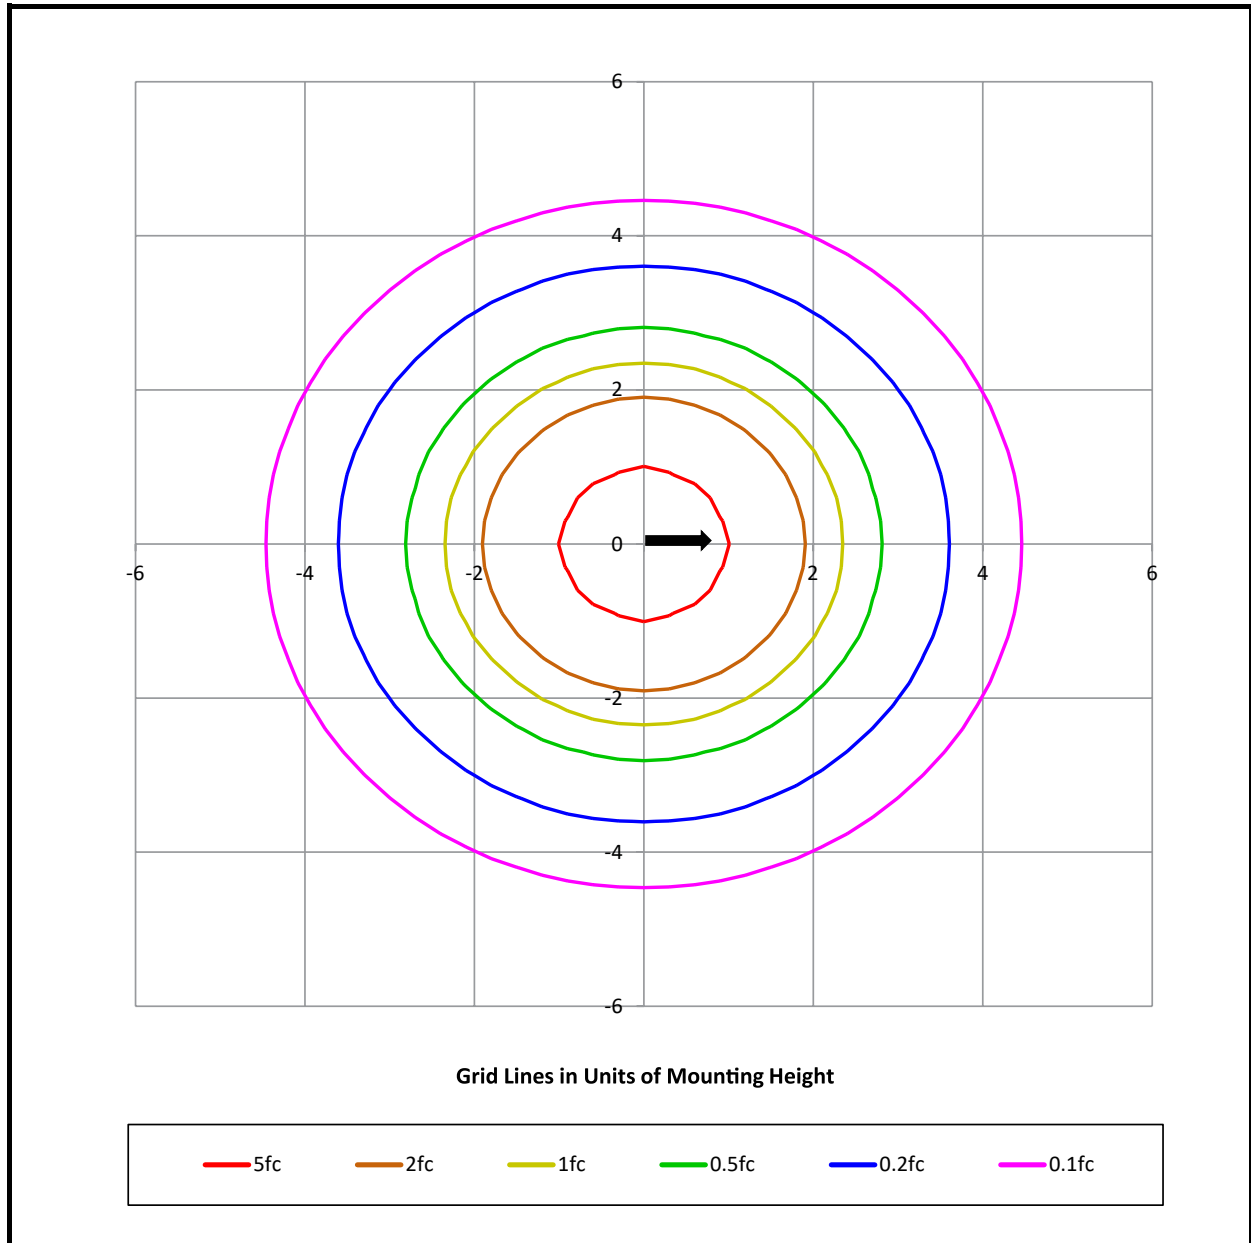

BUG Rating

B0 U0 G1