


LSL10 AGAVE



The new **LSL10 Agave** micro directional luminaire is a high-performance, low-energy LED accent light. Machined from solid brass bar, its artistic styling and precise machining make this fixture attractive and functional. The LSL10 Agave may look small, but at only 3 watts, it produces over 298 lumens making it highly efficient. The Agave is compatible with our entire AMS™ mounting system, offering a plethora of mounting possibilities.

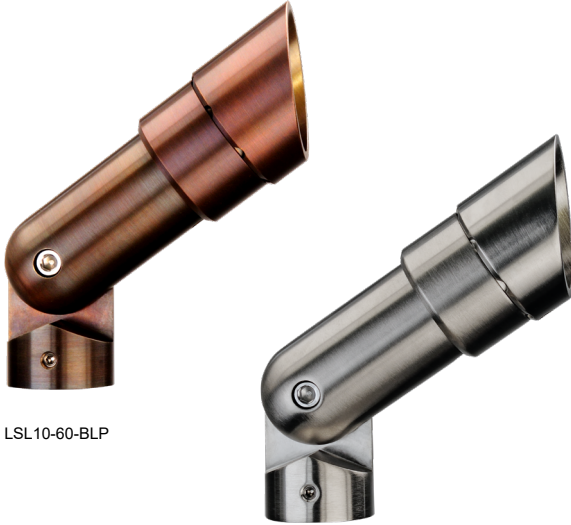


LSL10-60-BLP

LSL10-60-NI

Features include:

- 3 Watts up to 298 Lumens
- Cree LED™ XLAMP® (XP-L)
- Self-aligning and Self Sealing Optic
- Interchangeable UV & Shock Resistant Silicone TIR Optic from 15° to 60°
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4000K (80 CRI) or Amber (585-595nm)
- Thermally Integrated®, Field Serviceable LED Module
- Storm Drain™ Lens Drainage System
- Aurora Mount System (AMS™) Compatible
- 12V Integral Constant Current Driver (Remote 12V AC/DC Transformer Required)
- Dimmable to <10% (TRIAC/Forward Phase) via Compatible Transformer
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Brass Construction
- Patented Optic US 10,655,799 B2

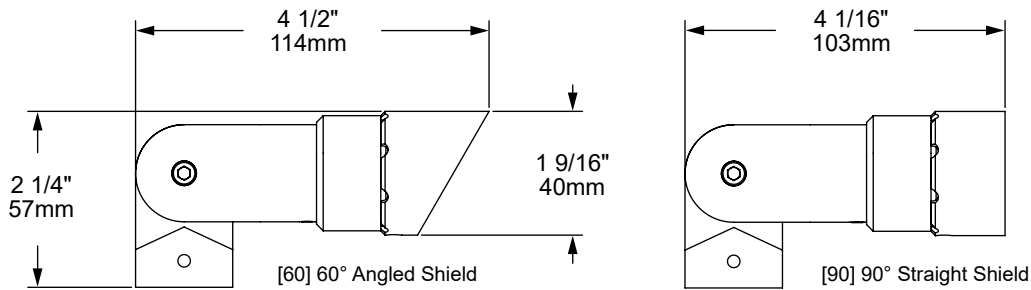

STORM DRAIN

Auroralight's proprietary Storm Drain™ system provides exceptional glare control together with enhanced drainage. The secret is our Exclusive "Linear Weep Hole" With eight or more such holes; water flushes out quickly and entirely with zero light trespasses. Auroralight, Engineering Solutions that make a difference!

AMS
AURORA MOUNT SYSTEM

The Aurora Mount System (AMS™) features 2 axis of adjustment – 360° of fixture rotation at the mount and 230° at the solid brass knuckle. The ultimate in precision aiming without twisting or compromising wire integrity.

- 12V
- THERMALLY INTEGRATED
- CREE LED POWERED
- STORM DRAIN
- IP67

SEE NEXT PAGE FOR ORDERING INFORMATION



Prefix

ORDERING GUIDE: **LSL10** L (LED) SL (SPOTLIGHT) 10 (SERIES)

☐ INDICATES REQUIRED FIELD ☐ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LSL10-60-W-27-BMS-NAT**

LSL10						
<p>SHIELD ✓</p> <p>[60] 60° Angled</p> <p>[90] 90° Straight</p>	<p>OPTIC</p> <p>STANDARD: ✓</p> <p>[N] 15° Narrow</p> <p>[M] 25° Medium</p> <p>[W] 40° Wide</p> <p>[WF] 60° Wide Flood</p> <p>PLUS (\$):</p> <p>[A] All Optics Kit</p>	<p>LED COLOR ✓</p> <p>[27] 2700K, 80 CRI</p> <p>[279] 2700K, 90 CRI</p> <p>[30] 3000K, 80 CRI</p> <p>[40] 4000K, 80 CRI</p> <p>[AMB] Amber (585-595nm)</p> <p>NOTE: For other CCT and CRI options, contact factory</p>	<p>RISER</p> <p>EXTENDABLE (EXTR):</p> <p>[5X10] 5x10"</p> <p>[7X14] 7x14"</p> <p>[9X18] 9x18"</p> <p>[11X22] 11x22"</p> <p>[18X36] 18x36"</p> <p>SUBTERRANEAN (EXTENDABLE): (Mounts are not applicable with STR)</p> <p>[STR-12] 12" above grade 13 1/2" below</p> <p>[STR-18] 18" above grade 19 1/2" below</p> <p>FIXED:</p> <p>[FR-4] 4"</p> <p>[FR-8] 8"</p> <p>[FR-12] 12"</p> <p>[FR-16] 16"</p> <p>[FR-18] 18"</p> <p>90° & TEE OPTIONS: Add -90 (for 90°) or -T (for Tee) to any of the riser part numbers above.</p> <p>NOTE: Risers are not compatible with AMS Mounts.</p>	<p>MOUNT</p> <p>NO MOUNT:</p> <p>[1/2] 1/2" (NPS) Universal Thread ✓</p> <p>GROUND:</p> <p>[AGS] AMS Ground Stake</p> <p>[BMS] Brass Micro Spike</p> <p>[2GS] Ground Stake w/ 2" Cap</p> <p>[DS] 9" Deluxe Spike</p> <p>[TR-12] 12" Trident Spike</p> <p>[JB3-S] 3" Junction Box w/ PVC Stake</p> <p>[PB-S] Power Box w/ PVC Stake Incl. w/ 60W 120-12V Trans.</p> <p>[PM-60-1] Concrete Pedestal Mount w/ 60W 120-12V Trans. (Single Hole/One Fixture)</p> <p>[PM-60-2] Concrete Pedestal Mount w/ 60W 120-12V Trans. (Double Hole/Two Fixtures)</p> <p>TREE:</p> <p>[TS-LD-36] 36" Tree Strap - Light Duty</p> <p>[BTM] Bolt-On Tree Mount</p> <p>[STM] Screw-In Tree Mount</p>	<p>SURFACE:</p> <p>[SMJB-1] Surface Mount J-Box (Single Hole/One Fixture) w/ 5 KO</p> <p>[SMJB-2] Surface Mount J-Box (Double Hole/Two Fixtures) w/ 5 KO</p> <p>[SM2] 2" Surface Mount</p> <p>[SM3] 3" Surface Mount</p> <p>[TM] AMS Trellis Mount</p> <p>[SB] AMS Splice Box</p> <p>COVER PLATE:</p> <p>[CP35-BR] 3 1/2" Brass Cover Plate</p> <p>[CP4-BR] 4" Brass Cover Plate</p> <p>[CP14] 4" AMS J-Box Cover Plate</p> <p>[CP45-BR] 4 1/2" Brass Cover Plate</p> <p>[MC45-1] 4 1/2" Mount Canopy (Single Hole/One Fixture)</p> <p>[MC45-2] 4 1/2" Mount Canopy (Double Hole/Two Fixtures)</p> <p>[PC-60-1] 4 1/2" Power Canopy Incl. w/ 60W 120-12V Trans. (Single Hole/One Fixture)</p> <p>[PC-60-2] 4 1/2" Power Canopy Incl. w/ 60W 120-12V Trans. (Double Hole/Two Fixtures)</p> <p>NOTE: Universal adapter included w/ fixture, except where AMS is noted. Most common configurations listed above; See Mount/Riser spec sheets for all options.</p>	<p>FINISH</p> <p>STANDARD:</p> <p>[NAT] Natural ✓</p> <p>PLUS (\$):</p> <p>[BLP] Bronze Living Patina</p> <p>[BLP-XD] BLP Extra Dark</p> <p>PREMIUM (\$\$\$):</p> <p>[NI] Nickel PVD</p> <p>[BG] Black Gloss PVD</p> <p>[BS] Black Satin PVD</p> <p>[BZ] Bronze PVD</p> <p>[BZ-XD] Dark Bronze PVD</p>


MOST POPULAR MOUNT OPTIONS




GROUND




COVER PLATE

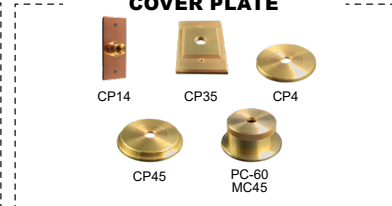


EXTENDABLE



SUBTERRANEAN (EXTENDABLE)




FIXED



SURFACE



TREE

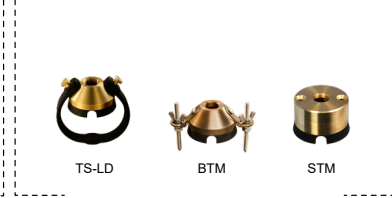


LSL10 AGAVE


PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/lsl10-agave/


3W 4000K 15° (NARROW) 298.6 LUMENS • CBCP 2499 • BUG B1 U0 G0 AURORALIGHT LSL10-N-40		
30 FT	2.78	7.89
26 FT	3.70	6.84
22 FT	5.16	5.79
18 FT	7.71	4.73
14 FT	12.8	3.68
10 FT	25.0	2.63
6 FT	69.4	1.58
Distance From Fixture	Footcandles	Beam Width



3W 3000K 25° (MEDIUM) 261.9 LUMENS • CBCP 1127 • BUG B1 U0 G0 AURORALIGHT LSL10-M-30		
30 FT	1.25	12.4
26 FT	1.67	10.7
22 FT	2.33	9.08
18 FT	3.48	7.43
14 FT	5.75	5.78
10 FT	11.3	4.13
6 FT	31.3	2.48
Distance From Fixture	Footcandles	Beam Width



3W 3000K 40° (WIDE) 266.7 LUMENS • CBCP 616 • BUG B1 U0 G0 AURORALIGHT LSL10-W-30		
30 FT	0.682	18.3
26 FT	0.908	15.9
22 FT	1.27	13.5
18 FT	1.90	11.0
14 FT	3.13	8.56
10 FT	6.14	6.11
6 FT	17.1	3.67
Distance From Fixture	Footcandles	Beam Width



3W 3000K 60° (WIDE FLOOD) 252.3 LUMENS • CBCP 249 • BUG B0 U0 G0 AURORALIGHT LSL10-WF-30		
30 FT	0.276	27.0
26 FT	0.368	23.4
22 FT	0.514	19.8
18 FT	0.768	16.2
14 FT	1.27	12.6
10 FT	2.49	8.99
6 FT	6.91	5.40
Distance From Fixture	Footcandles	Beam Width

