



LSM3 MICRO CASCADE




The **LSM3 Micro Cascade** is a surface-mounted LED wall light that offers excellent illumination of walls and adjacent walkways in a stylish yet rugged design featuring a precision-machined acrylic optic with a deep prismatic design for uniform distribution. It is sized to fit on standard 4" by 4" posts, making this an ideal fixture for decks and docks. The entire fixture is machined from a solid brass bar and designed to be surface mounted without any additional box; it may be recessed up to a 1/2" for a lower profile installation.

Features include:


- 3 Watts up to 104 Lumens
- Cree LED™ XP-L® High Density
- Precision Machined Acrylic Optic
- 2700K (80 & 90 CRI) 3000K (80 CRI), 4500K (80 CRI) or Amber 585-595nm
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver (Remote 12V AC/DC Transformer Required)
- Dimmable to <10% (TRIAC/Forward Phase) via Compatible Transformer
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Brass Construction



LSM3-R-G-BLP &
LSM3-SM-NG-NAT

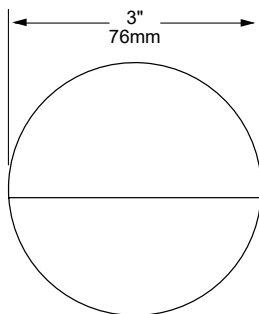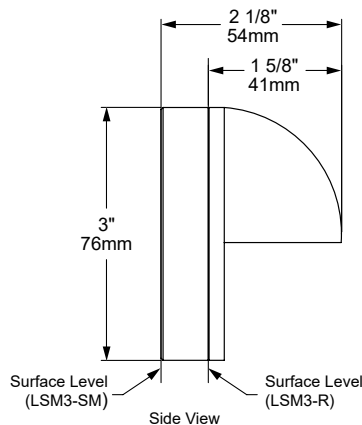

LSM3-SM Front View



LSM3-R Front View

**COPPER
CORE
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



SEE NEXT PAGE FOR ORDERING INFORMATION



LSM3 MICRO CASCADE

ORDERING GUIDE: ^{Prefix} **LSM3** L (LED) SM (SURFACE MOUNT) 3 (SERIES)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU LSM3-SM-NG-27-NAT


LSM3				
MOUNTING ✓	BODY ✓	LED COLOR ✓	FINISH	
[SM] Surface Mount	[G] Grooves	[27] 2700K, 80 CRI	STANDARD:	
[R] Recessed	[NG] No Grooves	[279] 2700K, 90 CRI	[NAT] Natural ✓	
		[30] 3000K, 80 CRI	PLUS (\$):	
		[45] 4500K, 80 CRI	[BLP] Bronze Living Patina	
		[AMB] Amber	[BLP-XD] BLP Extra Dark	
		(585-595 nm)	PREMIUM (\$\$\$):	
		NOTE: For other CCT and CRI options, contact factory. CCT 3000K or less required for Dark Sky compliance.	[NI] Nickel PVD	
			[BG] Black Gloss PVD	
			[BS] Black Satin PVD	
			[BZ] Bronze PVD	
			[BZ-XD] Dark Bronze PVD	
			[PC] Powder Coat Custom Color (Contact Factory for Color Options)	

LSM3 MICRO CASCADE

PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lsm3-micro-cascade/

Mounting Height - 2 Feet

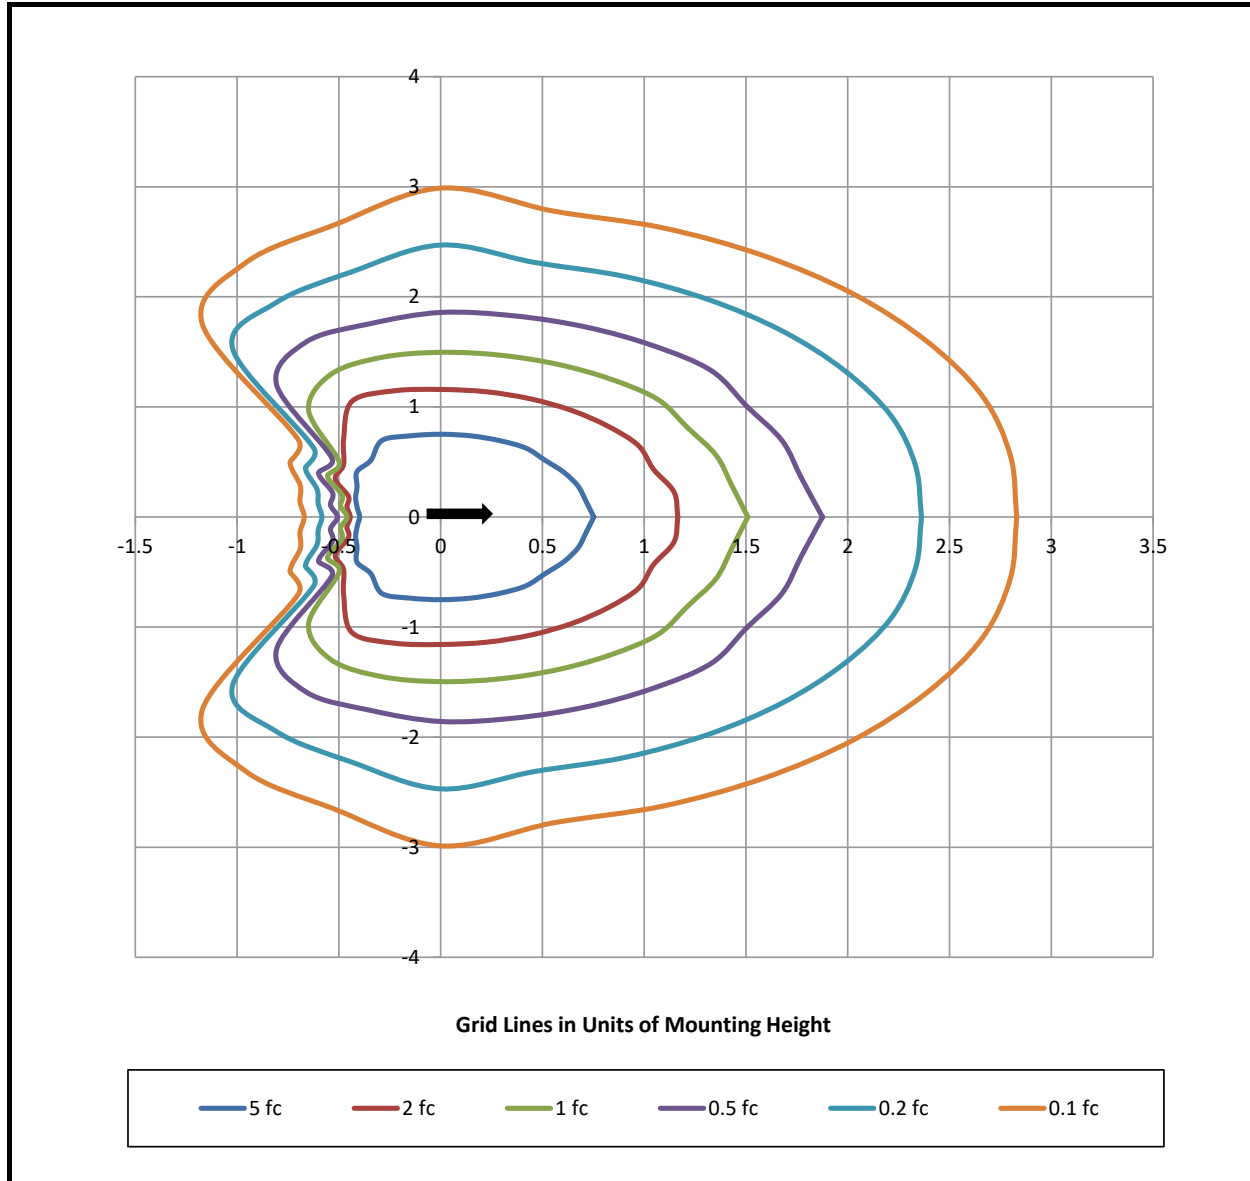

BUG Rating

B0 U1 G0