

## LSM4 CASCADE








LSM4-G-BLP-XD & LSM4-NG-BLP

The **LSM4 Cascade** is a surface-mounted, high-performance LED wall light that offers excellent illumination of walls and walkways in a stylish yet rugged design. The LSM4 Cascade is meticulously carved from a solid brass ingot using fully automated CNC machinery. The shock-proof glass lens is machined into a unique shape using diamond cutters to enhance performance and features a premium silicone O-ring to create a vapor-tight seal. The fixture is designed to be surface mounted with the solid brass micro back-box, which provides ample space for wire connection. The LSM4 is a superb quality luminaire available exclusively from Auroralight.

**Features include:**

- 2 or 4 Watts up to 314 Lumens
- 2700K (90 CRI) or 3000K (80 CRI)
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver (Remote 12V AC/DC Transformer Required)
- Dimmable to <10% (TRIAC/Forward Phase) via Compatible Transformer
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Premium mounting hardware included
- Solid Brass Construction

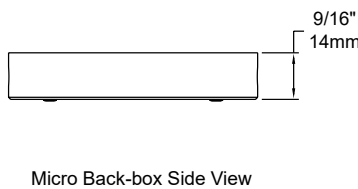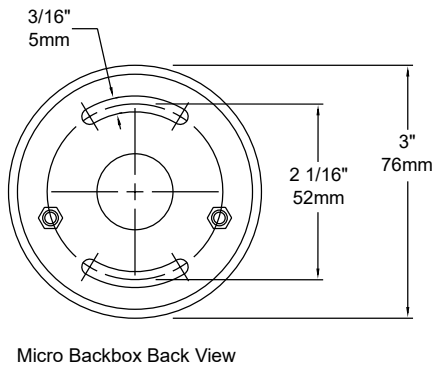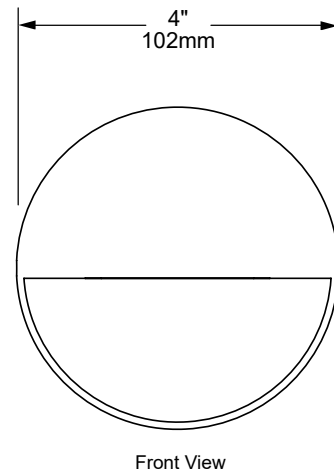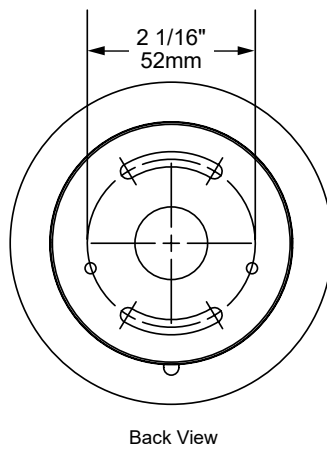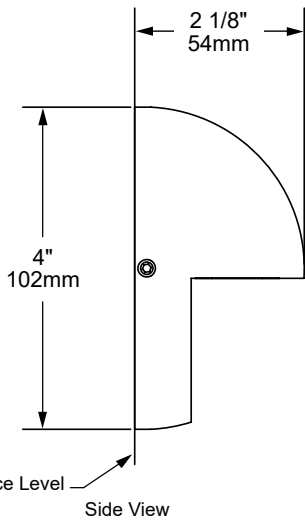

### COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.

-  12V
-  THERMALLY INTEGRATED
-  IDA DARK SKY APPROVED
-  IP67

**SEE NEXT PAGE FOR ORDERING INFORMATION**




## LSM4 CASCADE

**ORDERING GUIDE:** <sup>Prefix</sup> **LSM4** L (LED) SM (SURFACE MOUNT) 4 (SERIES)

INDICATES REQUIRED FIELD     INDICATES OPTIONAL FIELD     INCLUDED IN BASE PRICE    [ \_ ] QUICK SPEC (See Below)

**QUICK SPEC SKU**    **LSM4-NG-4-279-NAT**

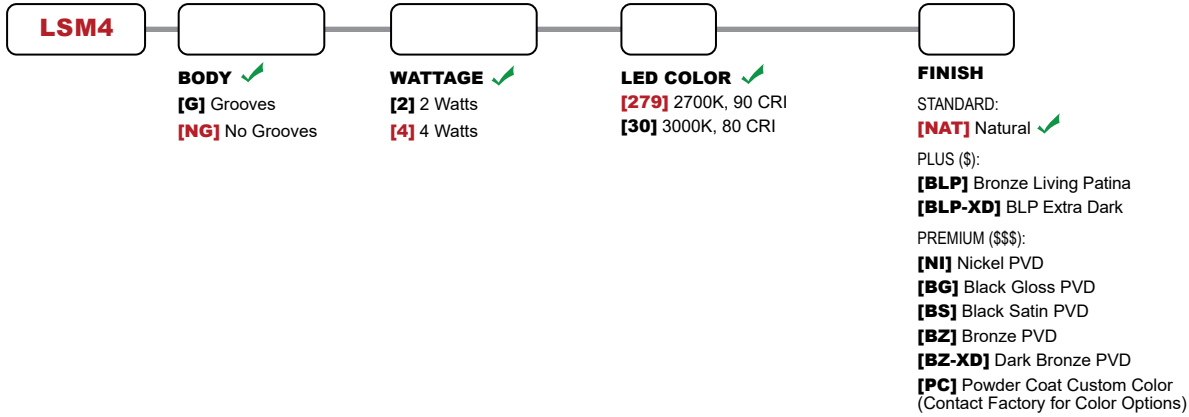


# LSM4 CASCADE

## PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit <https://auroralight.com/product/lsm4-cascade/>

Mounting Height - 2 Feet

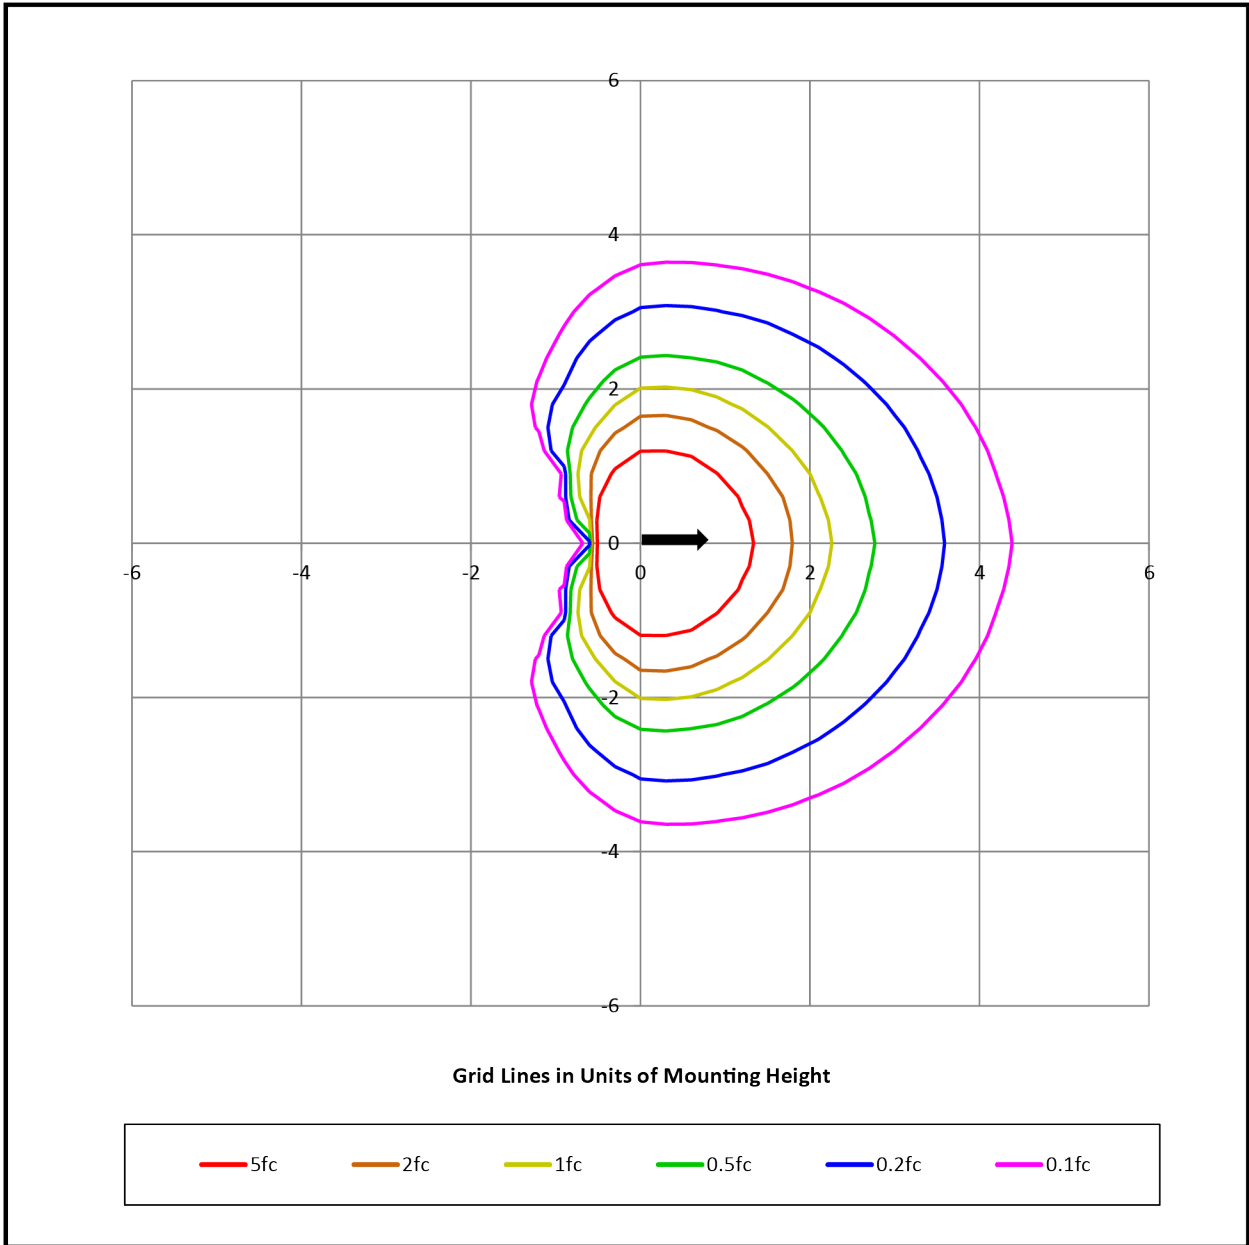

**BUG Rating**    B0 U1 G0