

Signature Series Classic Auroralight

LSW8-BR-R-NAT

TYPE:


CAT. #: LSW8-

# **LSW8** MERIDIAN

The **LSW8 Meridian** offers excellent illumination of walkways and steps in a small, rugged design. The graceful appearance of the eyelid effectively shields against glare, while the small aperture allows excellent forward projection with even illumination side to side. Pair with our LSW8-PL & LSW8-FL to provide design continuity, uniform spacing and light levels in the absence of a structure.

## Features include:

- 1.25 Watts up to 123 Lumens
- Cree LED™ XLAMP® (XP-L)
- Interchangeable UV & Shock Resistant Silicone Optic
- 2700K (80 & 90 CRI), 3000K (80 CRI), 4000K (80 CRI), or Amber (585-595)
- Thermally Integrated<sup>®</sup> w/ Copper Core Technology<sup>®</sup>
- 12V Integral Constant Current Driver (Remote 12V AC/DC Transformer Required)
- Dimmable to <10% (TRIAC/Forward Phase) via Compatible Transformer
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Dual Listed for Interior IC, and Exterior Wet Location Use
- Solid Brass and Copper Construction

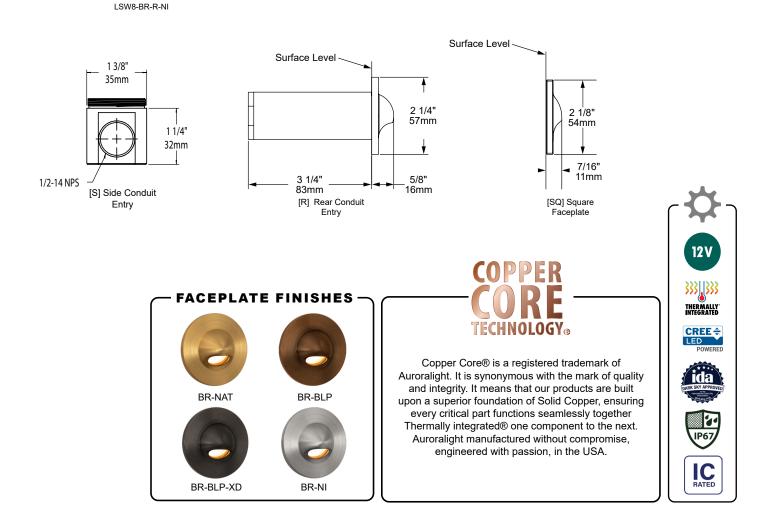

### SEE NEXT PAGE FOR ORDERING INFORMATION



MADE \*USA\*





TYPE: CAT. #: LSW8-

**LSW8** MERIDIAN



#### ORDERING GUIDE: (LSW8) L (LED) SW (STEP/WALL LIGHT) 8 (SERIES)

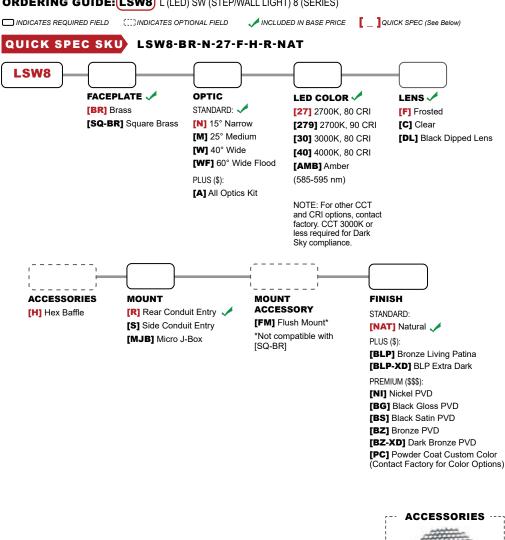

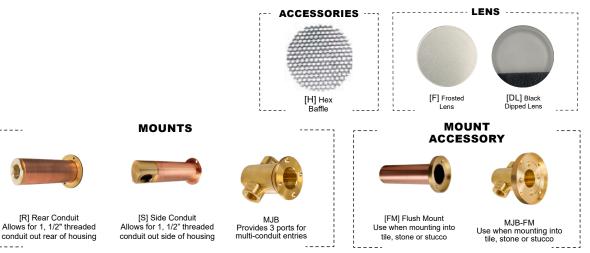





TYPE:

CAT. #: LSW8-

## **LSW8** MERIDIAN

## **PHOTOMETRIC OVERVIEW**

To download more in-depth IES photometric data, visit auroralight.com/product/Isw8-meridian/

1.5 -1.5 **Grid Lines in Units of Mounting Height** -----0.5 fc -0.2 fc -0.1 fc

Mounting Height - 2 Feet



