



LWL5 LIGHTHAUS



ORDERING GUIDE: ^{Prefix} **LWL5** L (LED) WL (WELL LIGHT) 5 (SERIES)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LWL5-FF-W-27-H-NAT**

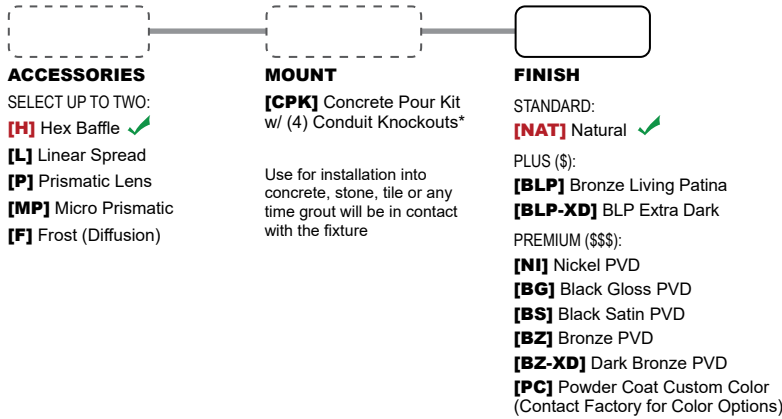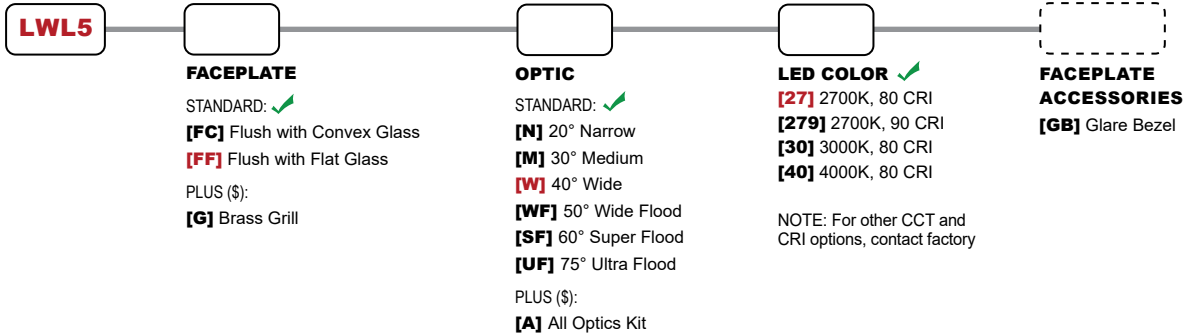


FACEPLATE ACCESSORIES



GB

ACCESSORIES



H

L

P

MP

F

MOUNT




CPK

LWL5 LIGHTHAUS


PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lwl5-lighthouse/


3000K 20° (NARROW) 487.3 LUMENS • CBCP 1342 AURORALIGHT LWL5-N-30		
30 FT	1.49	11.6
26 FT	1.98	10.1
22 FT	2.77	8.53
18 FT	4.14	6.98
14 FT	6.85	5.43
10 FT	13.4	3.88
6 FT	37.3	2.33
Distance From Fixture	Footcandles	Beam Width




3000K 30° (MEDIUM) 494.5 LUMENS • CBCP 1427 AURORALIGHT LWL5-M-30		
30 FT	1.59	14.8
26 FT	2.11	12.8
22 FT	2.95	10.8
18 FT	4.40	8.86
14 FT	7.28	6.89
10 FT	14.3	4.92
6 FT	39.6	2.95
Distance From Fixture	Footcandles	Beam Width




3000K 40° (WIDE) 527.8 LUMENS • CBCP 895 AURORALIGHT LWL5-W-30		
30 FT	0.995	21
26 FT	1.32	18.3
22 FT	1.85	15.5
18 FT	2.76	12.7
14 FT	4.57	9.85
10 FT	8.95	7.03
6 FT	24.9	4.22
Distance From Fixture	Footcandles	Beam Width



3000K 50° (WIDE FLOOD) 522.0 LUMENS • CBCP 586 AURORALIGHT LWL5-WF-30		
30 FT	0.606	29.1
26 FT	0.807	25.2
22 FT	1.13	21.3
18 FT	1.68	17.4
14 FT	2.78	13.6
10 FT	5.46	9.69
6 FT	15.2	5.81
Distance From Fixture	Footcandles	Beam Width



3000K 60° (SUPER FLOOD) 495.5 LUMENS • CBCP 396 AURORALIGHT LWL5-SF-30		
30 FT	0.410	34.2
26 FT	0.546	29.7
22 FT	0.763	25.1
18 FT	1.14	20.5
14 FT	1.88	16.0
10 FT	3.69	11.4
6 FT	10.3	6.84
Distance From Fixture	Footcandles	Beam Width

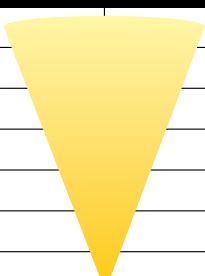

3000K 75° (ULTRA FLOOD) 440.1 LUMENS • CBCP 261 AURORALIGHT LWL5-UF-30		
30 FT	0.260	40.0
26 FT	0.347	34.7
22 FT	0.484	29.4
18 FT	0.724	24.0
14 FT	1.20	18.7
10 FT	2.34	13.3
6 FT	6.51	8.01
Distance From Fixture	Footcandles	Beam Width

