

HDL11-ACS TAOS

An **HDL11 Taos** pendant is the perfect option for use with our exclusive ACS. (Aurora Catenary System). With several optic and shroud options ranging from a discreet NS up to an 8" acrylic lens, four optical choices, three sizes of festoon lenses, the HDL11 is highly configurable. The Taos is a perfect choice for many hospitality, retail plaza, or residential applications.

Fixture Features include:

- Interchangeable LED Module in 2, 4 or 6 Watts up to 345 Lumens
- Cree LED™ XLAMP® High Density (XHP)
- Interchangeable UV & Shock Resistant Silicone Optic from 15° to 60°
- 2700K (80 & 90 CRI), 3000K (80 CRI), or 4500K (80 CRI)
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Also available with Non-Catenary Hanging and Ridgid mount options (See HDL11-RM and HDL11-HL)

Catenary features include:


- Pre-assembled System for Easy Installation
- Compatible with Catenary Cable up to 1/4" dia. (by others)
- Rigid Mount utilizes Swivel-Pro™ allowing up to 15° of cable swag
- Cable Brake System™ prevents luminaire slippage
- J-box and Luminaire Machined from Solid c3600 Brass Alloy
- UL Approved System



HDL11-ACS-G-90-HL-BLP

HDL11-ACS-NG-P1-RM-NI

HDL11-ACS-NG-S1-HL-BLP-XD

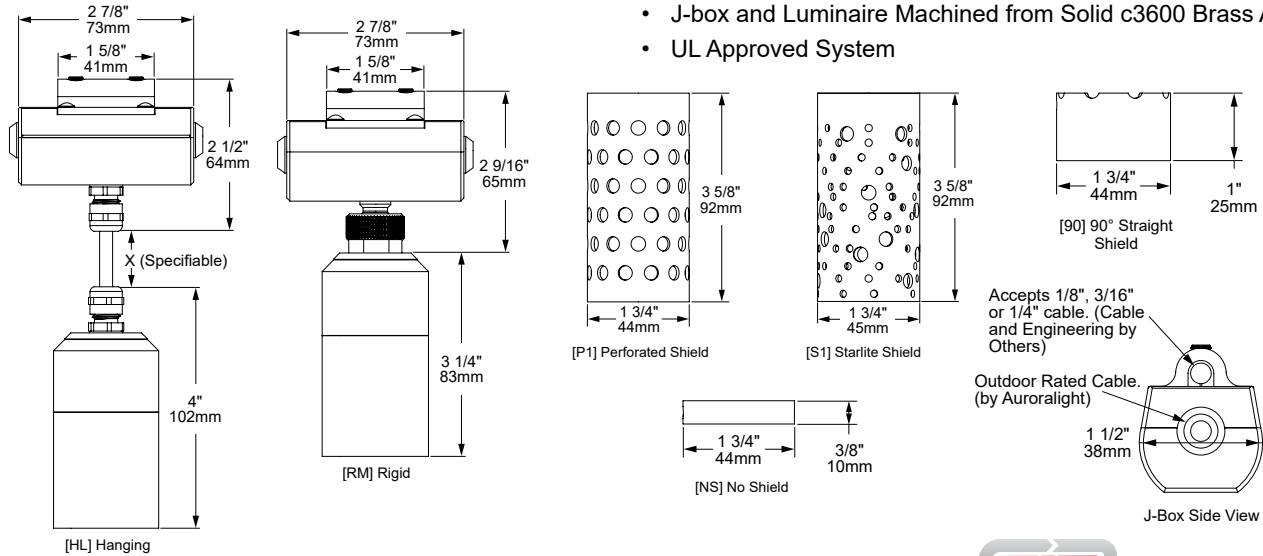

[HL] Hanging

[RM] Rigid

[P1] Perforated Shield

[S1] Starlite Shield

[NS] No Shield

[90] 90° Straight Shield

J-Box Side View

Accepts 1/8", 3/16" or 1/4" cable. (Cable and Engineering by Others)

Outdoor Rated Cable. (by Auroralight)

DOWNLOAD OUR ACS DESIGN GUIDE TO START BUILDING YOURS TODAY

FIT
FIELD-INTERCHANGEABLE TECHNOLOGY

The FIT™ IP67 module is built on Auroralight's Copper Core Technology® platform and includes FIT™ Acrylic Optics.

COPPER CORE TECHNOLOGY®

SEE NEXT PAGE FOR ORDERING INFORMATION

HDL11-ACS TAOS



Prefix

ORDERING GUIDE: **HDL11-ACS** H (HIGH PERFORMANCE) DL (DOWN LIGHT) 11 (SERIES) ACS (AURORA CATENARY SYSTEM)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **HDL11-ACS-NG-90-6-W-27-H-HL-NAT**

HDL11-ACS

BODY ✓
[G] Grooves
[NG] No Grooves

SHIELD
 STANDARD: ✓
[NS] No Shield
[90] 90° Straight Shield

WATTAGE ✓
[2] 2W
[4] 4W
[6] 6W

OPTIC ✓
[N] 15° Narrow
[M] 25° Medium
[W] 40° Wide
[WF] 60° Wide Flood
[A] All Optics Kit

LED COLOR ✓
[27] 2700K, 80 CRI
[279] 2700K, 90 CRI
[30] 3000K, 80 CRI
[45] 4500K, 80 CRI

NOTE: For other CCT and CRI options, contact factory. CCT 3000K or less required for Dark Sky compliance.


PLUS (\$):
[P1] Perforated (1 3/4" dia.)
[S1] Starlite (1 3/4" dia.)
[AC-X] Acrylic Lens (4, 6 or 8")
[X] = Specify Length

ACCESSORIES
 SELECT UP TO TWO
[H] Hex Baffle
[L] Linear Spread
[P] Prismatic Lens
[MP] Micro Prismatic
[F] Frost (Diffusion)


MOUNT ✓
[HL] Hanging
[RM] Rigid

FINISH
 STANDARD:
[NAT] Natural ✓
 PLUS (\$):
[BLP] Bronze Living Patina
[BLP-XD] BLP Extra Dark
 PREMIUM (\$\$\$):
[NI] Nickel PVD
[BG] Black Gloss PVD
[BS] Black Satin PVD
[BZ] Bronze PVD
[BZ-XD] Dark Bronze PVD

ACCESSORIES

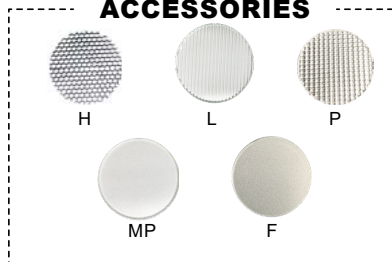

MOUNTS

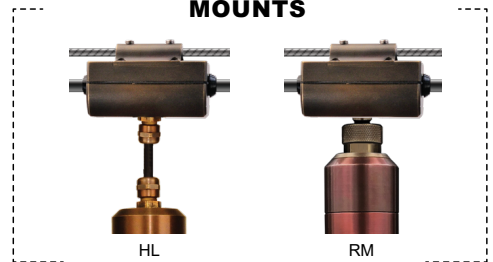


HDL11-ACS TAOS


PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/hdl11-acs-taos/

6W 2700K Acrylic Lens 350.5 LUMENS • CBCP 40 • BUG B0 U3 G1 AURORALIGHT HDL11-HL-AC-6-M-27		
4 FT	2.33	6.56
6 FT	1.03	9.83
8 FT	0.581	13.1
10 FT	0.372	16.4
12 FT	0.258	19.7
14 FT	0.190	22.9
16 FT	0.145	26.2
Distance From Fixture	Footcandles	Beam Width

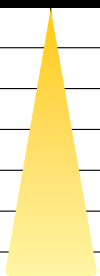

6W 2700K Perforated Shield 218.7 LUMENS • CBCP 1419 • BUG B0 U1 G0 AURORALIGHT HDL11-HL-P1-6-M-27		
4 FT	88.7	1.43
6 FT	39.4	2.15
8 FT	22.2	2.87
10 FT	14.2	3.58
12 FT	9.86	4.30
14 FT	7.24	5.01
16 FT	5.54	5.73
Distance From Fixture	Footcandles	Beam Width

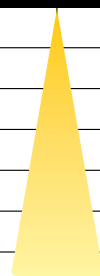

6W 2700K 90° Straight Shield 345.0 LUMENS • CBCP 1358 • BUG B1 U1 G0 AURORALIGHT HDL11-HL-90-6-M-27		
4 FT	84.9	1.82
6 FT	37.7	2.72
8 FT	21.2	3.63
10 FT	13.6	4.54
12 FT	9.43	5.45
14 FT	6.93	6.35
16 FT	5.30	7.26
Distance From Fixture	Footcandles	Beam Width

