


HPL5 MADAGASCAR

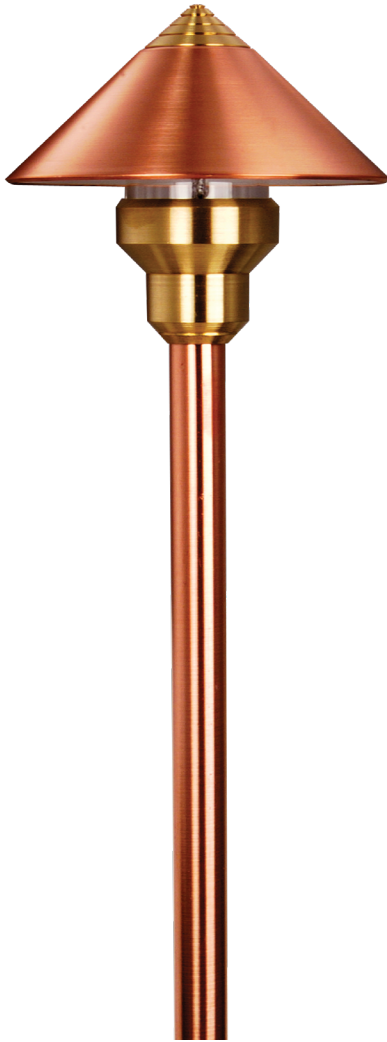


HPL5-NAT

The compact size of the **HPL5 Madagascar** allows for it to be installed discretely into planters, making it ideal for illuminating pathways and intimate garden areas. Use anywhere a less obvious light source is desired. With a timeless design, precision manufacturing, and the highest quality materials, our HPL luminaires are a perfect solution. Every HPL series path light gives you a choice of a Thermally Integrated® Field Serviceable LED Module or traditional Halogen lamp. Using Copper Core Technology®, the HPL module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency, and long life!

Features include:

- Interchangeable LED Module in 2.5 or 3.5 Watts
- Up to 126 Lumens
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

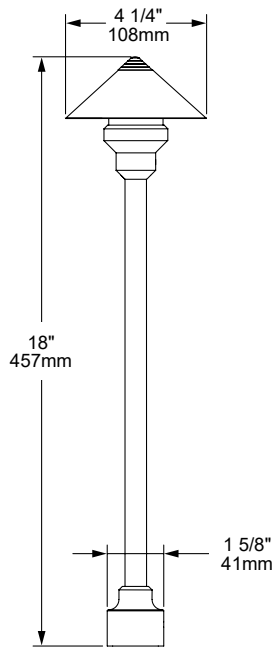

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.

12V

THERMALLY INTEGRATED

IDA (DARK SKY APPROVED)

IP67

SEE NEXT PAGE FOR ORDERING INFORMATION



TYPE:
CAT. #: HPL5-


HPL5 MADAGASCAR

ORDERING GUIDE: ^{Prefix} **HPL5** H (HIGH PERFORMANCE) PL (PATH LIGHT) 5 (INCHES)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU **HPL5-327-GS-NAT**

HPL5				
	<p>Auroralight LED Module ✓</p> <p>[227] 2.5 Watts, 2700K</p> <p>[230] 2.5 Watts, 3000K</p> <p>[327] 3.5 Watts, 2700K</p> <p>[330] 3.5 Watts, 3000K</p>	<p>ACCESSORIES (Select One)</p> <p>[180] 180° Directional Reflector™ *</p> <p>[270] 270° Directional Reflector™ *</p> <p>[ID] Internal Diffuser (Frosted)</p> <p>* Visible light</p>	<p>MOUNT</p> <p>NO MOUNT:</p> <p>[1/2] 1/2" Male Thread</p> <p>GROUND:</p> <p>[GS] Ground Stake ✓</p> <p>[2GS] Ground Stake w 2" Cap</p> <p>[3GS] Ground Stake w 3" Cap</p> <p>[325GS] Ground Stake w 3 1/4" Cap</p> <p>[DS] Deluxe Spike 9"</p> <p>[TR-12] Trident Spike</p> <p>[JB3-S] 3" J-Box w/ Stake</p> <p>[PB-S] Power Box w/ Stake (Inc. 60W 120-12V trans.)</p> <p>[PM-60] 4" Pedestal Mount</p> <p>SURFACE:</p> <p>[SM2] 2 1/4" Surface Mount</p> <p>[SM3] 3 1/4" Surface Mount</p>	<p>FINISH</p> <p>STANDARD:</p> <p>[NAT] Natural ✓</p> <p>PLUS (\$):</p> <p>[BLP] Bronze Living Patina</p> <p>[BLP-XD] BLP Extra Dark</p> <p>PREMIUM (\$\$\$):</p> <p>[NI] Nickel PVD</p> <p>[BG] Black Gloss PVD</p> <p>[BS] Black Satin PVD</p> <p>[BZ] Bronze PVD</p> <p>[BZ-XD] Dark Bronze PVD</p>

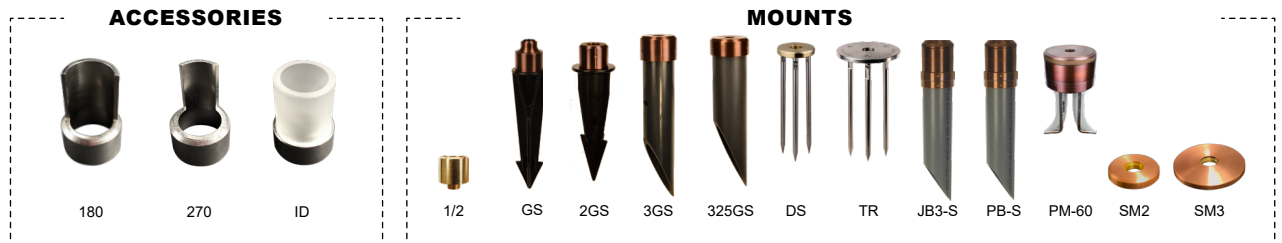


HPL5 MADAGASCAR

PHOTOMETRIC OVERVIEW

Information based on 3.5 Watts. To download more in-depth IES photometric data, visit auroralight.com/product/hpl5-madagascar/

Mounting Height - 2 Feet

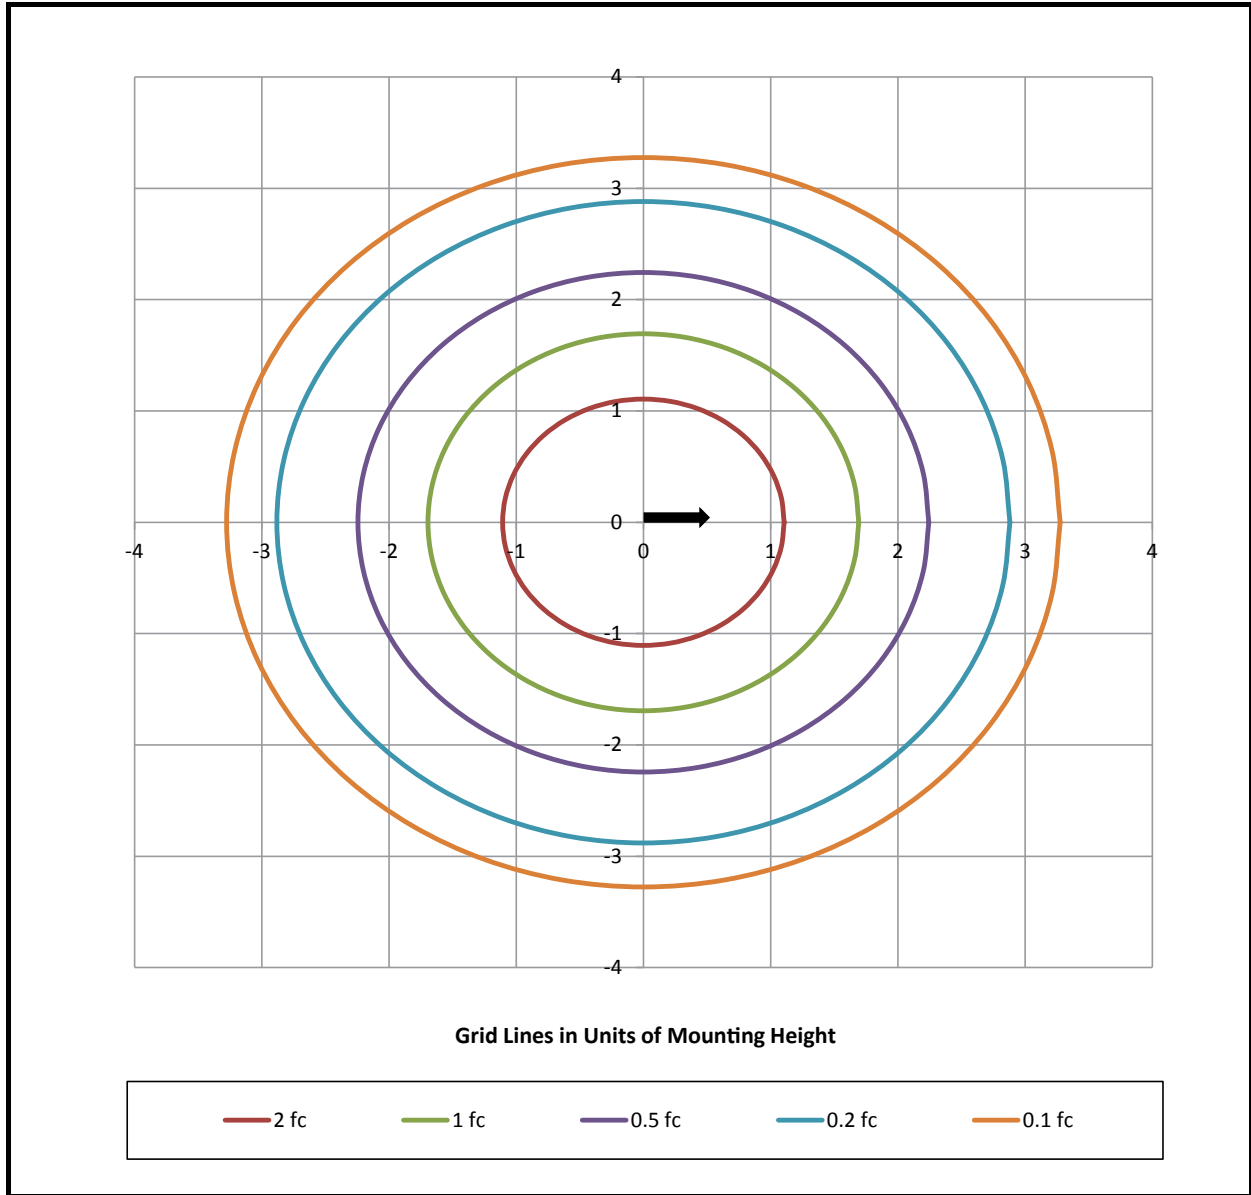

BUG Rating B0 U1 G0