

TYPE:

CAT. #: HPL6C-






HPL6C-BLP


HPL6C MADAGASCAR

The compact size of the **HPL6C Madagascar** allows for it to be installed discretely into planters, making it ideal for illuminating pathways and intimate garden areas. Use anywhere a less obvious light source is desired. With a timeless design, precision manufacturing, and the highest quality materials, our HPL luminaires are a perfect solution. Every HPL series path light gives you a choice of a Thermally Integrated® Field Serviceable LED Module or traditional Halogen lamp. Using Copper Core Technology®, the HPL module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency, and long life!

Features include:

- Interchangeable LED Module in 2.5 or 3.5 Watts
- · Up to 133 lumens
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- · Contact Factory for Custom Height

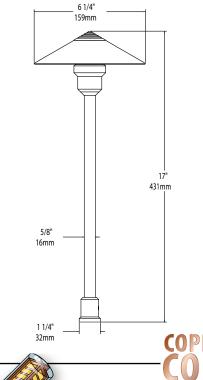



Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



SEE NEXT PAGE FOR ORDERING INFORMATION







TYPE:

CAT. #: HPL6C-



HPL6C MADAGASCAR

ORDERING GUIDE: (HPL6C) H (HIGH PERFORMANCE) PL (PATH LIGHT) 6 (INCHES) C (CONE)

☐ INDICATES REQUIRED FIELD

(III) INDICATES OPTIONAL FIELD INCLUDED IN BASE PRICE QUICK SPEC (See Below)

QUICK SPEC SKU

HPL6C-327-GS-NAT

HPL6C

Auroralight LED Module

[227] 2.5 Watts, 2700K

[230] 2.5 Watts, 3000K

[327] 3.5 Watts, 2700K

[330] 3.5 Watts, 3000K

ACCESSORIES

[180] 180° Directional Reflector™ *

[270] 270° Directional Reflector™ *

[ID] Internal Diffuser (Frosted)

* Visible light

MOUNT

NO MOUNT:

[1/2] 1/2" Male Thread

GROUND:

[GS] Ground Stake 🗸

[2GS] Ground Stake w 2" Cap

[3GS] Ground Stake w 3" Cap

[325GS] Ground Stake w 3 1/4" Cap

[DS] Deluxe Spike 9"

[TR-12] Trident Spike

[JB3-S] 3" J-Box w/ Stake

[PB-S] Power Box w/ Stake (Inc. 60W 120-12V trans.)

[PM-60] 4" Pedestal Mount

SURFACE:

[SM2] 2 1/4" Surface Mount

[SM3] 3 1/4" Surface Mount

FINISH

STANDARD:

[NAT] Natural 🗸

PLUS (\$):

[BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark

PREMIUM (\$\$\$):

[NI] Nickel PVD

[BG] Black Gloss PVD

[BS] Black Satin PVD

[BZ] Bronze PVD

[BZ-XD] Dark Bronze PVD










TYPE:	
CAT. #: HPL6C-	

HPL6C MADAGASCAR

PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/hpl6c-madagascar/

Mounting Height - 2 Feet

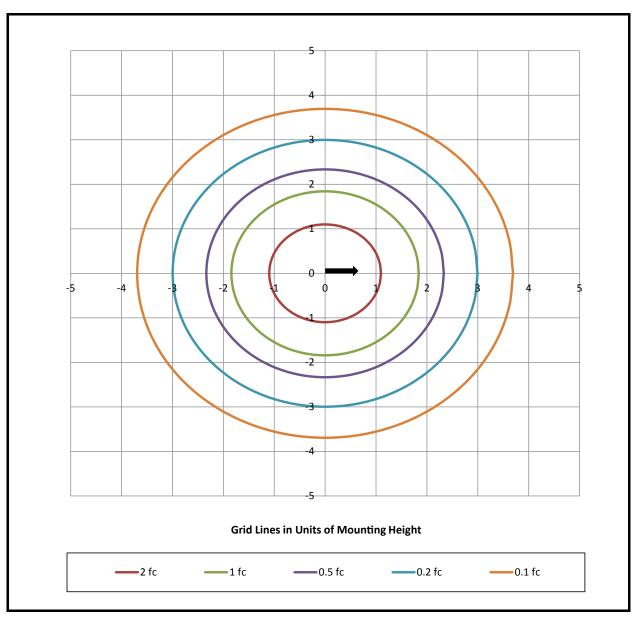

BUG Rating B0 U1 G0



