





HPL8-NAT

The **HPL8 Corona** combines elegance with exceptional performance; it is an essential tool for illuminating intimate gardens, meandering walkways, and large paved areas. With a timeless design, precision manufacturing, and the highest quality materials, our HPL luminaires are the clear choice. Every HPL series path light includes a Thermally Integrated® Field Serviceable LED Module. Using Copper Core Technology®, the HPL LED module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency, and long life!

**Features include:**

- Interchangeable LED Module in 2.5, 3.5 or 5 Watts
- Up to 197 Lumens
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

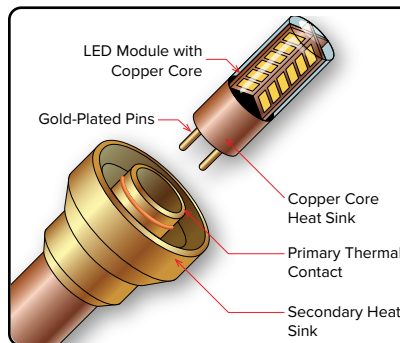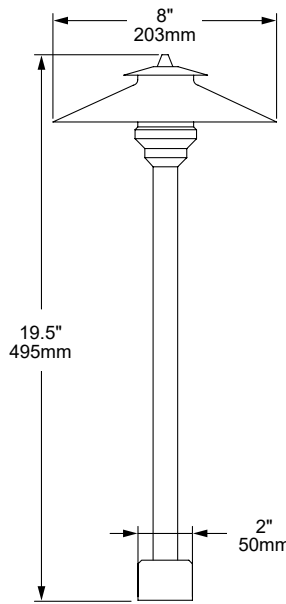

### COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.







**SEE NEXT PAGE FOR ORDERING INFORMATION**




## HPL8 CORONA

**ORDERING GUIDE:** <sup>Prefix</sup> **HPL8** H (HIGH PERFORMANCE) PL (PATH LIGHT) 8 (INCHES)

INDICATES REQUIRED FIELD     INDICATES OPTIONAL FIELD     INCLUDED IN BASE PRICE    [ \_ ] QUICK SPEC (See Below)

**QUICK SPEC SKU**    **HPL8-327-2GS-NAT**


<b>HPL8</b>				
	<p><b>Auroralight LED Module</b> ✓</p> <p><b>[227]</b> 2.5 Watts, 2700K</p> <p><b>[230]</b> 2.5 Watts, 3000K</p> <p><b>[327]</b> 3.5 Watts, 2700K</p> <p><b>[330]</b> 3.5 Watts, 3000K</p> <p><b>[527]</b> 5 Watts, 2700K</p> <p><b>[530]</b> 5 Watts, 3000K</p>	<p><b>ACCESSORIES</b></p> <p>(Select One)</p> <p><b>[180]</b> 180° Directional Reflector™ *</p> <p><b>[270]</b> 270° Directional Reflector™ *</p> <p><b>[ID]</b> Internal Diffuser (Frosted)</p> <p>* Visible light</p>	<p><b>MOUNT</b></p> <p>NO MOUNT:</p> <p><b>[1/2]</b> 1/2" Male Thread</p> <p>GROUND:</p> <p><b>[2GS]</b> Ground Stake w 2" Cap ✓</p> <p><b>[3GS]</b> Ground Stake w 3" Cap</p> <p><b>[325GS]</b> Ground Stake w 3 1/4" Cap</p> <p><b>[DS]</b> Deluxe Spike 9"</p> <p><b>[TR-12]</b> Trident Spike</p> <p><b>[JB3-S]</b> 3" J-Box w/ Stake</p> <p><b>[PB-S]</b> Power Box w/ Stake (Inc. 60W 120-12V trans.)</p> <p><b>[PM-60]</b> 4" Pedestal Mount</p> <p>SURFACE:</p> <p><b>[SM2]</b> 2 1/4" Surface Mount</p> <p><b>[SM3]</b> 3 1/4" Surface Mount</p>	<p><b>FINISH</b></p> <p>STANDARD:</p> <p><b>[NAT]</b> Natural ✓</p> <p>PLUS (\$):</p> <p><b>[BLP]</b> Bronze Living Patina</p> <p><b>[BLP-XD]</b> BLP Extra Dark</p> <p>PREMIUM (\$\$\$):</p> <p><b>[NI]</b> Nickel PVD</p> <p><b>[BG]</b> Black Gloss PVD</p> <p><b>[BS]</b> Black Satin PVD</p> <p><b>[BZ]</b> Bronze PVD</p> <p><b>[BZ-XD]</b> Dark Bronze PVD</p>

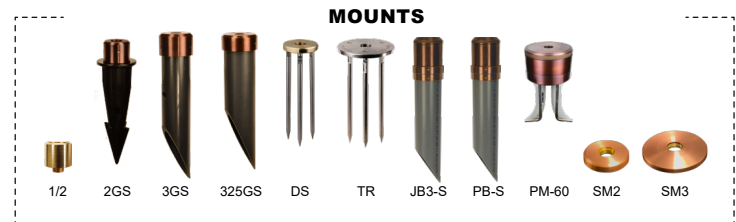

## PHOTOMETRIC OVERVIEW

Information based on 5 Watts. To download more in-depth IES photometric data, visit [auroralight.com/product/hpl8-corona/](http://auroralight.com/product/hpl8-corona/)

Mounting Height - 2 Feet

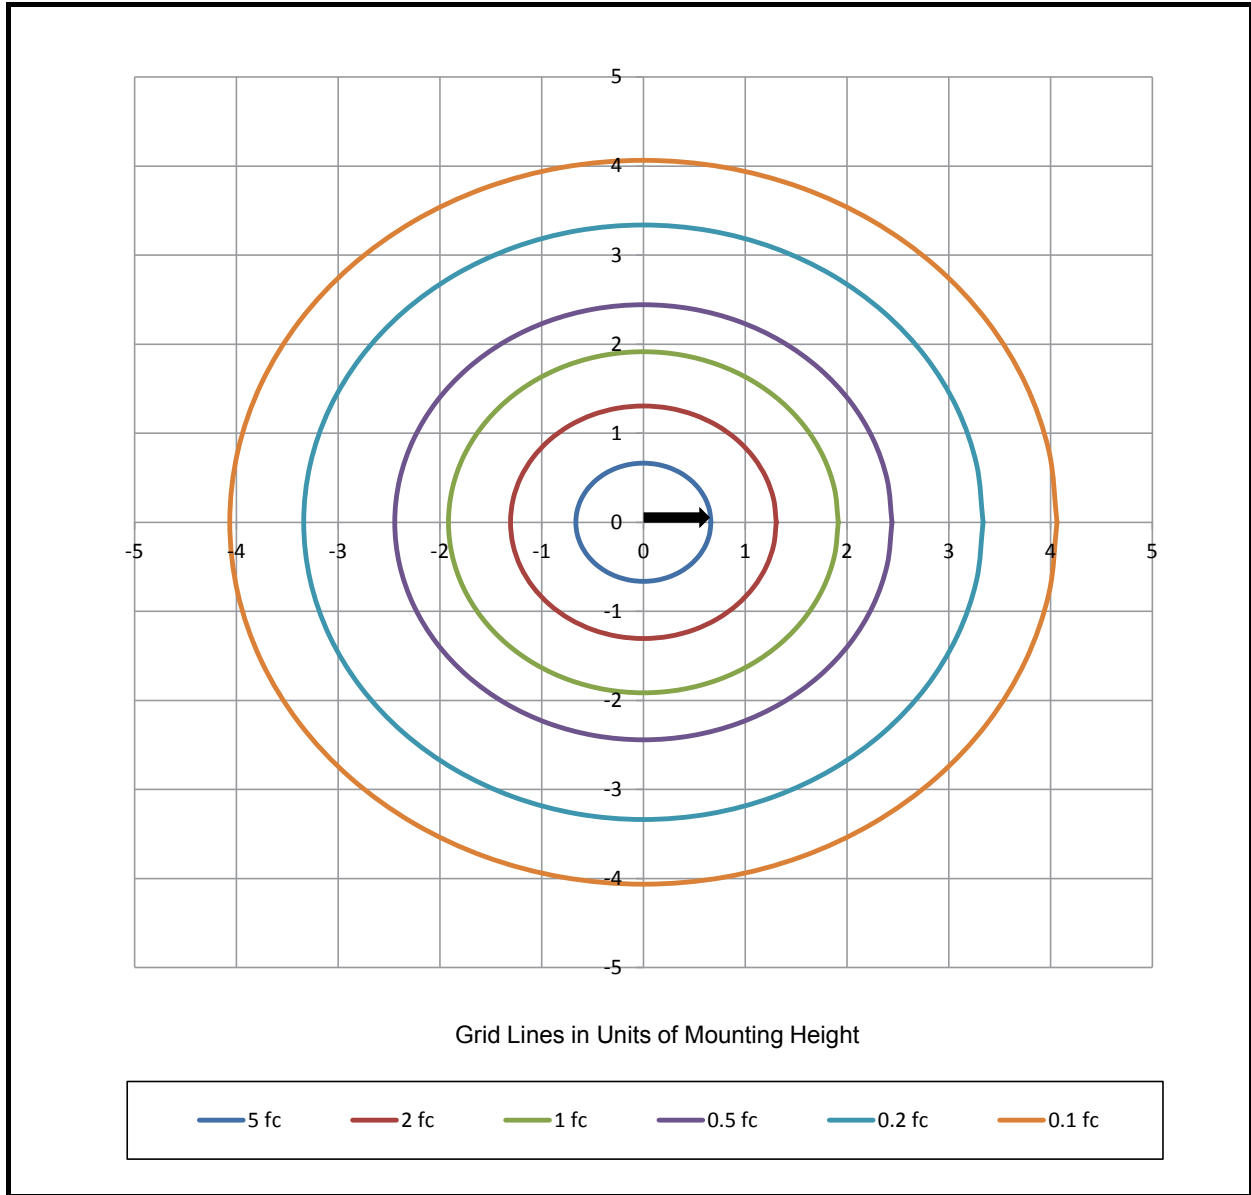

**BUG Rating** B0 U1 G0