



HPL9 SERENGETI





HPL9-NAT

The **HPL9 Serengeti** path lights feature an elegant copper shade that looks stylish in any setting. They're a gracious addition to any landscape and are sure to blend seamlessly with almost any theme or style of architecture. Every HPL series path light includes a Thermally Integrated® Field Serviceable LED Module. Using Copper Core Technology®, the HPL LED module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency, and long life!

Features include:

- Interchangeable LED Module in 2.5, 3.5 or 5 Watts
- Up to 193 Lumens
- 2700K (80 CRI) or 3000K (80 CRI)
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- Contact Factory for Custom Height

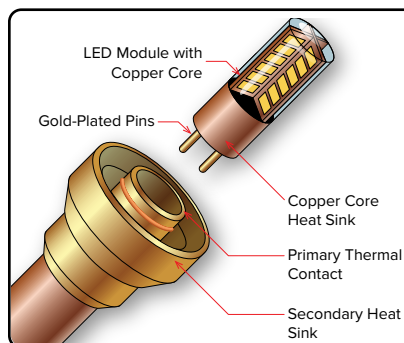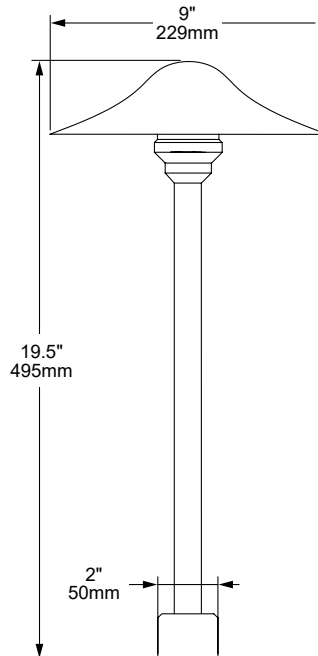

**COPPER
CORE
TECHNOLOGY®**

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



thermally
integrated



SEE NEXT PAGE FOR ORDERING INFORMATION

HPL9 SERENGETI



ORDERING GUIDE: ^{Prefix} **HPL9** H (HIGH PERFORMANCE) PL (PATH LIGHT) 9 (INCHES)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU HPL9-327-2GS-NAT

HPL9

Auroralight LED Module ✓

[227] 2.5 Watts, 2700K
[230] 2.5 Watts, 3000K
[327] 3.5 Watts, 2700K
[330] 3.5 Watts, 3000K
[527] 5 Watts, 2700K
[530] 5 Watts, 3000K

ACCESSORIES

(Select One)
[180] 180° Directional Reflector™ *
[270] 270° Directional Reflector™ *
[ID] Internal Diffuser (Frosted)

* Visible light

MOUNT

NO MOUNT:
[1/2] 1/2" Male Thread
GROUND:
[2GS] Ground Stake w 2" Cap ✓
[3GS] Ground Stake w 3" Cap
[325GS] Ground Stake w 3 1/4" Cap
[DS] Deluxe Spike 9"
[TR-12] Trident Spike
[JB3-S] 3" J-Box w/ Stake
[PB-S] Power Box w/ Stake
(Inc. 60W 120-12V trans.)
[PM-60] 4" Pedestal Mount
SURFACE:
[SM2] 2 1/4" Surface Mount
[SM3] 3 1/4" Surface Mount

FINISH

STANDARD:
[NAT] Natural ✓
PLUS (\$):
[BLP] Bronze Living Patina
[BLP-XD] BLP Extra Dark

ACCESSORIES




180

270

ID

MOUNTS

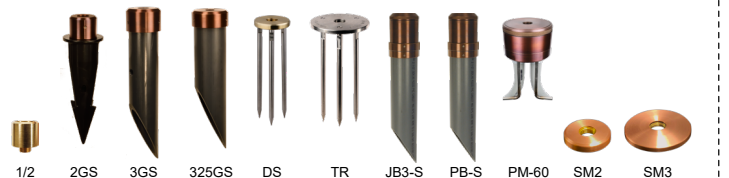

1/2

2GS

3GS

325GS

DS

TR

JB3-S

PB-S

PM-60

SM2


SM3

HPL9 SERENGETI

PHOTOMETRIC OVERVIEW

Information based on 5 Watts. To download more in-depth IES photometric data, visit auroralight.com/product/hpl9-serengeti/

Mounting Height - 2 Feet

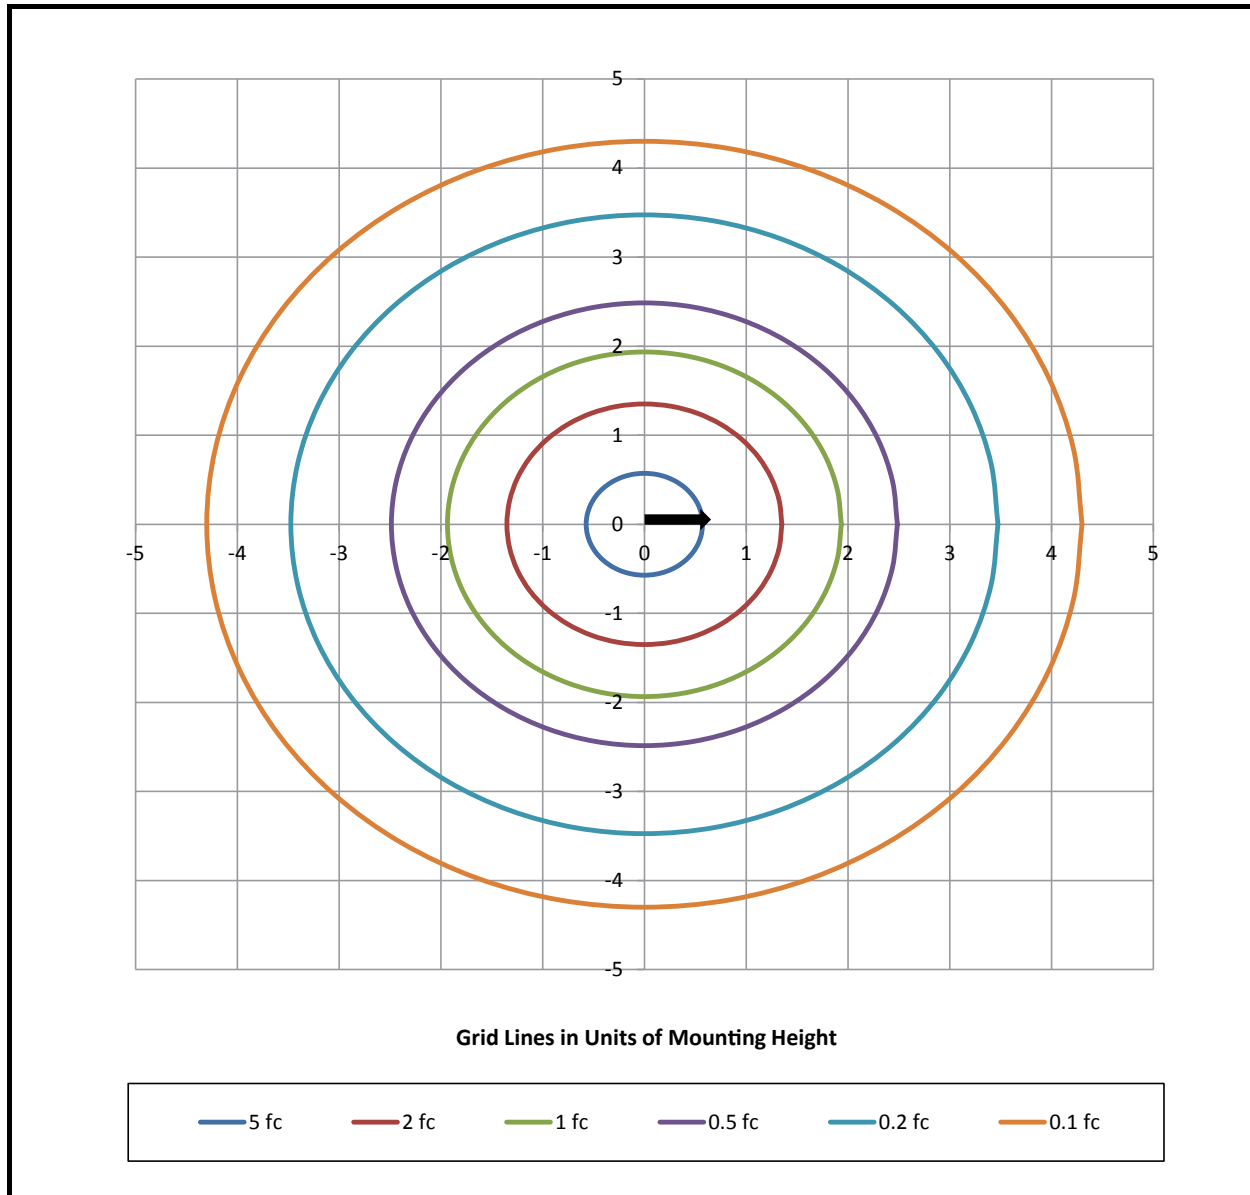

BUG Rating

B0 U1 G0