




HSL20-XO OMEGA

The **HSL20-XO Omega** borrows the best features from over five generations of our classic workhorse SL16 series fixture. The all-new HSL20-XO directional is a full featured aggressively priced luminaire intended for use with open source MR16 sized LED lamps. The HSL20-XO is field convertible to our high performance LM16 "Designer Module" should the need arise. Additionally, the Storm Drain system has been combined with a flushing edge to expel debris. The new sleek and compact design is 30% lighter than our HSL16 Telluride; the Omega is an exceptional value; Offered in 2 versions: (LM, & XO) to meet the specific demands of our top tier customers.


Features include:

- Variety of MR16 Lamp Options
- 2700K (90 CRI) or 3000K (90 CRI)
- Storm Drain™ Lens Drainage System
- Aurora Mount System (AMS™) Compatible
- Solid Brass Construction
- Compatible with 4, 6, 8 or 12 Watts "Designer LED Module"

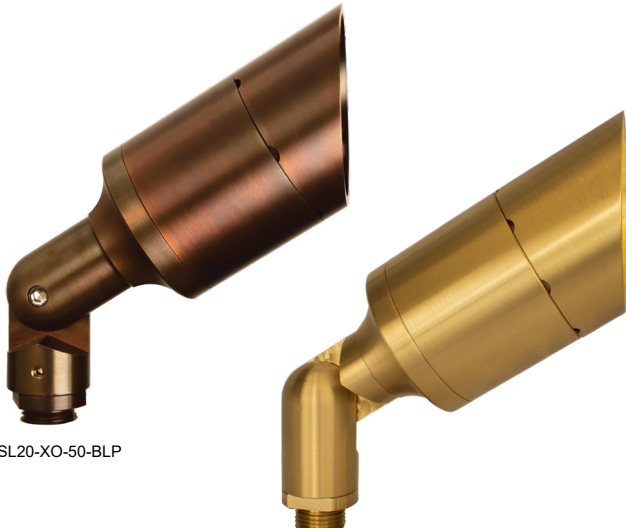


HSL20-XO-50-BLP


HSL20-XO-60-NAT

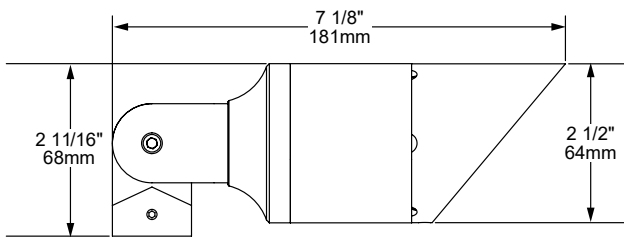

[50] 50° Angled Shield

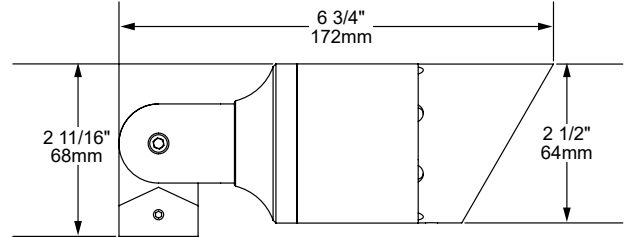

[60] 60° Angled Shield

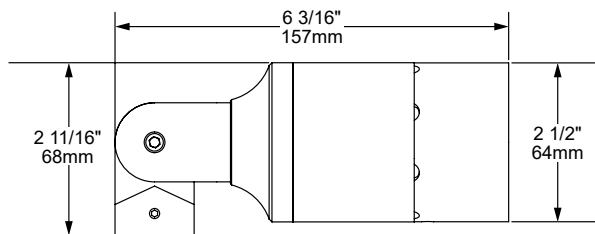

[90] 90° Straight Shield

STORM DRAIN

Auroralight's proprietary Storm Drain™ system provides exceptional glare control together with enhanced drainage. The secret is our Exclusive "Linear Weep Hole" With eight or more such holes; water flushes out quickly and entirely with zero light trespasses. Auroralight, Engineering Solutions that make a difference!

AMS
AURORA MOUNT SYSTEM

The Aurora Mount System (AMS™) features 2 axis of adjustment – 360° of fixture rotation at the mount and 230° at the solid brass knuckle. The ultimate in precision aiming without twisting or compromising wire integrity.

12V
STORM DRAIN
IP67

SEE NEXT PAGE FOR ORDERING INFORMATION



TYPE:

CAT. #: HSL20-XO-

HSL20-XO OMEGA

ORDERING GUIDE: **HSL20-XO** H (HIGH PERFORMANCE) SL (SPOTLIGHT) 20 (SERIES) XO (NO LAMP)

☐ INDICATES REQUIRED FIELD ☐ INDICATES OPTIONAL FIELD ✓ INCLUDED IN BASE PRICE [_] QUICK SPEC (See Below)

QUICK SPEC SKU HSL20-XO-50-7-W-27-ARW-H-AGS-NAT

HSL20-XO

SHIELD ✓

- [NS] No Shield
- [50] 50° Angled Shield
- [60] 60° Angled Shield
- [90] 90° Straight Shield

WATTAGE

- [3] 3 Watts
- [5] 5 Watts
- [7] 7 Watts

OPTIC

- [N] 15° Narrow
- [M] 24° Medium
- [W] 36° Wide
- [WF] 60° Wide Flood
- [SF] 120° Super Flood

LED COLOR

- [27] 2700K, 90 CRI
- [30] 3000K, 90 CRI

ACCESSORIES

- [ARW-H] Hex Baffle
- [ARW-L] Linear Spread
- [ARW-F] Frost (Diffusion)

RISER

EXTENDABLE (EXTR):

- [5X10] 5x10"
- [7X14] 7x14"
- [9X18] 9x18"
- [11X22] 11x22"
- [18X36] 18x36"

SUBTERRANEAN (EXTENDABLE):

- [STR-12] 12" above grade 13 1/2" below
- [STR-18] 18" above grade 19 1/2" below

FIXED:

- [FR-4] 4"
- [FR-8] 8"
- [FR-12] 12"
- [FR-16] 16"
- [FR-18] 18"

90° & TEE OPTIONS:

Add **-90** (for 90°) or **-T** (for Tee) to any of the riser part numbers above.

NOTE: Risers are not compatible with AMS Mounts.

MOUNT

NO MOUNT:

- [1/2] 1/2" (NPS) Universal Thread ✓

GROUND:

- [AGS] AMS Ground Stake
- [2GS] Ground Stake w/ 2" Cap
- [3GS] Ground Stake w/ 3" Cap
- [325GS] Ground Stake w/ 3 1/4" Cap
- [DS] 9" Deluxe Spike
- [TR-12] 12" Trident Spike
- [JB3-S] 3" Junction Box w/ PVC Stake
- [PB-S] Power Box w/ PVC Stake Incl. w/ 60W 120-12V Trans.
- [PM-60-1] Concrete Pedestal Mount w/ 60W 120-12V Trans. (Single Hole/One Fixture)
- [PM-60-2] Concrete Pedestal Mount w/ 60W 120-12V Trans. (Double Hole/Two Fixtures)

TREE:

- [TS-HD-36] 36" AMS Tree Strap - Heavy Duty
- [BTM] Bolt-On Tree Mount
- [STM] Screw-In Tree Mount

SURFACE:

- [SMJB-1] Surface Mount J-Box (Single Hole/One Fixture) w/ 5 KO
- [SMJB-2] Surface Mount J-Box (Double Hole/Two Fixtures) w/ 5 KO
- [SM2] 2" Surface Mount
- [SM3] 3" Surface Mount
- [TM] AMS Trellis Mount
- [SB] AMS Splice Box

COVER PLATE:

- [CP35-BR] 3 1/2" Brass Cover Plate
- [CP14] 4" AMS J-Box Cover Plate
- [CP4-BR] 4" Brass Cover Plate
- [CP45-BR] 4 1/2" Brass Cover Plate
- [MC45-1] 4 1/2" Mount Canopy (Single Hole/One Fixture)
- [MC45-2] 4 1/2" Mount Canopy (Double Hole/Two Fixtures)
- [PC-60-1] 4 1/2" Power Canopy Incl. w/ 60W 120-12V Trans. (Single Hole/One Fixture)
- [PC-60-2] 4 1/2" Power Canopy Incl. w/ 60W 120-12V Trans. (Double Hole/Two Fixtures)

NOTE: Universal adapter included w/ fixture, except where AMS is noted. Most common configurations listed above; See Mount/Riser spec sheets for all options.

FINISH

STANDARD:

- [NAT] Natural ✓


PLUS (\$):

- [BLP] Bronze Living Patina
- [BLP-XD] BLP Extra Dark


PREMIUM (\$\$\$):

- [NI] Nickel PVD
- [BG] Black Gloss PVD
- [BS] Black Satin PVD
- [BZ] Bronze PVD
- [BZ-XD] Dark Bronze PVD

ACCESSORIES




MOST POPULAR MOUNT OPTIONS

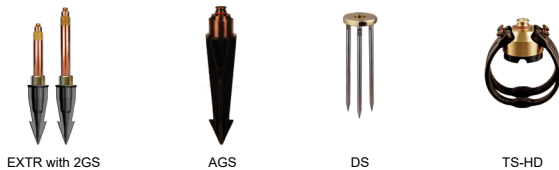


GROUND




COVER PLATE



EXTENDABLE




SUBTERRANEAN (EXTENDABLE)



FIXED



SURFACE

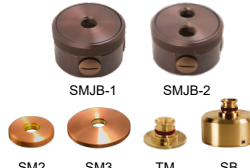

TREE

