



TYPE:

CAT. #: LSMR6-

LSMR6 LUMISTEP



LSMR6-BLP

The **LSMR6 Lumistep** is a surface-mounted, high-performance LED wall light that offers excellent illumination of walls and walkways mounted at 24 to 36" height or subtle, well-distributed light when mounted low on a stair riser. Stylish, rugged, and functional, the LSMR6 Lumistep is meticulously carved from a solid brass bar using sophisticated CNC machinery. This low-profile luminaire is designed to be surface mounted with the included back-plate. The LSMR6 is an estate quality luminaire available exclusively from Auroralight.

Features Include:


- IP66 Rated when Properly Installed for Exterior Wet Location Use
- Precision Machined Solid Brass for Harsh Environments

Light Source:

- 1 or 3 Watts, Up to 110 Lumens
- Field Serviceable Light Module
- 2700K (90CRI), or 3000K (80CRI)

Electrical:

- Integral 12v AC to DC Constant Current Driver for Simple Installation
- Dimmable to <10% for Extensive Flexibility
- · Compatible with Class 2 MLV or ELV AC Power Supplies

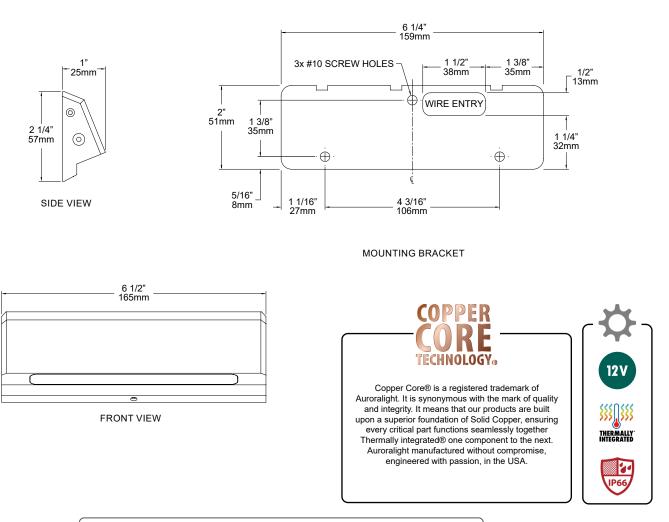

SEE NEXT PAGE FOR ORDERING INFORMATION



MADE ∗USA*



TYPE:

CAT. #: LSMR6-


LSMR6 LUMISTEP



Profi

ORDERING GUIDE: (LSMR6) L (LED) SM (SURFACE MOUNT) R (RECTANGLE) 6 (SERIES)

INDICATES REQUIRED FIELD (III)INDICATES OPTIONAL FIELD / INCLUDED []QUICK SPEC (See Below)

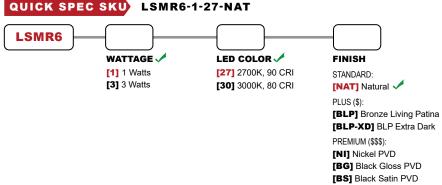

[NI] Nickel PVD [BG] Black Gloss PVD [BS] Black Satin PVD [BZ] Bronze PVD [BZ-XD] Dark Bronze PVD [PC] Powder Coat Custom Color (Contact Factory for Color Options)







TYPE:


CAT. #: LSMR6-

LSMR6 LUMISTEP

PHOTOMETRIC OVERVIEW

Information based on 3000K. To download more in-depth IES photometric data, visit Auroralight.com/product/Ismr6-Iumistep/

Mounting Height - 2 Feet

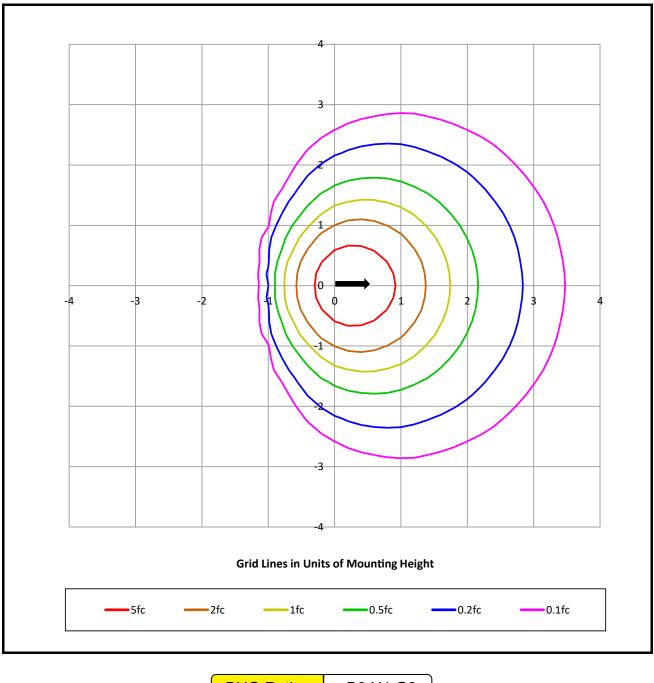

BUG Rating B0 U1 G0



