

AURORALIGHT

REQUIRED TOOLS:


3/32" Allen Key (Included)
Wire Cutter / Stripper

ARIEL INSTALL GUIDE

UDW427144

INSTRUCTIONS:

1. To prevent electrical shock, disconnect transformer from electrical supply and make sure power supply is completely off before installation. Fixtures should always be installed by a licensed electrician.
2. Remove the **fixture** from the **mount bracket** by unscrewing the **wing nut** and sliding out (see figure). Set aside and take caution to not lose any of the hardware or O-rings from that area.
3. Secure the **mount bracket** in the desired wet or dry location using the provided **mount screws** and/or anchors if mounting in stone or tile (a 1/8" pilot hole is recommended when mounting in wood).
4. Run the **2x 20AWG cable** to a dry location nearby. Separate the 2 internal conductors by stripping the large outer insulation first, then strip about 1/4" off the end of each individual conductor (see figure).
5. Reattach the **fixture** to the **mount bracket** and tighten down the wing nut by hand (see figure).
6. Rotate the **fixture** on the post to aim in it in the desired direction.
7. Connect the **20AWG wires** to the **main supply cable** using **UL listed connectors** suitable for underground and wet location as well as the appropriate UL listed underground feeder (UF) cable (see figure).

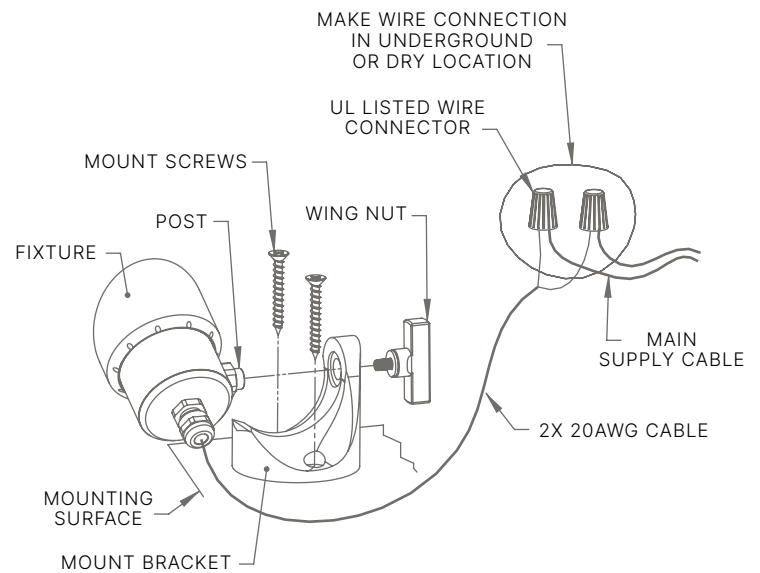

Important! This fixture is assembled and sealed at the factory, do not unscrew any of the pre-assembled caps or the cord seal. Doing so could result in leakage and failure.

P. 760.931.2910

E. techsupport@auroralight.com

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

WARNING: Luminaire must be installed in accordance with local codes and the National Electrical Code (NEC). Failure to do so may result in serious injury and or damage to the luminaire.

WARNING: Risk of electric shock. Install per NEC Code 680.22(B (6), if listed low voltage luminaires are to be located near a pool, spa or fountain.