



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300



Photometric Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-2002

Prepared For
Auroralight Inc

2742 Loker Avenue West
Carlsbad
CA, 92010
United States

Catalog Number

HPL6-3-27

Order Number

11745044

Test Number

11745044.13

Test Date

2017-05-12

Prepared By

Javier Caban, Technician

Approved By

Tiffany Hamm, Project Handler

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Luminaire Description: Conical 6" copper shade with clear glass lens, cylindrical copper stem and brass base
Lamp: 64 white LEDs
Mounting: Path/Area
Ballast/Driver: Integrated

Luminaire



Luminaire Characteristics

Luminous Diameter: 6.00 in.

Summary of Results

Roadway Classification:	Type V, Short
Cutoff Classification:	Cutoff
BUG Rating:	B0 U1 G0

Test Conditions

Test Temperature:	25.4 °C
Voltage:	12.01 VAC
Current:	0.4960 A
Power:	3.341 W
Power Factor:	0.561
Frequency:	60 Hz
Current THD:	77.8 %

Tested in 30 planes left side, 30 planes right side, left and right averaged
Vertical test increments are 2.5 degrees
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance
Ballast factors have not been applied



Distribution - Goniophotometer

Distribution Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
25.4 °C	12.01 VAC	0.4960 A	3.341 W	0.561	60 Hz	77.8 %

Summary of Results

Spacing Criteria

0-180: 2.35
90-270: 2.35

Total Lumen Output:

133.8 Lumens


Luminaire Efficacy:

40.0 lm/w

Maximum Candela:

36 Candela

Polar Plot

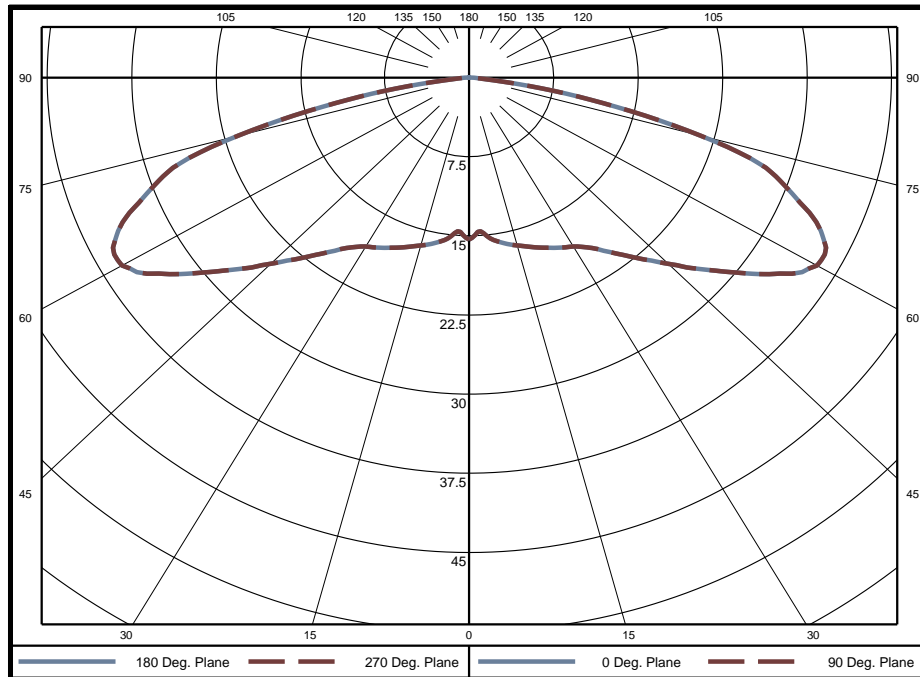

Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	0.35	0.3%	60-65	17.21	12.9%	120-125	0.01	0.0%
5-10	1.11	0.8%	65-70	16.29	12.2%	125-130	0.01	0.0%
10-15	1.92	1.4%	70-75	13.77	10.3%	130-135	0.01	0.0%
15-20	2.77	2.1%	75-80	7.91	5.9%	135-140	0.01	0.0%
20-25	3.67	2.7%	80-85	2.21	1.7%	140-145	0.01	0.0%
25-30	4.60	3.4%	85-90	0.36	0.3%	145-150	0.01	0.0%
30-35	5.63	4.2%	90-95	0.10	0.1%	150-155	0.01	0.0%
35-40	7.00	5.2%	95-100	0.04	0.0%	155-160	0.01	0.0%
40-45	8.71	6.5%	100-105	0.03	0.0%	160-165	0.01	0.0%
45-50	10.81	8.1%	105-110	0.02	0.0%	165-170	0.00	0.0%
50-55	13.26	9.9%	110-115	0.02	0.0%	170-175	0.00	0.0%
55-60	15.86	11.9%	115-120	0.02	0.0%	175-180	0.00	0.0%

Zone	Lumens	% of Luminaire
0-40	27	20.2%
0-60	76	56.6%
0-90	133	99.7%
90-180	0	0.2%



Candela Tabulation

Horizontal Angle (Degrees)

Vertical Angle (Degrees)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
	0	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36
	5	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81	14.81
	10	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85
	15	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48	16.48
	20	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13	17.13
	25	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82	17.82
	30	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50	18.50
	35	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85	19.85
	40	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14	22.14
	45	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98	24.98
	50	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49	28.49
	55	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51	32.51
	60	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64	35.64
	65	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42	34.42
	70	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72	29.72
	75	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22	21.22
	80	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79	8.79
	85	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14
	90	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38
	95	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09
	100	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
	105	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
	110	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	115	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	120	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	125	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	130	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	135	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	140	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	145	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	150	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	155	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	165	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	170	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	175	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	180	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03

Average Luminance (cd/m²)

Horizontal Angle (Degrees)

Vertical Angle (Degrees)	0	45	90
	0	842	842
	45	1937	1937
	55	3107	3107
	65	4465	4465
	75	4495	4495
	85	717	717



Utilization of Lumens - Zonal Cavity Method

Effective Floor Cavity Reflectance 20%																		
Ceiling Cavity Reflectance	80				70				50			30			10			0
Wall Reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Room Cavity Ratio (RCR)	** Values are expressed as Lumens delivered to the task surface **																	
0	159	159	159	159	155	155	155	155	148	148	148	142	142	142	136	136	136	133
1	141	133	125	118	137	129	123	116	123	118	113	118	113	109	113	109	106	102
2	124	109	98	88	120	107	96	86	101	92	84	97	89	82	92	86	80	77
3	109	91	78	67	106	89	76	66	85	74	64	81	71	63	77	69	62	58
4	98	78	63	52	94	76	62	52	72	60	51	69	58	50	65	56	49	46
5	88	67	53	42	85	66	52	42	62	50	41	60	49	40	57	47	40	36
6	80	59	45	34	77	58	44	34	55	43	34	52	42	33	50	40	33	30
7	74	52	39	29	71	51	38	29	49	37	28	47	36	28	45	35	28	25
8	68	47	34	25	65	46	33	25	44	32	24	42	32	24	40	31	24	21
9	63	42	30	21	61	42	30	21	40	29	21	38	28	21	37	28	21	18
10	59	39	27	19	57	38	26	19	37	26	19	35	25	18	34	25	18	16


Beam and Field Information	
CIE Type:	Direct
Center Beam Intensity:	15.36 Candela
Central Cone Intensity:	15 Candela
Beam Flux:	131.3 Lumens
Beam Angle (0-180):	161.0 Degrees
Beam Angle (90-270):	161.0 Degrees
Field Angle (0-180):	168.2 Degrees
Field Angle (90-270):	168.2 Degrees

Cone of Light Tabulation			
Mounting Height (Feet)		Footcandles at Nadir	Diameter (Feet)
4.00		0.960	9.40
6.00		0.427	14.1
8.00		0.240	18.8
10.0		0.154	23.5
12.0		0.107	28.2
14.0		0.0784	32.9
16.0		0.0600	37.6




ISOFootcandle Plot

Mounting Height - 2 Feet

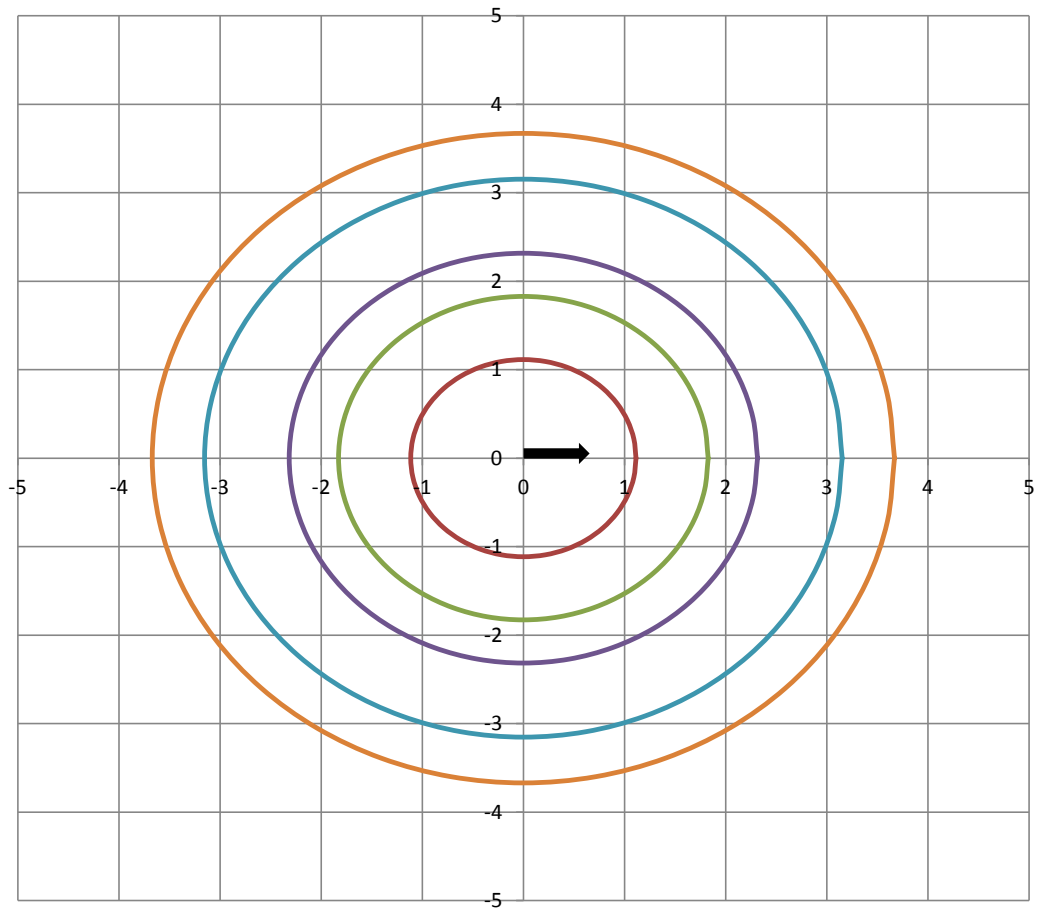


Grid Lines in Units of Mounting Height





IES "BUG" Rating
(Back Light, Uplight, Glare)
Per IES TM-15-11

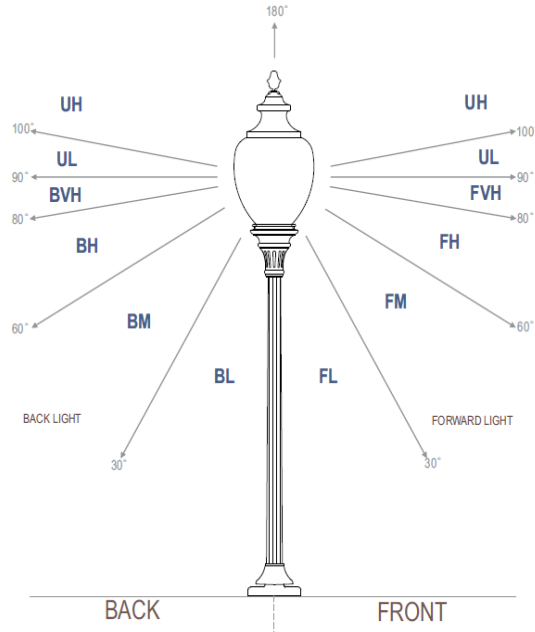

Luminaire Classification System (LCS)

LCS	Zone	Lumens	Luminaire %
FL	(0-30)	7.2	5.4%
FM	(30-60)	30.6	23.0%
FH	(60-80)	27.4	20.5%
FVH	(80-90)	1.3	1.0%
BL	(0-30)	7.2	5.4%
BM	(30-60)	30.6	23.0%
BH	(60-80)	27.4	20.5%
BVH	(80-90)	1.3	1.0%
UL	(90-100)	0.1	0.1%
UH	(100-180)	0.2	0.1%
Total		133.5	100.0%
BUG Rating	B0 U1 G0		