AURORALIGHT

CENTRO

RDL331103

Building upon the success of our esteemed In-grades, we are proud to introduce the latest addition to our lighting portfolio - the Centro downlight; employing our remarkably versatile light module.

- •IP67 Rated for Interior or Exterior Wet Location Use
- •IC Rated for Insulation Contact, UL Class 2
- Thermally Regulated for Maximum Performance

·Ideal for overhangs, eaves and architectural features

CONFIGURATOR:

	LED	FINISH	
RDL331103	·		
() = Most common	(2704) 2700K 4W	(NAT) Natural Brass	
configuration	(2706) 2700K 6W	(BLP) Bronze Living Patina	
conngaration	(3004) 3000K 4W	(BLPX) Extra Dark BLP	
	(3006) 3000K 6W	(NI) Nickel PVD	

FIXTURE DIMENSIONS	L2-3/8" x D3-1/4"		
LIGHT SOURCE	Integrated LED		
COLOR TEMPERATURES	2700K, 3000K		
WATTAGES	4W, 6W		
CRI (RA)	80 CRI		
VOLTAGE	12V		
DELIVERED LUMENS	420Im (3000K 6W)		
DIMMABLE	Yes, Dim to <10% via Transformer		
DRIVER	Yes, 12V Integral Constant Current		
TRANSFORMER	No, 12V AC/DC Transformer Required		
MOUNT	Yes, Aluminum Torsion Springs		
ACCESSORIES	Yes, Not Included		
OPTICS	Yes, Included 20°, 40° & 60°		
FINISH	Included Natural Brass		
MATERIAL	Brass		
WIRE LENGTH	24"		
LOCATION	Interior or Exterior Wet		
CERTIFICATIONS	UL, IP66, IP67, IC, Dark Sky		

*For complete warranty terms, please visit: www.auroralight.com/warranty/

P. 760.931.2910

- O. 2742 Loker Ave. W Carlsbad CA 92010
- W. www.auroralight.com

PROJECT:

SKU #:

TYPE:



AVAILABLE FINISHES:








NAT Natural Brass

BLP Bronze Living Patina

BLPX Extra Dark Bronze Living Patina

NI Nickel PVD

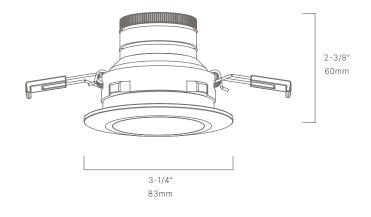



AURORALIGHT

PROJECT:

SKU #:

TYPE:

H003

ADD-ONS

ACCESSORIES

H003	Hex Baffle	 ACCESSORIES]
SBH113	Stepped Baffle		

SBH113

P. 760.931.2910

O. 2742 Loker Ave. W Carlsbad CA 92010



