



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300



Photometric Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-2002

Prepared For
Auroralight Inc

2742 Loker Avenue West
Carlsbad
CA, 92010
United States

Catalog Number

HPL5-3-30

Order Number

11745044

Test Number

11745044.10

Test Date

2017-05-10

Prepared By

Javier Caban, Technician

Approved By

Tiffany Hamm, Project Handler

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Luminaire Description: Conical 5" copper shade with clear glass lens, cylindrical copper stem and brass base
Lamp: 64 white LEDs
Mounting: Path/Area
Ballast/Driver: Integrated

Luminaire



Luminaire Characteristics

Luminous Diameter: 3.75 in.

Summary of Results

Roadway Classification:	Type V, Short
Cutoff Classification:	Cutoff
BUG Rating:	B0 U1 G0

Test Conditions

Test Temperature:	25.6 °C
Voltage:	12.00 VAC
Current:	0.4869 A
Power:	3.275 W
Power Factor:	0.561
Frequency:	60 Hz
Current THD:	78.8 %

Tested in 30 planes left side, 30 planes right side, left and right averaged
Vertical test increments are 2.5 degrees
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance
Ballast factors have not been applied



Distribution - Goniophotometer

Distribution Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
25.6 °C	12.00 VAC	0.4869 A	3.275 W	0.561	60 Hz	78.8 %

Summary of Results

Spacing Criteria

0-180: 2.07
90-270: 2.07

Total Lumen Output:

121.6 Lumens


Luminaire Efficacy:

37.1 lm/w

Maximum Candela:

30 Candela

Polar Plot

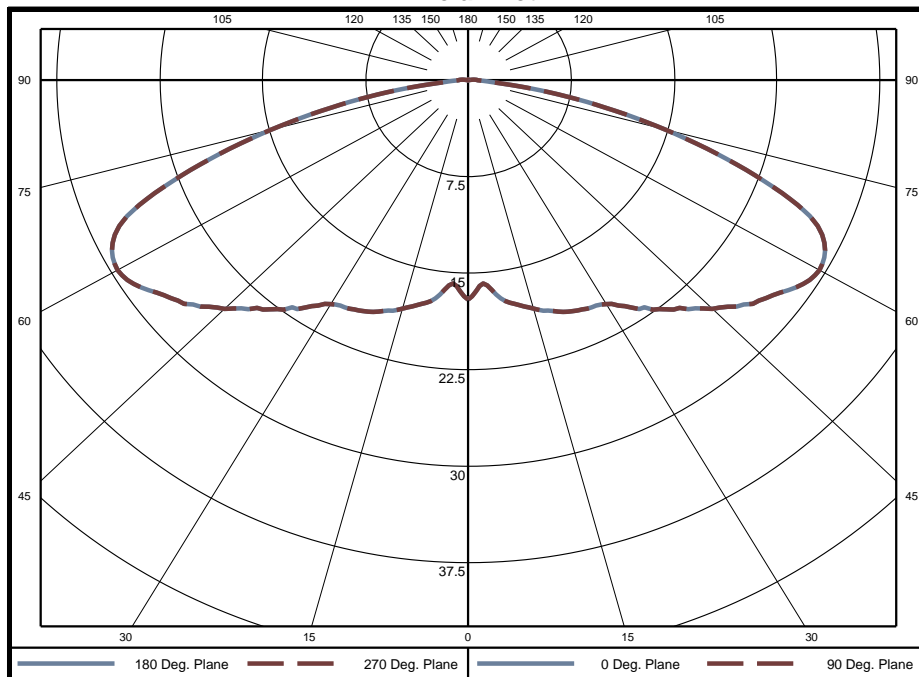

Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	0.39	0.3%	60-65	14.17	11.7%	120-125	0.02	0.0%
5-10	1.21	1.0%	65-70	13.24	10.9%	125-130	0.02	0.0%
10-15	2.13	1.8%	70-75	9.90	8.1%	130-135	0.01	0.0%
15-20	3.10	2.5%	75-80	5.90	4.9%	135-140	0.01	0.0%
20-25	4.08	3.4%	80-85	2.34	1.9%	140-145	0.01	0.0%
25-30	5.02	4.1%	85-90	0.67	0.6%	145-150	0.01	0.0%
30-35	6.14	5.0%	90-95	0.35	0.3%	150-155	0.01	0.0%
35-40	7.49	6.2%	95-100	0.22	0.2%	155-160	0.01	0.0%
40-45	8.93	7.3%	100-105	0.07	0.1%	160-165	0.01	0.0%
45-50	10.53	8.7%	105-110	0.04	0.0%	165-170	0.00	0.0%
50-55	12.03	9.9%	110-115	0.03	0.0%	170-175	0.00	0.0%
55-60	13.46	11.1%	115-120	0.02	0.0%	175-180	0.00	0.0%

Zone	Lumens	% of Luminaire
0-40	30	24.3%
0-60	75	61.3%
0-90	121	99.3%
90-180	1	0.7%



Candela Tabulation

Horizontal Angle (Degrees)

Vertical Angle (Degrees)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
	0	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05	17.05
	5	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01	16.01
	10	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56	17.56
	15	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37	18.37
	20	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14	19.14
	25	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65	19.65
	30	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09
	35	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71	21.71
	40	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27	23.27
	45	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13	25.13
	50	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04	27.04
	55	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44	28.44
	60	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51	29.51
	65	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42	28.42
	70	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92	22.92
	75	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93	14.93
	80	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34	7.34
	85	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90	1.90
	90	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74
	95	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53
	100	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
	105	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09
	110	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
	115	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
	120	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	125	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	130	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	135	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	140	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	145	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	150	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	155	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	165	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	170	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	175	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
	180	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03

Average Luminance (cd/m²)

Horizontal Angle (Degrees)


Vertical Angle (Degrees)	0	45	90
	0	2393	2393
	45	4988	4988
	55	6960	6960
	65	9438	9438
	75	8094	8094
	85	3065	3065



Utilization of Lumens - Zonal Cavity Method

Effective Floor Cavity Reflectance 20%																		
Ceiling Cavity Reflectance	80				70				50			30			10			0
Wall Reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Room Cavity Ratio (RCR)	** Values are expressed as Lumens delivered to the task surface **																	
0	145	145	145	145	141	141	141	141	135	135	135	129	129	129	123	123	123	121
1	129	121	115	109	125	118	113	107	113	108	104	108	104	100	103	100	97	94
2	114	101	91	83	110	99	89	81	94	86	79	90	83	77	86	80	75	72
3	101	86	74	64	98	84	72	63	80	70	62	76	68	61	73	66	60	56
4	91	74	61	51	88	72	60	51	68	58	50	65	56	49	62	54	48	45
5	82	64	51	42	79	62	50	41	60	49	41	57	47	40	54	46	40	37
6	75	56	44	35	72	55	43	35	53	42	34	50	41	34	48	40	33	30
7	69	50	38	29	67	49	37	29	47	37	29	45	36	29	43	35	28	26
8	64	45	33	25	62	44	33	25	42	32	25	41	31	25	39	31	24	22
9	59	41	30	22	57	40	29	22	38	29	22	37	28	22	36	27	21	19
10	55	37	27	20	53	37	26	20	35	26	19	34	25	19	33	25	19	17


Beam and Field Information	
CIE Type:	Direct
Center Beam Intensity:	17.05 Candela
Central Cone Intensity:	16 Candela
Beam Flux:	117.0 Lumens
Beam Angle (0-180):	158.4 Degrees
Beam Angle (90-270):	158.4 Degrees
Field Angle (0-180):	171.2 Degrees
Field Angle (90-270):	171.2 Degrees

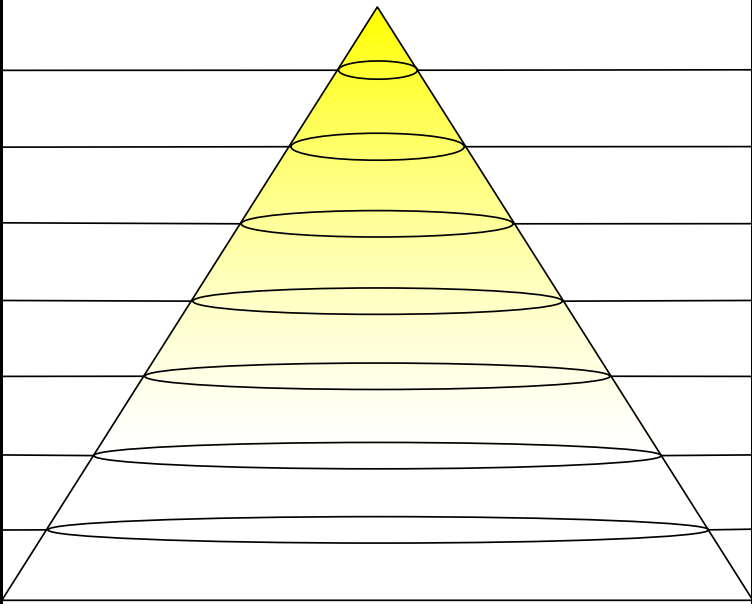Cone of Light Tabulation			
Mounting Height (Feet)		Footcandles at Nadir	Diameter (Feet)
4.00		1.07	8.29
6.00		0.474	12.4
8.00		0.266	16.6
10.0		0.170	20.7
12.0		0.118	24.9
14.0		0.0870	29.0
16.0		0.0666	33.1




ISOFootcandle Plot

Mounting Height - 2 Feet

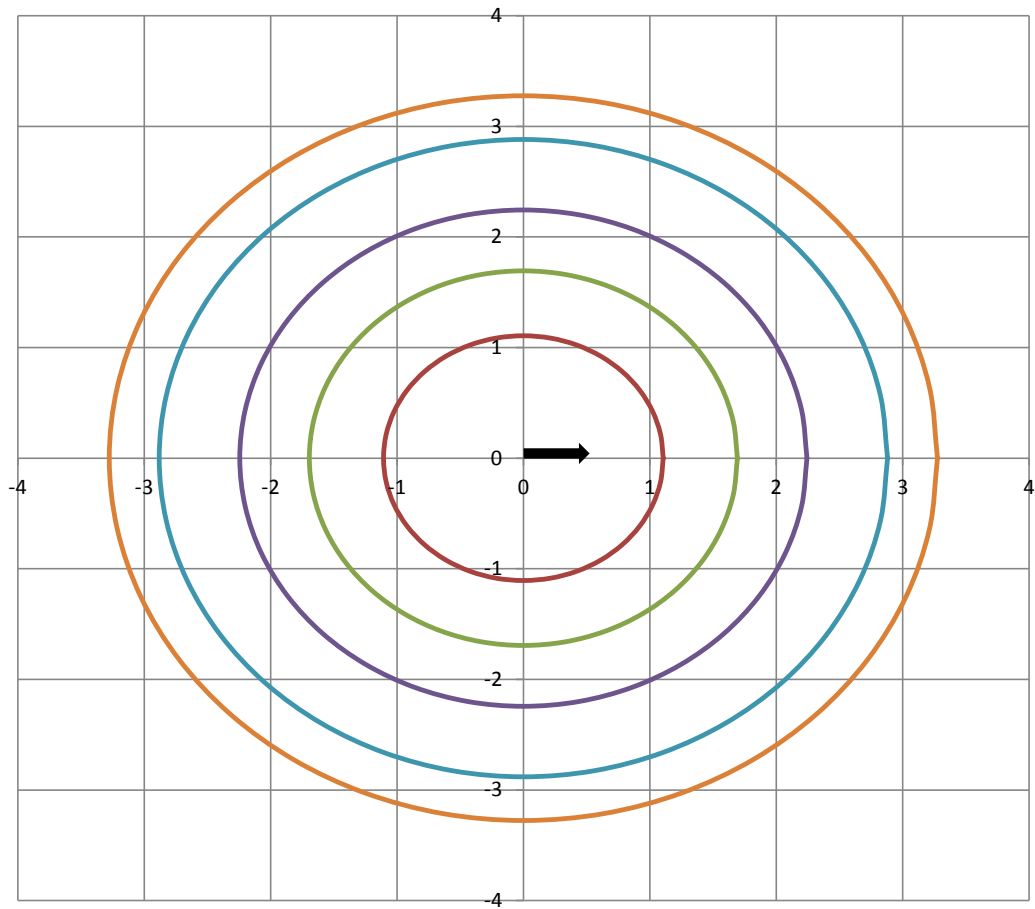

Grid Lines in Units of Mounting Height





IES "BUG" Rating
(Back Light, Uplight, Glare)
Per IES TM-15-11



Luminaire Classification System (LCS)

LCS	Zone	Lumens	Luminaire %
FL	(0-30)	8.0	6.6%
FM	(30-60)	29.2	24.1%
FH	(60-80)	21.4	17.7%
FVH	(80-90)	1.5	1.3%
BL	(0-30)	8.0	6.6%
BM	(30-60)	29.2	24.1%
BH	(60-80)	21.4	17.7%
BVH	(80-90)	1.5	1.3%
UL	(90-100)	0.6	0.5%
UH	(100-180)	0.3	0.2%
Total		121.1	100.0%
BUG Rating	B0 U1 G0		